ATTACHMENT B



Staff Report Zoning Ordinance Text Amendment Z-TA-1-25-Y and Rezoning Case No. Z-3-25-4-7-8

August 29, 2025

Application No. Z-TA-1-25-Y: Amend the Phoenix Zoning Ordinance to address Middle Housing as required by Arizona Revised Statutes, Section 9-462.13, by creating a Middle Housing (MH) Overlay District; and amend various other sections of the Zoning Ordinance to clarify terms and to ensure proper application of related state requirements related to Middle Housing, as follows:

Section 202 (Definitions), Section 507 Tab A (Guidelines for Design Review), Section 608 (Residence Districts), Section 609 (RE-35 Single-Family Residence District), Section 610 (R1-18 Single-Family Residence District), Section 611 (R1-10 Single-Family Residence District), Section 612 (R1-8 Single-Family Residence District), Section 613 (R1-6 Single-Family Residence District), Section 614 (R-2 Multifamily Residence District), Section 615 (R-3 Multifamily Residence District), Section 616 (R-3A Multifamily Residence District), Section 617 (R-4 Multifamily Residence District), Section 618 (R-5 Multifamily Residence District), Section 619 (Residential R-4A District—Multifamily Residence—General), Section 622 (Commercial C-1 District— Neighborhood Commercial), Section 623 (Commercial C-2 District—Intermediate Commercial), Section 624 (Commercial C-3 District—General Commercial), Section 632 (High-Rise H-R1 District—High-Rise and High Density District), Section 701 (Bulk Regulations), Section 702 (Off-Street Parking and Loading), Section 703 (Landscaping, Fences, and Walls), Section 710 (Hillside Development), Section 708 (Temporary uses), Section 1203 (Land Use Matrix, Downtown Code), Section 1205 (Frontage Elements, Downtown Code), Section 1303 (Transect Lot Standards, WU Code), Section 1306 (Land Use Matrix, WU Code), and Section 1307 (Parking and Loading Standards, WU Code).

<u>Application No. Z-3-25-4-7-8</u>: Map the boundaries for the Middle Housing Overlay District (Z-TA-1-25-Y) located generally within one mile of the Downtown Code boundary.

Staff recommendation: Staff recommends approval of Z-TA-1-25-Y as shown in the recommended text in Exhibit A; and Z-3-25-4-7-8 be approved as shown in Exhibit B.

August 29, 2025 Page 2 of 173

BACKGROUND

This text amendment is a response to House Bill 2721, approved by the Fifty-Sixth Legislature, Second Session and signed into law by the Governor (2024) which created Section 9-462.13, Arizona Revised Statutes to require municipalities to allow Middle Housing in an area within one mile of Downtown, in addition to 20% of any new subdivision citywide. "Middle Housing" is defined by the state statute as "buildings that are compatible in scale, form and character with single-family houses and that contain two or more attached, detached, stacked or clustered homes [and] includes duplexes, triplexes, fourplexes and townhouses."

PURPOSE

The primary intent of the proposed text amendment is to establish the Middle Housing (MH) Overlay District, Section 632, which will allow the development of middle housing on lots zoned for single-family use, and apply it to the area located within one mile of Downtown by January 1, 2026, as required by state law. The secondary purpose is to make other revisions to multiple sections of the Zoning Ordinance necessary to ensure proper compliance with the new state requirements.

DESCRIPTION OF THE PROPOSED TEXT

The proposed text amendment includes three main components: 1) creation of the Middle Housing (MH) Overlay District, Section 632; 2) revisions to various sections of the Zoning Ordinance to ensure compliance with the requirements of Arizona Revised Statutes, Section 9-462.13; and 3) revisions to various sections of the Zoning Ordinance to correctly clarify and cross-reference the zoning ordinance terms and provisions which were updated for compliance with the requirements of the new state law.

1. Creation of the Middle Housing (MH) Overlay District

The Middle Housing (MH) Overlay District is created as Section 632, replacing the obsolete High-Rise H-R1 District which has since been supplanted by the Downtown Code (Chapter 12). The MH Overlay district has two main purposes: to allow up to four primary dwelling units (PDU) on lots which are otherwise permitted a single-family home, and to ensure that the applicable development standards are both consistent with those used for single-family homes in the same district, as well as compliant with the requirements and restrictions of A.R.S. Section 9-462.13.

Opt-In Provision

The MH Overlay District also includes the qualification requirements and procedure for up to 20% of the lots in new residential subdivisions that are at least 10 contiguous acres in size. The Opt-In Provision does not apply to existing residential subdivisions.

August 29, 2025 Page 3 of 173

2. Revisions needed for compliance with A.R.S. 9-462.13.

Revisions to the development standards/development options tables are required to lawfully administer the provisions and prohibitions of A.R.S. 9-462.13. It is the following prohibitions which primarily caused the need for the changes:

B. "The municipality may not do any of the following:

- 1. Discourage the development of middle housing through requirements or actions that individually or cumulatively make impracticable the permitting, siting, or construction of middle housing.
- 2. Restrict middle housing types to less than two floors.
- 3. Restrict middle housing types to a floor area ratio of less than fifty percent.
- Set restrictions, permitting or review processes for middle housing that are more restrictive than those for single-family dwellings within the same zone.
- 5. Require owner occupancy of any structures on the lot.
- 6. Require any structures to comply with a commercial building code or to contain a fire sprinkler.
- 7. Require more than one off-street parking space per unit.

Text Revisions

The following summarizes the text revisions necessary to comply with these prohibitions:

- The "Conventional" development option has been removed, because the
 development standards are not consistent with development in historic
 districts, and current ordinance permissions would allow development of
 middle housing to different and incompatible standards within older/historic
 subdivisions.
- The "Average Lot" development option, which has been prohibited in most districts since 1998 for single-family development, has been removed because it could be used as a way to develop middle housing in areas not required by the state law, or be viewed as not applying consistent development standards to both single-family and middle housing, which is required by the new state law.
- The "Single-Family Infill (SFI)" development option has been removed from each section, and all development standards (and use permit requirements) relocated to Section 608.I.
- The separate, but same-named "Planned Residential Development" options having different standards for single-family and multi-family development

August 29, 2025 Page 4 of 173

have been combined into one development option, with consistent development standards for both multi-family (including middle housing) and single-family development.

- The "Standard" development option has been created, which is essentially a renaming of the existing "Subdivision" development option. The development standards of the Standard option are the same as the Subdivision option, with minor clarifications to allow for consistent application of development standards for both multi-family (including middle housing) and single-family development in the same zone. Most homes in historic districts were constructed using the Subdivision option standards, and the new Standard option ensures that new development, including middle housing, will develop with the same historic zoning regulations.
- Lot coverage has been revised by the MH Overlay to apply the same standard to both single-family and multi-family development when located within an MH district. When combined with the RE-43, RE-35, RE-24, and R1-14 districts, the MH district allows an increase to 50% coverage when all structures on the site are one-story, maximum 20 feet in height.
- Required on-site parking has been reduced to one space per primary dwelling unit, as required by the new state law.
- Individual lot design review for single-family lots (Section 507 Tab A, II.C.8)
 has been revised to be applicable to both single-family homes and middle
 housing (up to four units on a lot) and moved to its own section, Section 507
 Tab A, II.C.9.
- The residential land use matrix (Section 608.D) has been revised to move the
 permissions for Single-Family Infill subdivisions to the table, and to remove
 "duplex" and "triplex" as separate uses (they are both forms of multi-family
 dwelling units).
- Section 1203, Downtown Code land use matrix, has also been updated to remove "duplex" and "triplex" as separate uses (they are both forms of multifamily dwelling units).
- Section 608.G has been revised to clearly explain how developments which
 were approved using development options no longer permitted convert to the
 current ordinance standards. Any existing approved documents using a
 now-archaic development option are still valid.
- Section 702, Off-Street Parking and Loading, has been revised to clarify front yard paving restrictions and apply consistently to both single-family and multifamily development.

August 29, 2025 Page 5 of 173

Definitions

Definitions have been revised for several reasons: to provide clarity in application of the new requirements; to be consistent with definitions used in the state law; and to properly cross-reference other terms which have been revised.

Of special note, "Primary Dwelling Unit (PDU)" was added to clearly differentiate from "Accessory Dwelling Unit (ADU)". This is the manner in which the MH overlay district allows additional PDUs per lot (up to 4), while not increasing the number of permitted subdivided lots.

3. Revisions for clarification and cross-references.

Other revisions were made to correctly reference new and revised terms, as well as relocated/renumbered sections of the Zoning Ordinance, with no substantive revisions:

- Section 608.H, Density Bonus, has been updated to reference the revised development options in each district.
- All Single-Family Infill (SFI) subdivision regulations have been consolidated in Section 608.I.
- Off-Site Manufactured Home Development regulations have been moved to Section 608.J.
- The C-1, C-2, and C-3 districts have been updated to correctly reference standards for Single-Family Infill subdivisions and Off-Site Manufactured Home Developments, in addition to clarifying language regarding existing residential use permissions.
- Section 701.A.3, regarding yard projections, has been updated to reference revised residential development options.
- Section 703, Landscaping, Fences, and Walls, has been updated to apply to lots having up to four dwelling units, rather than just single-family and duplex.
- Section 710, Hillside Development, has been updated to cross-reference revised residential development options.
- Section 1205, Frontage Elements (Downtown Code), has been updated to cross-reference the revised Residential Lot Design Review standards provided in Section 507 Tab A, II.C.9.
- Section 1303, Transect Lot standards (WU Code) has been updated to crossreference the relocated Single-Family Infill regulations moved to Section 608.I.
- Section 1306, Land Use Matrix (WU Code), has been updated to remove the terms "duplex" and "triplex" as well as add the Single-Family Infill (SFI) subdivision option as a permitted use.

August 29, 2025 Page 6 of 173

> Section 1307, Parking and Loading Standards (WU Code), has been updated to correctly cross-reference the relocated Single-Family Infill regulations moved to Section 608.I.

REZONING CASE NO. Z-3-25-4-7-8

A.R.S Section 9-462.13 requires that the area located within one mile of Downtown be provided the entitlement for middle housing no later than January 1, 2026. Rezoning Case No. Z-3-25-4-7-8 has been created to map the boundaries of the MH Overlay district, as described above, to this area with the exceptions as required by the new state law. The applicable exception is for the territory in the vicinity of Phoenix Sky Harbor airport (south of Downtown). The map of the proposed boundary is attached as Exhibit B.

CONCLUSION

This text amendment is quite extensive due to the need to apply development regulations consistently for both single-family housing and middle housing, in addition to making sure that middle housing is permitted where required. All of the revisions proposed are directly related to changes needed to allow middle housing as required by A.R.S. Section 9-462.13.

The proposed text amendment will create a Middle Housing (MH) Overlay District; revise various sections of the Zoning Ordinance to ensure compliance with the requirements of Section 9-462.13, Arizona Revised Statutes; and revise various sections of the Zoning Ordinance to correctly clarify and cross-reference the zoning ordinance terms and provisions which were updated for compliance with the requirements of the new state law.

Staff recommends approval of Z-TA-1-25-Y per the language in Exhibit A, and Z-3-25-4-7-8 be approved as shown in Exhibit B.

Writer

C. DePerro August 29, 2025

Team Leader

Tricia Gomes

Exhibits

- A. Proposed Language—Z-TA-1-25-Y
- B. Proposed Boundary Sketch Map—Z-3-25-4-7-8

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 7 of 173

EXHIBIT A Text Amendment Z-TA-1-25-Y

Proposed Language:

Staff proposed language that may be modified during the public hearing process is as follows:

Amend Chapter 2, Section 202 (Definitions) to add and/or modify definitions as follows:

Building Envelope: The area defined on a lot in which all improvements must be made, including grading and alterations to existing landscaping. These include, but are not limited to house, accessory buildings, pool, patios, driveways, visitor parking, fencing, or walls. The building envelope defines the maximum allowable construction/improvement area on the lot. The building envelope must be identified on all design review submittals. THE AREA OF A LOT EXCLUSIVE OF ALL REQUIRED YARDS.

Building, Main: A building, or buildings, in which is conducted the principal use of the lot on which it is situated. On lots with only single-family residential uses, the primary dwelling unit shall be considered the main building. WHEN ONLY ONE PRIMARY DWELLING UNIT IS PROVIDED ON A LOT, THAT PDU SHALL BE CONSIDERED THE MAIN BUILDING. WHEN MORE THAN ONE PRIMARY DWELLING UNIT IS PROVIDED ON A LOT, EACH BUILDING WHICH CONTAINS A PDU SHALL BE CONSIDERED A MAIN BUILDING.

Building, Open, Porch: An open building used solely for ingress and egress and not for occupancy, at least two sides of which shall be at least 50% open.

August 29, 2025 Page 8 of 173

Dwelling Unit: One or more rooms within a building arranged, designed, or used for residential purposes for one family and containing independent living and sleeping areas, together with independent sanitary (toilet, sink, and bath/shower) and cooking facilities. The presence of cooking facilities conclusively establishes the intent to use for residential purposes.

Accessory Dwelling Unit, ACCESSORY (ADU): A dwelling unit, as defined in this section, subordinate to the primary dwelling unit and situated on the same SINGLE-FAMILY lot. ADUs, where permitted, do not count towards calculations of gross density.

Adaptable Dwelling Units, ADAPTABLE: A dwelling unit designed to be capable of simple conversion into an accessible dwelling unit.

Accessory-Dwelling Unit, Attached ACCESSORY: An ADU which is constructed having a shared wall and attached foundations with the primary dwelling unit. An ADU connected to the primary dwelling unit in any other manner shall not be considered an attached ADU.

Accessory Dwelling Unit, Detached ACCESSORY: An ADU which is constructed with no connection to the primary dwelling unit, except as may be explicitly permitted within the zoning ordinance. A detached ADU may include an integrated garage, carport, or porch. Two ADUs attached to each other, but not to the primary dwelling unit, shall each be considered a detached ADU.

Dwelling Unit, Primary (PDU): FOR A SINGLE-FAMILY LOT, a dwelling unit that is either (1) the only dwelling unit provided on a single-family lot, or (2) the largest dwelling unit provided on a single-family lot when the applicable zoning regulations otherwise allow an accessory dwelling unit-or other types of dwelling units. FOR A MULTI-FAMILY LOT OR DEVELOPMENT, ALL DWELLING UNITS ARE CONSIDERED PRIMARY DWELLING UNITS.

Entry, Front: An arcade, gated arch, covered porch, or COVERED patio, pergola, COURTYARD, or similar architectural enhancement which clearly delineates the location of, or AND path to, the front door A PRIMARY ENTRANCE, AND IS VISIBLE FROM THE FRONT OF THE LOT.

August 29, 2025 Page 9 of 173

Gross Area: The area of a lot or parcel including all dedicated streets, alleys, private accessways roadway and/or alley easements, and canal rights-of-way. Such boundaries shall extended to the center of existing abutting street or alley right-of-way. In the case of an existing partial dedication or easement, the gross area shall not extend beyond what would be the centerline of the full dedication. Further, parcels abutting: 1) a freeway; or 2) a canal right-of-way when the abutting development has complied with the Canal Bank Design Guidelines set forth in Section 507 Tab A, including landscaping of canal bank right-of-way, shall include NO MORE THAN twenty-five feet of such right-of-way within THE gross area.

Guesthouse: See "Accessory Dwelling Unit, ACCESSORY."

Landscape Setback, Average: Repealed.

Multi-Family/Multiple-Family: A lot or parcel where two or more PRIMARY dwelling units are provided., not including permitted accessory dwelling units.

Net Area: The area of a lot or parcel excluding all dedicated streets or alleys ROAD AND CANAL RIGHTS-OF-WAY and roadway or alley easements. but including twenty-five (25) feet of abutting canal right-of-way when the abutting development has complied with the Canal Bank Design Guidelines set forth in Section 507 Tab A, including landscaping of canal bank right-of-way.

PARKING, COVERED: ONE OR MORE PARKING SPACES PROTECTED FROM THE SUN AND WEATHER BY A CARPORT, GARAGE, ROOF OVERHANG, OR OTHER TYPE OF ROOFED STRUCTURE.

Perimeter: The boundaries or boundary of a lot, tract, or parcel of land, PLATTED SUBDIVISION, OR DEVELOPMENT.

August 29, 2025 Page 10 of 173

Planned Residential Development: A DEVELOPMENT OPTION CONSISTING OF <u>a</u> group of dwelling units with common OPEN SPACE areas which are designed as an integrated functional unit A UNIFIED DEVELOPMENT and with the permissibility of potential bonus density and considerable flexibility in the selection of building setbacks, lot areas, DWELLING UNIT TYPES, and street configurationS as long as the public health, safety and welfare are maintained.

PORCH: A STRUCTURE, WITH OR WITHOUT A ROOF, THAT IS ATTACHED TO A BUILDING AND IS AT LEAST 50 PERCENT OPEN ON THE UNATTACHED SIDE(S).

Porch, Open: See "Building, Open Porch".

Primary Entrance: A ground floor entrance to a commercial lobby or suite that is open to the public during business hours, or an-THE MAIN/VISITOR entrance to a SHARED residential courtyard, unit, or lobby OR A PRIMARY DWELLING UNIT. Emergency, service and storage room entrances are not a-primary entranceS.

Projection: Any element or embellishment attached to a structure for environmental protection or architectural enhancement which does not support any portion of the structure. ANY PORTION OF A PERMITTED BUILDING OR STRUCTURE THAT IS ATTACHED TO THE MAIN BUILDING AND EXTENDS FROM THE BUILDING ENVELOPE INTO A REQUIRED YARD OR SETBACK. A PROJECTION IS CONSIDERED "OPEN" WHEN ALSO MEETING THE DEFINITION OF "OPEN BUILDING".

Residential Density: The number of dwelling units divided by the gross acres of the legally described development area.

Setback, Landscaped, Average: The averaging of a required setback to encourage variation along a single continuous plane of a building, perimeter wall or street frontage.

August 29, 2025 Page 11 of 173

SETBACK, GARAGE DOOR / CARPORT ENTRY: THE REQUIRED MINIMUM DISTANCE BETWEEN THE STREET AND COVERED PARKING. THIS DISTANCE SHALL BE MEASURED FROM THE PROPERTY LINE TO THE FACE OF THE GARAGE DOOR OR CARPORT, UNLESS THE PROPERTY HAS AN EASEMENT DEDICATED ON THE FRONT OF THE PROPERTY FOR A SIDEWALK OR TRAIL, IN WHICH CASE THE DISTANCE SHALL BE MEASURED FROM THE LOT SIDE OF THE EASEMENT TO THE FACE OF THE GARAGE DOOR OR CARPORT.

SETBACK, LANDSCAPE: A SETBACK WHICH IS RESTRICTED TO THE FOLLOWING IMPROVEMENTS: LIVE PLANT MATERIALS SUCH AS TREES, SHRUBS, AND GROUNDCOVERS WITH AN AUTOMATIC IRRIGATION SYSTEM; SIDEWALKS; REQUIRED DRAINAGE FACILITIES; ENTRY MONUMENTS; SIGNS; PUBLIC ART INSTALLATIONS, AND WALLS AS OTHERWISE PERMITTED BY THIS ORDINANCE. PARKING AND MANEUVERING IS NOT PERMITTED WITHIN A LANDSCAPE SETBACK EXCEPT FOR APPROVED STREET AND DRIVEWAY CROSSINGS.

Shade Structure: A structure, such as a pergola, arbor, or open-COVERED porch, which is designed and used for protection OF OUTDOOR LIVING AREAS from the sun and which contains at least HAS A MINIMUM OF one (1) side which is at least fifty-50 percent (50%) open.

STREET FRONTAGE REQUIREMENT: THE TYPE OR CLASS OF STREET ON WHICH THE FRONT PROPERTY LINE OF A LOT MUST ABUT.

STREET, PERIMETER: ANY PUBLIC STREET OR PRIVATE ACCESSWAY WHICH FORMS THE EXTERIOR BOUNDARY OF A SUBDIVISION OR DEVELOPMENT. THIS DEFINITION DOES NOT INCLUDE PUBLIC ALLEY RIGHT-OF-WAY OR CANAL RIGHT-OF-WAY, UNLESS THE RIGHT-OF-WAY IS ALSO A NAMED STREET USED FOR THE LEGAL ADDRESSES OF ABUTTING PROPERTIES.

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 12 of 173

Subdivision: The division of a lot, tract, or parcel of land into three or more lots, tracts or parcels PARCELS of which the original land area is greater than two and one half acres, Land-for which a subdivision plat has been APPROVED AND recorded IN ACCORDANCE WITH THE PROVISIONS OF THE CITY CODE SECTION 32-32, OR BY MARICOPA COUNTY IF RECORDED PRIOR TO ANNEXATION., and for any condominium, community apartment, townhouse or similar project.

Subdivision, Average Lot: A subdivision in which residential density is controlled by the number of dwelling units LOTS in a development rather than by minimum lot size. SEE "PLANNED RESIDENTIAL DEVELOPMENT".

Subdivision, Conventional: A subdivision in which residential density is controlled by the density provisions within each zoning district, and by development standards related to lot width, the management of stormwater, the provision of infrastructure requirements and constraints related to the property topography or configuration. SEE "SUBDIVISION, STANDARD".

Subdivision, Planned Residential Development: See "Planned Residential Development".

SUBDIVISION, Single-Family Infill (SFI)-Development: A type of single-family development consisting of townhouses and a limited number of detached dwelling units. Perimeter standards are defined and potential bonus density and design flexibility allow for quality individual property ownership within a larger development. A SUBDIVISION APPROVED AND DEVELOPED IN ACCORDANCE WITH THE SINGLE-FAMILY INFILL SUBDIVISION DEVELOPMENT STANDARDS OF SECTION 608.I.

SUBDIVISION, STANDARD: A SUBDIVISION DEVELOPED IN COMPLIANCE WITH THE DEVELOPMENT REGULATIONS OF THE STANDARD OPTION OF A RESIDENTIAL ZONING DISTRICT. A SUBDIVISION PLAT SUBTITLED "A CONVENTIONAL SUBDIVISION", "SUBDIVISION OPTION", OR HAVING NO SUBTITLE SHALL ALSO BE CONSIDERED A STANDARD SUBDIVISION.

Subdivision, Zero Lot Line: A subdivision in which the main building may be constructed without a side yard.

August 29, 2025 Page 13 of 173

TRACT: A PARCEL OF LAND DESIGNATED WITHIN A SUBDIVISION WHICH IS NOT CONSIDERED A LOT AND IS NOT REQUIRED TO MEET MINIMUM LOT DIMENSIONS. A TRACT MAY BE DEVELOPED ONLY WITH SUBDIVISION AMENITIES, DRAINAGE FACILITIES, UTILITIES, LANDSCAPE, OR OTHER IMPROVEMENTS AS SPECIFICALLY PERMITTED FOR THE TRACT IN THE DEDICATION STATEMENT FOR THE SUBDIVISION PLAT.

Yard: A space on any lot, unoccupied by a structure and unobstructed from the ground upward except as otherwise provided herein, and measured as the minimum horizontal distance from a building or structure, excluding carports, porches and other permitted projects-PROJECTIONS, to the property line opposite such building line in the side or rear yards, or to the street right-of-way or easement in the front yard; provided, however, that where a future width line is established by the provisions of this ordinance for any street bounding the lot, then such measurement shall be taken from the line of the building to such future width line.

Amend Chapter 5, Section 507 Tab A (Guidelines for Design Review) to read as follows:

Section 507 Tab A. Guidelines for Design Review

II. CITY-WIDE DESIGN REVIEW GUIDELINES. The design review guidelines indicated with the markers (R), (R*), (P), (T), and (C) shall be applied and enforced in the same manner as indicated in Section 507. Items not indicated with an (R), (R*), (P), (T), and (C) shall be treated as (R).

C. Subdivision and Single-Family Detached RESIDENTIAL LOT Design Review.

August 29, 2025 Page 14 of 173

8. Single-Family Detached SUBDIVISION DIVERSITY Design Review. New single-family detached dwelling units, lots having a single duplex or triplex, manufactured homes, and modular homes shall be subject to design review-SUBDIVISIONS HAVING AT LEAST TEN PERCENT OF LOTS EQUAL TO OR LESS THAN 65 FEET IN WIDTH, AND HAVING DETACHED SINGLE-FAMILY DWELLING UNITS; AND MANUFACTURED AND/OR MODULAR HOME SUBDIVISIONS REGARDLESS OF LOT WIDTH, ARE SUBJECT TO DESIGN REVIEW DIVERSITY GUIDELINES 8.1 THROUGH 8.4, as follows (R):

- (a) Single-family detached developments where ten percent or more of the lots are equal to or less than 65 feet in width shall incorporate Design Guidelines Sections 8.1 through 8.4.
- (b) Individual single-family detached dwelling units, not subject to Subdivision Design Guidelines 8.1 through 8.4, on a lot or parcel of 65 feet in width or less, shall incorporate Design Guidelines Section 8.5. This requirement includes lots with a single duplex or triplex when not located in a subdivision subject to Section 507 Tab A.II.C.8(a).
- (c) Dwelling units on lots zoned or designated HP are exempt from the provisions of Design Guidelines Section 8.5, so long as the plans are reviewed and approved through historic preservation prior to issuance of any building permits.
- (d) Individual manufactured and modular homes, regardless of lot width, shall incorporate Design Guidelines Section 8.5.
- (e) Manufactured and modular home subdivisions, regardless of lot width, shall incorporate Design Guidelines Sections 8.1 through 8.4.

August 29, 2025 Page 15 of 173

The design guidelines in each of the following sections (subdivision design, housing design, garage treatment, and community safety) must be satisfied in one of two ways. The first method, called the standard approach, is to meet each of the design guidelines as written in the following tables. The second method, called the alternative approach, allows consideration of creative design solutions on a section by section basis, as long as the intent of that section has been met. Either method may be used for all or some of the following sections. For example, an applicant may choose the standard approach for the subdivision design and garage treatment sections and the alternative approach for the housing design and community safety sections or the standard approach may be used for all four sections. Whether the alternative approach is acceptable will be determined by the design advisor of the Planning and Development Department.

Diversity: The goal of diversity is to provide a variety of subdivision and housing designs which lend visual interest and distinctive character and identity to the community. This goal is addressed in two subsections, subdivision design and housing design.

8.1. **Subdivision Design.** Provide subdivision designs which address the goal of diversity by incorporating these or substantially equivalent design characteristics: 1) Vary the building's relationship to the street, 2) Vary the driveway orientation or location, 3) Vary the relationship between buildings, and 4) Vary street orientation.

Design Guidelines: All are required (R*), unless otherwise noted.

8.5. Individual Unit Design Standards. The goal of these individual unit design standards is to ensure a minimum level of design quality for detached single-family dwelling units, duplexes, manufactured homes, and modular homes. For information on relief from requirements (R) and (R*), and presumptions (P), refer to Section 507.C of the Zoning Ordinance.

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 16 of 173

- (a) Each dwelling unit shall have at least one covered parking space located in a garage or under a carport.
 (R)
- (b) The front yard, excluding areas approved for vehicle access, should be landscaped with the following elements: (P)
 - (1) A minimum of one, two inch caliper or greater, drought resistant, accent tree.
 - (2) A minimum of five, five gallon or greater, drought resistant shrubs.
 - (3) Dustproofed with ground cover, turf, rock, decomposed granite, or equivalent material as approved by the Planning and Development Department.
 - (4) An irrigation system.

Rationale: Landscaping contributes to an attractive environment, provides shade, and contributes to neighborhood identity.

(c) Required covered parking shall not be located more than ten feet closer to the front property line than the front entry. (R*)

Rationale: When parking structures are concentrated in front of a dwelling unit, the building loses its residential character and compatibility with surrounding residences is negatively impacted.

(d) Walls, fences, and enclosure materials shall not include chain link fencing with, or without, plastic or metal slats, sheeting, nondecorative corrugated metal and fencing made or topped with razor, concertina, or barbed wire.

(R*)

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 17 of 173

(e) Development of lots with more than one dwelling unit should provide a single, common access drive to parking areas. (P)

Rationale: Shared access and common parking minimize unnecessary curb cuts and breaks in the streetscape. Common parking areas also reduce the paved area of a site.

- (f) All dwelling units should provide the following architectural design elements: (P)
 - (1) Consistent detailing and design for each side of the building.
 - (2) Window and door trim as well as accent detailing should be incorporated and vary from the primary color and materials of the building.
 - (3) Garage doors should be provided with windows, raised or recessed panels, architectural trim, or single doors.
 - (4) Materials such as untextured concrete, unfinished block, steel panels, and shiny or highly reflective detailing should not be used as a predominant exterior material.

Rationale: High quality design promotes neighborhood pride and visual interest in residential architecture.

(g) Garage doors facing the public street and attached to the primary dwelling unit should not exceed 50 percent of the building width. (P)

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 18 of 173

Rationale: Garage doors should not be the aesthetic focus of a house; they should complement and appear subordinate to the main structure. This is particularly important if a duplex or triplex is constructed.

(h) A front entry shall be provided that faces and is visible from the street, and includes an architectural feature to call attention to it (such as a porch, entry patio, stoop, awning/canopy, courtyard, or archway). For lots having more than one dwelling unit, a minimum of one unit shall comply with this requirement. (R*)

Rationale: Emphasizing the entrance and front facade adds to the residential character of new dwelling units and provides eyes on the street.

- (i) Manufactured homes shall provide the following additional architectural design elements:
 - (1) Materials such as wood, hardboard, brick veneer, hardiplank, stucco, or horizontal vinyl siding shall be used as a predominant exterior material. (P)
 - (2) The exposed roof pitch shall be at a minimum of 3/12 for units 28 feet or less in width and be covered with shingles, tile or metal, excluding aluminum. (R*)
 - (3) A minimum 50-square-foot recessed entry or covered porch shall be provided along the front entry of the building. (R*)
 - (4) Permanent access to the porch or recessed entry should be constructed with materials and colors that are compatible with the dwelling unit. (P)

August 29, 2025 Page 19 of 173

- (5) A masonry stem wall shall be provided under the dwelling unit with no more than seven inches of exposed foundation measured from highest finished grade. (R*)
- (6) The exposed masonry stem wall color should be compatible to the dwelling unit. (P)

Rationale: High quality design promotes neighborhood pride and visual interest in residential architecture for manufactured homes.

- 9. **RESIDENTIAL LOT DESIGN REVIEW.** THE FOLLOWING DESIGN REVIEW REGULATIONS APPLY TO ALL RESIDENTIAL LOTS THAT ARE 65 FEET OR LESS IN WIDTH AND HAVE FOUR OR FEWER PRIMARY DWELLING UNITS ON A LOT, AND ANY LOT HAVING A MANUFACTURED OR MODULAR HOME, WITH THE FOLLOWING EXCEPTIONS:
 - <u>a.</u> THE LOT IS WITHIN AN APPROVED SINGLE-FAMILY INFILL (SFI) SUBDIVISION;
 - <u>b.</u> THE LOT IS SUBJECT TO SECTION II.C.8 (SUBDIVISION DIVERSITY DESIGN REVIEW); OR
 - C. THE LOT IS ZONED OR DESIGNATED HP, AND THE CONSTRUCTION PLANS ARE REVIEWED AND APPROVED IN ACCORDANCE WITH CHAPTER 8, HISTORIC PRESERVATION, PRIOR TO ISSUANCE OF ANY BUILDING PERMITS.
 - 9.1 ALL DWELLING UNITS ON A LOT SHALL EXHIBIT A DESIGN SCALE, FORM, AND CHARACTER OF A SINGLE-FAMILY HOME. (P)

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 20 of 173

RATIONALE: NEW CONSTRUCTION SHOULD RESPECT
THE DESIGN AND CHARACTER OF EXISTING
ESTABLISHED NEIGHBORHOODS, REGARDLESS OF THE
NUMBER OF UNITS PROVIDED ON A LOT. BUILDING
MATERIALS SHOULD MATCH OR COMPLEMENT THE
MATERIALS USED ON EXISTING HOMES IN THE VICINITY.

- 9.2 THE FRONT YARD, EXCLUDING AREAS APPROVED FOR VEHICLE ACCESS, SHOULD BE LANDSCAPED WITH THE FOLLOWING ELEMENTS: (P)
 - (a) A MINIMUM OF ONE, TWO INCH CALIPER OR GREATER, DROUGHT RESISTANT, ACCENT TREE.
 - (b) A MINIMUM OF FIVE, FIVE GALLON OR GREATER, DROUGHT RESISTANT SHRUBS.
 - (c) DUSTPROOFED WITH GROUND COVER, TURF, ROCK, DECOMPOSED GRANITE, OR EQUIVALENT MATERIAL AS APPROVED BY THE PLANNING AND DEVELOPMENT DEPARTMENT.
 - (d) AN IRRIGATION SYSTEM.

RATIONALE: LANDSCAPING CONTRIBUTES TO AN ATTRACTIVE ENVIRONMENT, PROVIDES SHADE, AND CONTRIBUTES TO NEIGHBORHOOD IDENTITY.

- 9.3 A MINIMUM OF ONE PRIMARY ENTRANCE SHALL BE PROVIDED WHICH FACES AND IS VISIBLE FROM THE STREET. (R*)
- 9.4 FOR TWO-STORY BUILDINGS, WINDOWS, BALCONIES (WITH DOORS FOR ACCESS), OR DECKS SHALL BE PROVIDED ON THE FRONT FAÇADE FOR A MINIMUM OF ONE-QUARTER OF THE BUILDING WIDTH. (R*)
- 9.5 EACH DWELLING UNIT SHALL HAVE AT LEAST ONE COVERED PARKING SPACE. (R*)

August 29, 2025 Page 21 of 173

- 9.6 FRONT-FACING GARAGE DOORS AND CARPORTS SHALL BE NO WIDER THAN 50 PERCENT OF WIDTH OF THE BUILDING ENVELOPE AS MEASURED AT THE MINIMUM REQUIRED FRONT SETBACK. (R*)
- 9.7 GARAGES AND CARPORTS SHALL NOT BE LOCATED MORE THAN TEN FEET CLOSER TO THE FRONT PROPERTY LINE THAN THE CLOSEST PRIMARY ENTRANCE. (R*)
- 9.8 WALLS, FENCES, AND ENCLOSURE MATERIALS SHALL NOT INCLUDE CHAIN LINK FENCING WITH, OR WITHOUT, PLASTIC OR METAL SLATS, SHEETING, NONDECORATIVE CORRUGATED METAL AND FENCING MADE OR TOPPED WITH RAZOR, CONCERTINA, OR BARBED WIRE. (R*)
- 9.9 MANUFACTURED HOMES SHALL PROVIDE THE FOLLOWING ADDITIONAL ARCHITECTURAL DESIGN ELEMENTS:
 - (a) MATERIALS SUCH AS WOOD, HARDBOARD, BRICK VENEER, HARDIPLANK, STUCCO, OR HORIZONTAL VINYL SIDING SHALL BE USED AS A PREDOMINANT EXTERIOR MATERIAL. (P)
 - (b) THE EXPOSED ROOF PITCH SHALL BE AT A
 MINIMUM OF 3/12 FOR UNITS 28 FEET OR LESS IN
 WIDTH AND BE COVERED WITH SHINGLES, TILE
 OR METAL, EXCLUDING ALUMINUM. (R*)
 - (c) A MINIMUM 50 SQUARE FOOT FRONT ENTRY SHALL BE PROVIDED ALONG THE STREET SIDE OF THE BUILDING. (R*)

August 29, 2025 Page 22 of 173

- (d) PERMANENT ACCESS TO THE FRONT ENTRY
 SHOULD BE CONSTRUCTED WITH MATERIALS AND
 COLORS THAT ARE COMPATIBLE WITH THE
 DWELLING UNIT. (P)
- (e) A MASONRY STEM WALL SHALL BE PROVIDED UNDER THE DWELLING UNIT WITH NO MORE THAN SEVEN INCHES OF EXPOSED FOUNDATION MEASURED FROM HIGHEST FINISHED GRADE. (R*)
- (f) THE EXPOSED MASONRY STEM WALL COLOR SHOULD BE COMPATIBLE TO THE DWELLING UNIT. (P)

Amend Chapter 6, Section 608 (Residential Districts) to read as follows:

Section 608. Residential Districts.

A. Purpose. Residential districts are established in recognition of a need to provide areas of the City devoted primarily to living functions. In order to preserve these areas from the distractions and adverse impacts which can result from immediate association with nonresidential uses, these districts are restricted to residential, limited nonresidential uses, and appropriate accessory uses. These regulations are designed to promote the creation and maintenance of areas in which individuals or families may pursue residential activities with reasonable access to open space, and streets or roads, in a setting which is not negatively impacted by adjacent uses. Limited nonresidential uses may have conditions placed upon them to limit impact to adjacent residential uses and in some cases require a public hearing through a use permit or special permit process to mitigate any negative impacts to surrounding residential uses.

August 29, 2025 Page 23 of 173

The standards contained in this section and Sections 609 through 619 and 635 are designed to establish the character of new residential development and also to preserve the quality of residential uses during their lifetime. When applied to new development, these standards are designed to be used in conjunction with the development and improvement standards as contained in the Phoenix Subdivision Ordinance, Chapter 32 of the City Code.

This section applies to the residential districts in Sections 609 through 619, in addition to Section 635 (Planned Area Development) when specified.

B. Applicability. THIS SECTION APPLIES TO RESIDENTIAL DISTRICTS RE-35, R1-18, R1-10, R1-8, R1-6, R-2, R-3, R-3A, R-4, R-5, AND R-4A (SECTIONS 609 THROUGH 619), AND WHERE SPECIFIED IN THE REGULATIONS FOR OTHER ZONING DISTRICTS.

of Development Options. The development of any parcel of land shall be in accordance with the standards contained in any one development option as contained in Sections 609 through 619. Development of a single lot or a parcel not being further subdivided and located in the RE-35 and R1-18 zoning districts (Sections 609 and 610) shall be in accordance with the requirements for the standard subdivision development option (a), as contained in Sections 609 and 610. For a single lot or parcel not part of a subdivision platted prior to May 1, 1998, not being further subdivided, and located in the R1-10 through R-4A zoning districts (Sections 611 through 619), development shall be in accordance with the requirements of the conventional subdivision option as contained in Sections 611 through 619.

All subsequent development shall be in accordance with the initially selected development option unless a use permit is obtained. Building on any lot which was subdivided or developed prior to the adoption of this chapter shall be done in accordance with the standards under which the initial subdivision or development occurred.

For purposes of conversion to this ordinance, property subdivided prior to May 1, 1998, shall be considered as follows:

1. Residential development with a site plan approved in accordance with Section 507 shall be considered under the planned residential development option.

August 29, 2025 Page 24 of 173

2. Residential development with an approved subdivision setback exhibit shall be considered under the average lot development option if located in the RE-35 through R-5 zoning districts (Sections 609 through 618).

3. Any other prior residential development shall be considered under the development option selected when the property was subdivided.

A use permit shall not be required for new development on previously subdivided property or property on which there is an approved site plan if the new development is in conformance with the provisions of this ordinance.

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 25 of 173

D. Residential Districts Land Use Matrix

Table 608.D. Residential Districts Land Use Matrix

					SECTIC	SECTION AND ZONING DISTRICT	SUING DIS	STRICT				
LAND USE CATEGORIES	609	610	611	612	613	614	615	616	617	618	619	635
	RE-35	R1-18	R1-10	R1-8	R1-6	R-2	R-3	R-3A	R-4	R-5	R-4A	PAD
Single-Family Detached	pc1	pc1	pc1	pc1	pc1	pc1	pc1	pc1	pc1	pc1	pc1	pc1
(ac) Accessory Dwelling Unit (ADU)	pc2	pc2	pc2	pc2	pc2	bc2	pc2	bc2	pc2	pc2	pc2	pc2
(ac) Guestroom(s)	pc3	65d	62d	62d	pc3	62d	pc3	62d	pc3	pc3	62d	pc3
Duplex	du	du	bc4	bod	pc4	pc/	pc4	pc4	pc4	pc4	pc/	pc4
Triplex	du	du	du	du	du	god	god	god	god	god	god	god
Single-Family Attached	pc 6 4	<u>5</u> 90d	<u> 5</u> 90d	<u> ₽</u> 90d	pc 6 4	<u> 5</u> 9⊃d	pc 6 4	<u></u> 7 9⊃d	pc 6 4	pc <u>64</u>	pc 6 4	pc <u>64</u>
SINGLE-FAMILY INFILL (SFI) SUBDIVISION	du	d u	du	d u	du	<u>30d</u>	<u>pc5</u> up5	<u>5</u> 2dn	<u>5c2</u> nb2	<u>5c2</u> nb2	9dn 9>d	du
Multi-Family	du	du	du zod	du zod	du zod	2od	bc7	2od	bc7	pc7	Lod	pc7
(ac) Residential Convenience Market	du	du	du	du	du	du	du	8od	82d	god	bc8	pc8
Off-Site Manufactured Home Developments	du	du	du	du	du	38dn	1p35	38dn	38dn	35dn	38dn	np
***	* * *	***	***	***	**	***	***	***	**	* * *	***	***

*(ac) = accessory use permitted only with primary use listed immediately prior in the table.

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 26 of 173

E. Land Use Conditions.

- 1. Single-Family Detached Dwelling Unit. Each single-family lot is permitted one single-family detached primary dwelling unit and no additional dwelling units, unless otherwise permitted elsewhere in this section.
- 2. Accessory Dwelling Unit (ADU).
 - a. When a lot has no more than one single-family detached primary dwelling, two ADUs are permitted in addition to the primary dwelling unit. A third ADU may be permitted when at least one of the ADUs qualifies as affordable housing and the net lot size is a minimum 43,560 square feet. However, lots having a duplex or triplex, single-family attached units or any multi-family dwelling units are not permitted any ADUs.
 - b. An ADU is subject to the development regulations of Section 706.A.
- 3. *Guestrooms*. Each single-family dwelling unit may contain no more than two guestrooms.

4. Duplex.

- a. Single-Family Lots. One duplex is permitted per lot when allowed by the underlying zoning district and development option. The lot must be of the minimum size required by the applicable density to permit two dwelling units.
- b. Multi-Family Lots. Duplexes are permitted when allowed by the underlying zoning district and development option. The lot must be of the minimum size required by the applicable density to permit the number of dwelling units proposed.

August 29, 2025 Page 27 of 173

4. SINGLE-FAMILY ATTACHED DWELLING UNIT. ONE SINGLE-FAMILY ATTACHED DWELLING UNIT IS PERMITTED PER SINGLE-FAMILY LOT WHEN THE APPLICABLE DEVELOPMENT OPTION HAS NO REQUIREMENTS FOR INTERIOR SIDE YARD SETBACKS.

5. Triplex.

- a. Single-Family Lots. One triplex is permitted per lot when allowed by the underlying zoning district and development option. The lot must be of the minimum size required by the applicable density to permit three dwelling units.
- b. Multi-Family Lots. Triplexes are permitted when allowed by the underlying zoning district and development option. The lot must be of the minimum size required by the applicable density to permit the number of dwelling units proposed.
- 5. SINGLE-FAMILY INFILL (SFI) SUBDIVISION. SFI SUBDIVISIONS PER THE PROVISIONS SET FORTH IN SECTION 608.I ARE PERMITTED WHEN LOCATED WITHIN THE INFILL DEVELOPMENT DISTRICT, AND BY USE PERMIT WHEN LOCATED IN THE APPLICABLE AREAS DEPICTED IN FIGURE 608.I.1.
- 6. Single-Family Attached Dwelling Unit. One single-family attached dwelling unit is permitted per single-family lot when allowed by the underlying zoning district and development option.

 SINGLE-FAMILY INFILL (SFI) SUBDIVISION—R-4A ONLY. SFI SUBDIVISIONS PER THE PROVISIONS SET FORTH IN SECTION 608.I ARE PERMITTED WHEN LOCATED WITHIN THE INFILL DEVELOPMENT DISTRICT, AND BY USE PERMIT WHEN LOCATED IN THE APPLICABLE AREAS DEPICTED IN FIGURE 608.I.1. EXCEPT FOR THE PERMITTED DENSITY, THE DEVELOPMENT STANDARDS SHALL BE THE SAME AS FOR THE R-4 PLANNED RESIDENTIAL DEVELOPMENT OPTION, AS MODIFIED BY SECTION 608.I.
- 7. Multi-Family Dwelling Units. Multi-family dwelling units are permitted when allowed by the underlying zoning district and development option EXCEPT WHEN THE DEVELOPMENT HAS BEEN PLATTED AS A SINGLE-FAMILY SUBDIVISION.

August 29, 2025 Page 28 of 173

35. Off-site manufactured home developments are permitted with use permit approval per Section 307, and subject to the development regulations provided in-Section 608.F.7 608.J.

F. Special GENERAL DEVELOPMENT Regulations.


- No structure may be built on a lot which does not front on a street which is in accordance with the adopted street classification map AND THE PROVISIONS OF SECTION 714, FUTURE WIDTH LINES, unless exempted by this section.
- 2. In any district where a half street not less than one-half of that width prescribed for that street by the street classification map, and amendments thereto, has been dedicated, any lots facing or siding on such half street from which side the required width of dedication has been made shall be deemed to have frontage on a street.
- 3. No permit shall be issued for buildings on a lot fronting on a half street of less than that prescribed by the street classification map for an arterial or collector street or 25 feet for all other streets-except for single-family attached development individual dwelling units UNLESS THE LOT IS PART OF A PLATTED SUBDIVISION WHICH WAS APPROVED WITH MODIFIED STREET STANDARDS.
 - a. For development utilizing an average lot or PRD development option or for development built under a planned area development district, a minimum of 16.58-foot half-street right-of-way may be provided when all of the following conditions are met:
 - (1) The street is not designated as a collector or arterial street.
 - (2) There are no restrictions to public access to the street.

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 29 of 173

- (3) Pavement width shall be 33.16 feet from back of curb to back of curb.
- (4) Pavement thickness and design shall be in accordance with Maricopa Association of Governments' standards.
- (5) All terminations shall contain a 40-foot-radius right-of-way.
- (6) The street has been constructed prior to March 19, 1986.
- 4. There shall be no outdoor storage of personal property visible beyond the boundaries of the property within any front or side yard.
- 5. No accessory use shall include outdoor display or storage of any of the following listed items when such items are visible or emit odor, dust, gas, noise, vibration, smoke, heat or glare beyond any boundary of the lot on which such items are displayed or stored:
 - a. Any building or landscaping materials.
 - b. Any machinery, parts, scrap, or appliances.
 - c. Vehicles which are unlicensed, inoperable, or registered to or owned by persons not residing on or the guest of persons residing on the premises.
 - d. Any other chattel used for or intended for a commercial purpose or ultimate use on other than the subject premises.
- 6. Single-Family Infill (SFI). Single-family infill development regulations may be applied in zoning districts where the SFI development option is offered, but only when the development falls within the infill development district identified in the general plan, or with use permit approval within the following areas located outside of the infill development district:

Figure 608.F.6. Single-Family Infill Development Areas

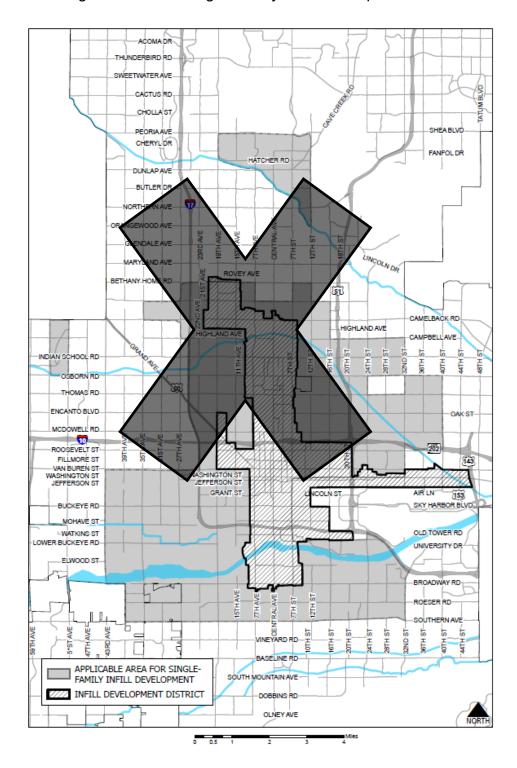

August 29, 2025 Page 31 of 173

- a. The SFI development option does not eliminate any redevelopment area, special planning district or overlays. Where conflicts occur between the requirements of the SFI development option and redevelopment areas, overlay zoning districts, special planning districts, and specific plans, the requirements of the overlay zoning districts, special planning districts, redevelopment areas or specific plans shall apply.
- b. Historic preservation designated properties or properties in historic preservation districts cannot use the SFI development option.
- c. Dwelling Units. The SFI development option is intended primarily for single-family attached dwelling units; however, up to 20 percent of the units in a development may be single-family detached dwelling units to allow for variety and efficiency of design.
 - (1) Any provided detached dwelling units shall comply with the same development regulations applicable to that SFI development.
- d. Design Requirements.
 - (1) Individual units fronting on street rights-of-way shall provide an entryway that is either elevated, depressed or includes a feature such as a low wall to accentuate the primary entrance.
 - (2) Required covered parking spaces shall not front on perimeter street rights-of-way.
 - (3) Individual unit rear yards shall not abut perimeter street ROW or an adjacent perimeter street landscape area.
 - (4) Attached dwelling units constructed in a row shall not exceed a total length of 200 feet without having a minimum 20-foot-wide open area.
- e. Perimeter Landscape Setbacks and Requirements.

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 32 of 173

- (1) Residences that front on arterial, collector, or local street rights-of-way shall provide a minimum ten-foot-wide landscape tract or community-maintained landscaping abutting the street, except when within 2,000 feet of a light rail station.
- (2) Residences that side on arterial, collector, or local street rights-of-way shall provide a minimum 15-foot-wide landscape tract or community-maintained landscaping abutting the street.
- (3) Perimeter of the development not abutting rights-of-way and adjacent to a single-family residential district or historic preservation designated property must provide a minimum tenfoot landscape setback. Walls/fences up to six feet high within private rear yards may be provided within the perimeter setback so long as the required landscape is still provided.
- (4) Trees shall be provided in required landscape setbacks at a minimum rate of 20 feet on center or equivalent groupings, as approved by the PDD landscape architect, subject to the following:
 - (a) Fifty percent of the required trees shall be minimum one-and-one-half-inch caliper at the time of installation.
 - (b) Twenty-five percent of the required trees shall be minimum two-inch caliper or multi-trunked trees at the time of installation.
 - (c) Twenty-five percent of the required trees shall be minimum three-inch caliper or multi-trunked trees at the time of installation.
- (5) A minimum of five five-gallon shrubs per tree shall be provided.
- f. Open Space Regulations. The only walls/fences allowed within required common area open space are required pool security fences and other necessary security fences, as approved by PDD.

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 33 of 173

g. Parking Requirements. Section 702 applies to SFI development, except where specifically modified by this section.

- (1) Within the Infill Development District: one parking space per dwelling unit must be provided that is covered or located within a garage.
- (2) Within the applicable SFI area that is not located within the infill development district: two parking spaces per dwelling unit must be provided that are covered or located within a garage.
- (3) The required spaces for each dwelling unit must be located on the same lot as the unit for which they are provided.
- (4) A minimum 0.25 additional unreserved guest parking space per dwelling unit must be provided within any SFI development.
- h. Alley Access and Maneuvering.
 - (1) All maneuvering for on-site parking must be located on private property and not in public ROW.
 - (2) Access to the site from a fully dedicated and paved alley is permitted within the infill development district.
 - (3) Access to the site from a fully dedicated and paved alley is permitted applicable area outside of the infill development district if all three conditions are met, as follows:
 - (a) The site is not across the alley from either a single-family or historic preservation zoning district;
 - (b) Alley access is specifically approved as part of the use permit hearing; and
 - (c) All necessary technical appeals have been approved.

August 29, 2025 Page 34 of 173

- i. Maximum 40-inch fence height allowed in the required setbacks along perimeter street rights-of-way.
- j. Signage is subject to the regulations of Section 705, Table D-1, Single-Family Residential.
- 7. Off-Site Manufactured Home Developments. Off-site manufactured home development is subject to use permit approval in the C-1, C-2, and C-3 districts, in addition to zoning districts indicated in Section 608.D; and subject to the following additional development regulations:
 - a. The provisions of Section 703.B do not apply to off-site manufactured home developments.
 - b. These regulations apply to development of a single lot or parcel, not to be further subdivided.
 - c. Placement for each off-site manufactured home shall be provided as follows:
 - (1) There shall be a minimum of 20 feet between off-site manufactured homes and ten feet between awnings and canopies. All annexes or structural additions shall be considered part of the off-site manufactured home.
 - (2) There shall be at least 40 feet between off-site manufactured homes on opposite sides of a private accessway.
 - (3) No off-site manufactured home, annex or structural addition shall be closer than eight feet to any private accessway or private drive.
 - d. Each off-site manufactured home space shall have private outdoor living space of at least 150 square feet. The dimension of this space shall be at least 15 feet in width.

August 29, 2025 Page 35 of 173

e. At each occupied off-site manufactured home space, there shall be an enclosed storage locker for yard tools and other bulky items convenient to the space with a storage capacity of at least 150 cubic feet.

- f. All areas not covered by structures or paved surfaces shall be landscaped and maintained in accordance with the approved development review documents required under Section 507.
- g. Screening the perimeter of an off-site manufactured home development by a wall or other approved material may be required as a condition of use permit approval.
- h. There shall be a network of pedestrian walkways connecting off-site manufactured home spaces with each other and with development facilities and amenities.
- i. If storage yards are provided, there shall be a screened storage yard or yards for boats, recreational vehicles, etc. Such storage yards shall have a minimum of 60 square feet of storage space for each off-site manufactured home space in the development and shall be located so as to not detract from surrounding properties. All boats and recreational vehicles shall be parked in the storage yard.
- j. Each off-site manufactured home shall (1) be affixed permanently to the ground or (2) have skirting around its perimeter to screen its wheels and undercarriage.
- k. All utilities and the wires of any central television or radio antenna system shall be underground.
- H. Not more than 15 percent of the spaces in any one off-site manufactured home development shall be developed or used for recreational vehicles.
- m. Development of off-site manufactured home communities shall be under the planned residential development option applicable in the underlying zoning district.

August 29, 2025 Page 36 of 173

- n. Private drives may be used for access to each off-site manufactured home.
- o. There shall be a minimum of five percent of the total area of the offsite manufactured home development dedicated or reserved as usable common open space land. Common open space lands shall be clearly designated on the plan as to the character of use and development but shall not include:
 - (1) Areas reserved for the exclusive use or benefit of an individual tenant or owner; nor
 - (2) Dedicated streets, alleys, and other public rights-of-way; nor
 - (3) Vehicular drives, parking, loading, and storage areas; nor
 - (4) Required setback areas at exterior boundaries of the site; nor
 - (5) Golf courses.

Adequate guarantees must be provided to ensure permanent retention of open space land area resulting from the application of these regulations, either by private reservation for the use of the residents within the development or by dedication to the public, or a combination thereof.

G. Reserved.

DEVELOPMENT OPTIONS. EACH RESIDENTIAL ZONING DISTRICT (RE-35, R1-18, R1-10, R1-8, R1-6, R-2, R-3, R-3A, R-4, R-5, AND R-4A) PROVIDES DEVELOPMENT STANDARDS SPECIFIC TO THAT ZONING DISTRICT. ADDITIONALLY, DIFFERENT SETS OF DEVELOPMENT STANDARDS ("DEVELOPMENT OPTIONS") ARE PROVIDED WITHIN CERTAIN ZONING DISTRICTS.

1. GENERAL REQUIREMENTS.

August 29, 2025 Page 37 of 173

- a. DEVELOPMENT OF ANY PARCEL OR LAND SHALL BE IN ACCORDANCE WITH THE DEVELOPMENT STANDARDS SET FORTH FOR A SINGLE DEVELOPMENT OPTION.
- <u>b.</u> A DEVELOPMENT OPTION FOR A PROPERTY IS CONSIDERED ESTABLISHED IF ONE OF THE FOLLOWING IS TRUE:
 - (1) A PRELIMINARY OR FINAL SITE PLAN HAS BEEN APPROVED FOR A PROPERTY AND IS STILL CONSIDERED VALID PER THE PROVISIONS OF SECTION 507.K.6.
 - (2) THE PROPERTY HAS STRUCTURES FOR WHICH BUILDING PERMITS WERE ISSUED IN COMPLIANCE WITH STANDARDS FOR A DEVELOPMENT OPTION WHICH WAS VALID AT THE TIME OF PERMIT ISSUANCE.
 - (3) THE PROPERTY IS PART OF A PLATTED AND RECORDED SUBDIVISION (ALSO SEE SUBSECTION G.2 BELOW).
- C. IF A DEVELOPMENT OPTION HAS ALREADY BEEN ESTABLISHED FOR A PROPERTY, SUBSEQUENT DEVELOPMENT OR REDEVELOPMENT OF THE PROPERTY MUST COMPLY WITH THE STANDARDS APPLICABLE TO THE ESTABLISHED DEVELOPMENT OPTION UNLESS USE PERMIT APPROVAL PER SECTION 307 IS OBTAINED, WITH THE FOLLOWING EXCEPTIONS:
 - (1) THE PROPERTY HAS BEEN REZONED PER SECTION 506 (BASE ZONING ONLY; DOES NOT INCLUDE HEIGHT OR DENSITY WAIVERS, SPECIAL PERMITS, OR ADDITION OF OVERLAY DISTRICTS); OR
 - (2) THE PROPERTY IS A PREVIOUSLY PLATTED SUBDIVISION AND THE ENTIRE SUBDIVISION IS TO BE REPLATTED; OR

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 38 of 173


(3) THE PROPERTY IS LOCATED WITHIN THE INFILL DEVELOPMENT DISTRICT AND IS BEING PLATTED AS A SINGLE-FAMILY INFILL (SFI) SUBDIVISION; OR


- (4) THE PROPERTY IS PART OF A MASTER PLAT SUCH AS: STATE PLATS; AGRICULTURAL/RANCHING SUBDIVISIONS; PLATS USED TO MAKE DEDICATIONS AND CREATE DEVELOPMENT BLOCKS WITHIN MASTER-PLANNED DEVELOPMENTS; OR OTHER ATYPICAL SUBDIVISION PLATS AS APPROVED BY THE ZONING ADMINISTRATOR.
- d. IF A DEVELOPMENT OPTION HAS NEVER BEEN ESTABLISHED FOR A PROPERTY, ANY APPLICABLE DEVELOPMENT OPTION MAY BE CHOSEN.
- 2. PLATTED SUBDIVISION LOTS SHALL COMPLY WITH THE STANDARDS APPLICABLE TO THE DEVELOPMENT OPTION STATED IN THE TITLE OF THE PLAT, AS FOLLOWS:
 - a. DEVELOPMENTS HAVING AN APPROVED FINAL SITE PLAN OR APPROVED SETBACK EXHIBIT ON FILE WITH THE PLANNING AND DEVELOPMENT DEPARTMENT MAY INSTEAD CHOOSE TO APPLY THE STANDARDS APPROVED PER THE PLAN/EXHIBIT, IF DIFFERENT FROM CURRENT STANDARDS. HOWEVER, ANY AMENDMENT TO A FINAL SITE PLAN OR SETBACK EXHIBIT SHALL BE IN ACCORDANCE WITH CURRENT DEVELOPMENT OPTIONS AND STANDARDS.
 - <u>b.</u> PLATS TITLED "STANDARD", "SUBDIVISION", "CONVENTIONAL", OR HAVING NO REFERENCE TO A DEVELOPMENT OPTION SHALL BE SUBJECT TO THE DEVELOPMENT REGULATIONS OF THE STANDARD OPTION.
 - C. PLATS TITLED "AVERAGE LOT" OR "PLANNED RESIDENTIAL DEVELOPMENT" SHALL BE SUBJECT TO THE DEVELOPMENT REGULATIONS OF THE PLANNED RESIDENTIAL DEVELOPMENT OPTION.

August 29, 2025 Page 39 of 173

- d. PLATS TITLED "SINGLE-FAMILY ATTACHED" OR "SINGLE-FAMILY INFILL" SHALL BE SUBJECT TO THE DEVELOPMENT REGULATIONS OF THE PLANNED RESIDENTIAL DEVELOPMENT OPTION, IN ADDITION TO THE STANDARDS OF SECTION 608.I.
- e. PLATS TITLED "PLANNED AREA DEVELOPMENT" SHALL BE SUBJECT TO THE PROVISIONS OF SECTION 635 WHEN ZONED PAD-1 THROUGH PAD-15. OTHER PLATS WITH THE SAME TITLE BUT NOT ZONED PAD-1 THROUGH PAD-15 SHALL BE SUBJECT TO THE DEVELOPMENT REGULATIONS OF THE PLANNED RESIDENTIAL DEVELOPMENT OPTION, OR THE BASE REGULATIONS OF THE DISTRICT IF THE PRD OPTION IS NOT OFFERED.
- <u>f.</u> FOR OTHER PLAT TITLES NOT IDENTIFIED WITHIN THIS SECTION, THE ZONING ADMINISTRATOR SHALL DETERMINE THE APPLICABLE DEVELOPMENT OPTION AND REGULATIONS.
- 3. STANDARD OPTION. WHEN A ZONING DISTRICT PROVIDES MULTIPLE DEVELOPMENT OPTIONS, THE DEVELOPMENT REGULATIONS FOR THE STANDARD OPTION ARE IDENTIFIED IN THE ASSOCIATED DEVELOPMENT STANDARDS TABLE FOR THAT DISTRICT. IF ONLY ONE SET OF DEVELOPMENT STANDARDS IS PROVIDED FOR A ZONING DISTRICT, THOSE STANDARDS SHALL BE CONSIDERED THE STANDARD OPTION.
- 4. PLANNED RESIDENTIAL DEVELOPMENT (PRD) OPTION. WHEN THE PLANNED RESIDENTIAL DEVELOPMENT OPTION IS UTILIZED FOR A SUBDIVISION AND/OR DEVELOPMENT, A SITE PLAN MUST BE SUBMITTED, REVIEWED, AND APPROVED IN ACCORDANCE WITH SECTION 507. THE SITE PLAN SHALL ILLUSTRATE COMPLIANCE WITH ALL OF THE DEVELOPMENT STANDARDS FOR THE PRD OPTION.

August 29, 2025 Page 40 of 173







Standard Option

Standard Subdivision

Planned Residential Development

H. Reserved. BONUS PROVISIONS.

1. **SINGLE-FAMILY SUBDIVISION DENSITY BONUS.** WHEN UTILIZING THE PLANNED RESIDENTIAL DEVELOPMENT OPTION, SINGLE-FAMILY SUBDIVISIONS IN THE RE-35, R1-18, R1-10, R1-8, R1-6, R-2, R-3, R-3A, R-4, AND R-5 DISTRICTS MAY EARN INCREASED DENSITY AS SHOWN IN TABLE 608.H.1 BY PROVIDING SITE AMENITIES AND ENHANCEMENTS FROM TABLE 608.H.2, UP TO THE MAXIMUM DENSITY PERMITTED BY THE DISTRICT:

TABLE 608.H.1			
PERM	IISSIBLE DENSITY BONUS BY DISTRICT		
RE-35 AND R1-18	0.05 ADDITIONAL PDU/ACRE PER 10 BONUS POINTS EARNED		
R1-10, R1-8, AND R1-6	0.10 ADDITIONAL PDU/ACRE PER 10 BONUS POINTS EARNED		
R-2, R-3, AND R-3A 0.25 ADDITIONAL PDU/ACRE PER 10 BONUS POINTS EARNED			
R-4 AND R-5	0.50 ADDITIONAL PDU/ACRE PER 10 BONUS POINTS EARNED		

August 29, 2025 Page 41 of 173

TABLE 608.H.2 SINGLE-FAMILY SUBDIVISION AMENITY BONUS POINTS **BONUS POINTS** CATEGORY PERIMETER/BACKUP TREATMENT INCREASE COMMON LANDSCAPED SETBACK 10 PTS. 1. ADJACENT TO PERIMETER STREET TO A MINIMUM 20 FEET. PROVIDE A MAJOR ENTRY FEATURE WITH A MINIMUM 1,500 SQ. FT. OF LANDSCAPED AREA 10 PTS./FEATURE 2. (EXCLUSIVE OF PERIMETER LANDSCAPING AND RIGHT-OF-WAY). PROVIDE A MINOR ENTRY FEATURE WITH A MINIMUM 1,000 SQ. FT. OF LANDSCAPED AREA 5 PTS./FEATURE 3. (EXCLUSIVE OF PERIMETER LANDSCAPING AND RIGHT-OF-WAY). STREETSCAPE PROVIDE DETACHED SIDEWALKS SEPARATED FROM THE CURB BY A MINIMUM 5-FOOT WIDE PLANTING AREA. PLANTING AREA SHALL BE PLANTED WITH 20 PTS. 4. MINIMUM 24-INCH BOX SIZE TREES PLANTED AT A RATE OF 1 PER LOT, TURF OR 5, 5-GALLON SHRUBS FOR EVERY TREE AND GROUND COVER; AND SUPPLIED WITH AN ADEQUATE IRRIGATION SYSTEM. PROVIDE LANDSCAPING AND IRRIGATION FOR ALL FRONT YARDS WITHIN THE DEVELOPMENT WHICH 10 PTS. 5. SHALL INCLUDE A MINIMUM OF 1 24-INCH BOX TREE. 5, 5-GALLON SHRUBS, AND GROUND COVER. RECEIVE AN ADDITIONAL 5 BONUS POINTS FOR 5 PTS. 5A. EACH ADDITIONAL TREE (MINIMUM 15-GALLON).

August 29, 2025 Page 42 of 173

TABLE 608.H.2 SINGLE-FAMILY SUBDIVISION AMENITY BONUS POINTS			
BONUS POINTS	CATEGORY		
10 PTS.	6.	PROVIDE PARTIAL TREATMENT OF PAVING SURFACES FOR DRIVEWAYS AND ON-LOT SIDEWALKS. PARTIAL TREATMENT SHALL CONSIST OF CONSISTENT ACCENT TREATMENT FOR ALL LIKE FEATURES, E.G. INTERSECTIONS, CROSSWALKS, BORDERS.	
10 PTS.	7.	PROVIDE PARTIAL TREATMENT OF PAVING SURFACES FOR ALL PRIVATE STREETS. PARTIAL TREATMENT SHALL CONSIST OF CONSISTENT ACCENT TREATMENT FOR ALL LIKE FEATURES, E.G. INTERSECTIONS, CROSSWALKS, BORDERS.	
10 PTS.	8.	PROVIDE PARTIAL TREATMENT OF PAVING SURFACES FOR ALL PRIVATE SIDEWALKS. PARTIAL TREATMENT SHALL CONSIST OF CONSISTENT ACCENT TREATMENT FOR ALL LIKE FEATURES, E.G., INTERSECTIONS, CROSSWALKS, BORDERS.	
2 PTS./FEATURE	9.	PROVIDE LANDSCAPED MEDIAN ISLANDS.	
5 PTS.	10.	PROVIDE A COMPREHENSIVE STREET FURNITURE PACKAGE CONSISTING OF CUSTOM STREET SIGNS, BUS SHELTERS AND BENCHES.	
5 PTS.	11. PROVIDE CUSTOM STREETLIGHT STANDARDS AND/OR FIXTURES.		
_	ARCHITECTURAL DESIGN		

August 29, 2025 Page 43 of 173

TABLE 608.H.2 SINGLE-FAMILY SUBDIVISION AMENITY BONUS POINTS **BONUS POINTS** CATEGORY PROVIDE A COMPREHENSIVE STREETSCAPE PLAN, DEVELOPMENT AGREEMENT OR OTHER MEANS WHICH SHALL ADDRESS VISUAL INTEREST AT A PEDESTRIAN SCALE; RHYTHM, FORM AND MASSING; 12. AND RELATIONSHIP OF UNITS TO EACH OTHER FOR 25 PTS. THE ENTIRE SUBDIVISION. SUCH PLAN SHALL PROVIDE ELEVATIONS, COLOR OPTIONS, AND LIMIT WHICH MODEL(S)/ELEVATION(S) MAY OR MAY NOT BE SITED ON INDIVIDUAL LOTS. PROVIDE HOUSE PLANS WHICH DEMONSTRATE AN 13. ENHANCED LEVEL OF ARCHITECTURAL DESIGN AS 25 PTS. APPROVED BY THE DESIGN ADVISOR. PROVIDE PREMIUM GRADE EXTERIOR MATERIALS 10 PTS. 14. AND FINISHES AS APPROVED BY THE DESIGN ADVISOR. OPEN SPACE/RECREATION PROVIDE ADDITIONAL COMMON OPEN SPACE, SUCH 2 PTS. THAT EACH ADDITIONAL 1% OF COMMON OPEN 15. SPACE EARNS 2 BONUS POINTS. PROVIDE MAJOR PRIVATE RECREATIONAL 10 PTS./FEATURE 16. AMENITIES (E.G., TENNIS COURTS, POOL, COMMUNITY MEETING ROOM). PROVIDE MINOR PRIVATE RECREATIONAL AMENITIES (E.G., BIKEPATH OR MULTI-USE TRAIL WHICH PROVIDE AN INTERNAL LINKAGE WITHIN THE 5 PTS./FEATURE 17. DEVELOPMENT AS WELL AS A CONNECTION TO SIMILAR FACILITIES LOCATED AT THE PERIMETER OF THE SITE).

August 29, 2025 Page 44 of 173

- 2. **MULTI-FAMILY OPEN SPACE BONUS**. WHEN UTILIZING THE PLANNED RESIDENTIAL OPTION, MULTI-FAMILY DEVELOPMENTS IN THE R-2, R-3, R-3A, R-4, AND R-5 DISTRICTS MAY EARN A ONE PERCENT DENSITY BONUS FOR EACH TWO PERCENT OF COMMON OPEN SPACE PROVIDED IN ADDITION TO ANY OTHER OPEN SPACE REQUIRED FOR THE DEVELOPMENT.
 - a. THE PLANNING AND DEVELOPMENT DEPARTMENT SHALL
 DETERMINE THE ADEQUACY OF COMMON OPEN SPACE AS
 PART OF THE DEVELOPMENT REVIEW PROCESS. OPEN SPACE
 SHALL NOT INCLUDE:
 - PUBLIC RIGHT-OF-WAY.
 - 2. VEHICULAR DRIVES OR PARKING AREAS.
 - 3. PRIVATE PATIO AREAS, NARROW STRIPS BETWEEN OR IN FRONT OF UNITS; OR, IN GENERAL, AREAS RESERVED FOR THE EXCLUSIVE USE OF INDIVIDUAL TENANTS.
 - 4. REQUIRED SETBACK AREAS AT THE EXTERIOR BOUNDARIES OF THE SITE.
 - 5. GOLF COURSES.
 - b. IN NO CASE SHALL THE DENSITY OF THE DEVELOPMENT EXCEED THE MAXIMUM DENSITY ALLOWED BY THE DISTRICT.
- 3. **AFFORDABLE HOUSING INCENTIVES.** IN ORDER TO OVERCOME A DEMONSTRATED DEFICIENCY IN THE SUPPLY OF HOUSING FOR PERSONS OF LOW INCOME, INCENTIVES ARE ESTABLISHED TO FOSTER THE PROVISION OF SUCH HOUSING.
 - a. APPLICABILITY. ALL DEVELOPMENT LOCATED WITHIN A ZONING DISTRICT SUBJECT TO THE PROVISIONS OF SECTION 608 PROVIDING AFFORDABLE HOUSING AS DEFINED IN SECTION 202.

August 29, 2025 Page 45 of 173

- b. DENSITY BONUS.
 - (1) ONE ADDITIONAL UNIT SHALL BE ALLOWED FOR EVERY TWO AFFORDABLE HOUSING UNITS, PROVIDED THAT THE OVERALL PROJECT DENSITY DOES NOT EXCEED 10 PERCENT BEYOND THAT WHICH WOULD OTHERWISE BE ALLOWED.
 - (2) A DENSITY BONUS AWARDED PER THIS SECTION SHALL APPLY TO THE MAXIMUM DENSITY FOR ANY DISTRICT AND MAY BE IN ADDITION TO A DENSITY BONUS EARNED PER THE PROVISIONS OF SECTIONS 608.H.1 or 608.H.2.
- c. OTHER REQUIREMENTS. THE TOTAL NUMBER OF UNITS
 WITHIN A PROJECT SHALL BE AS APPROVED BY THE HOUSING
 DEPARTMENT.
- I. Development Regulations. Following are definitions of terms used in the development standards tables for each district:
 - 1. **Minimum lot dimension:** The minimum width and depth of lot lines and where specified, the minimum area of each lot.
 - 2. **Dwelling unit density:** The total number of dwelling units on a site divided by the gross area of the site.
 - a. Density Bonus Points. Additional density may be granted by earning density bonus points by providing site enhancements from the table below, as follows:
 - (1) Single-family detached development in the R1-10 through R1-6 districts (Sections 611 through 613) may earn increased density of 0.1 du/ac for each ten density bonus points earned when also using the planned residential development option, up to the maximum density allowed by the district.

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 46 of 173

(2) Single-family detached development in the R-2 through R-4A districts (Sections 614 through 619) may earn increased density of 0.275 du/ac for each five density bonus points earned when also using the planned residential development option, up to the maximum density allowed by the district. However, at least half of the bonus points used to achieve densities in excess of 7.5 du/ac must be from the architectural design bonus point category.

Bonus Points	Enhancement Category		
	PERIMETER	R/BACKUP TREATMENT	
10 pts.	4.	Increase common landscaped setback adjacent to perimeter street to 20' avg./15' minimum.	
10 pts./feature	2.	Provide a major entry feature with a minimum 1,500 sq. ft. of landscaped area (exclusive of perimeter landscaping and right-of-way).	
5 pts./feature	3.	Provide a minor entry feature with a minimum 1,000 sq. ft. of landscaped area (exclusive of perimeter landscaping and right-of-way).	
	STREETSC	APE	
20 pts.	1.	Provide detached sidewalks separated from the curb by a minimum 5'-wide planting area. Planting area shall be planted with minimum 24"-box size trees planted at a rate of 1 per lot, turf or 5 5-gallon shrubs for every tree and ground cover; and supplied with an adequate irrigation system.	
10 pts.	2.	Provide landscaping and irrigation for all front yards within the development which shall include a minimum of 1 24"-box tree, 5 5-gallon shrubs, and ground cover.	
5 pts.	2a.	Receive an additional 5 bonus points for each additional tree (minimum 15-gallon).	
10 pts.	3.	Provide partial treatment of paving surfaces for driveways and on-lot sidewalks. Partial treatment	

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 47 of 173

		shall consist of consistent accent treatment for all like features, e.g. intersections, crosswalks, borders.
10 pts.	4.	Provide partial treatment of paving surfaces for all private streets. Partial treatment shall consist of consistent accent treatment for all like features, e.g. intersections, crosswalks, borders.
10 pts.	5.	Provide partial treatment of paving surfaces for all private sidewalks. Partial treatment shall consist of consistent accent treatment for all like features, e.g., intersections, crosswalks, borders.
2 pts./feature	6.	Provide landscaped median islands.
5 pts.	7.	Provide a comprehensive street furniture package consisting of custom street signs, bus shelters and benches.
5 pts.	8	Provide custom streetlight standards and/or fixtures.
	ARCHITEC	TURAL DESIGN
25 pts.	1.	Provide a comprehensive streetscape plan, development agreement or other means which shall address visual interest at a pedestrian scale; rhythm, form and massing; and relationship of units to each other for the entire subdivision. Such plan shall provide elevations, color options, and limit which model(s)/elevation(s) may or may not be sited on individual lots.
25 pts.	2.	Provide house plans which demonstrate an enhanced level of architectural design as approved by the design advisor.
10 pts.	3.	Provide premium grade exterior materials and finishes as approved by the design advisor.
	OPEN SPA	CE/RECREATION
2 pts.	1.	Provide additional common area, such that each additional 1% of common area earns 2 bonus points.
10 pts./feature	2.	Provide major private recreational amenities (e.g., tennis courts, pool, community meeting room).

August 29, 2025 Page 48 of 173

5 pts./feature


- 3. Provide minor private recreational amenities (e.g., bikepath or multi-use trail which provide an internal linkage within the development as well as a connection to similar facilities located at the perimeter of the site).
- b. Additional Common Area/Open Space. Additional density may be granted by providing additional common area above any minimum requirements as follows:
 - (1) Qualifying developments (listed below) may earn:
 - (a) A one percent density bonus for each four percent of basic common area; or
 - (b) A one percent density bonus for each two percent of improved common area.
 - (c) The Planning and Development Department shall determine the adequacy of both basic and improved common areas as part of the development review process. Open space shall not include:
 - (i) Public right-of-way.
 - (ii) Vehicular drives or parking areas.
 - (iii) Private patio areas, narrow strips between or in front of units; or, in general, areas reserved for the exclusive use of individual tenants.
 - (iv) Required setback areas at the exterior boundaries of the site.
 - (v) Golf courses.
 - (d) In no case shall the density of the development exceed the maximum density allowed by the district.

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 49 of 173

- (2) Developments qualifying for the additional common area/open space density bonus are as follows:
 - (a) Single-family development in the RE-35 and R1-18 zoning districts (Sections 609 and 610), when also using the planned residential development option.
 - (b) Single-family attached development in the R1-10 through R-4A zoning districts (Sections 611 through 619), when using the planned residential development option.
 - (c) Single-family development in the R-2 through R-4A zoning districts (Sections 614 through 619), when using the single-family infill development option.
 - (d) Multi-family development in the R1-10 through R-4A zoning districts (Sections 611 through 619), when using the planned residential development option.
- 3. Perimeter standards: Setbacks for structures which are required at the perimeter of a development. These standards shall apply only to lots which are created by a subdivision or a project approved under the provisions of Section 507. These standards shall not apply in the following circumstances: when contiguous developments are to be developed using the same development option with the same perimeter standards and are on the same preliminary plat or are platted concurrently; when the perimeter of a development is contiguous to a permanent open space, such as a natural wash, hillside preserve, or existing golf course, the depth of which is at least forty feet; or when the development was properly platted prior to September 13, 1981.
- 4. **Building setback:** The required separation of buildings from lot lines.
- 5. **Maximum height:** The maximum allowed height as measured from natural grade which measurement shall be as in chapter 2.
- 6. **Lot coverage:** The maximum area of a lot occupied by structures and open projections as defined in chapter 2.

August 29, 2025 Page 50 of 173


- 7. Common areas: Required areas in a planned residential development to be used and enjoyed by residents of a development and either improved in accordance with the standards in chapter 2 or maintained in a natural state as approved by the Planning and Development Department.
- 8. Allowed Development: The development options tables provided in Sections 609 through 619 indicate the only types of residential development permitted under each development option and associated development regulations. The complete list of all permitted uses, including accessory and temporary uses, is provided in Section 608.C.
- 9. Required review: Development review in accordance with Section 507 of this ordinance, and subdivision review in accordance with chapter 32 of the Phoenix City Code when new lots are created.
- 10. **Required parking:** The minimum number of off-street parking spaces to be provided and which shall be according to Section 702.A.
- 11. **Street standards:** The class of street required to provide access to any parcel or subdivided lot within a development.

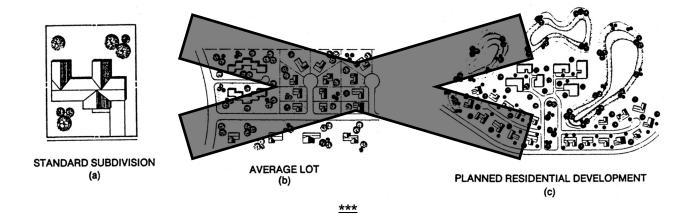

August 29, 2025 Page 51 of 173

- 1. SINGLE-FAMILY INFILL (SFI) SUBDIVISIONS.
 - 1. **APPLICABILITY.** THE SINGLE-FAMILY INFILL REGULATIONS OF THIS SECTION SHALL APPLY TO SUBDIVISIONS MEETING ALL OF THE FOLLOWING CRITERIA:
 - a. THE SUBDIVISION IS NOT ZONED HP OR HP-L, NOR DESIGNATED AS HISTORIC ON THE NATIONAL REGISTER OF HISTORICAL PLACES.
 - b. THE SUBDIVISION IS ZONED R-2, R-3, R-3A, R-4, R-5, R-4A, C-1, C-2, C-3, DTC, OR WU CODE;
 - c. THE SUBDIVISION EITHER UTILIZES THE PLANNED
 RESIDENTIAL DEVELOPMENT (PRD) OPTION, OR THE DISTRICT
 SPECIFICALLY STATES THAT AN SFI SUBDIVISION MAY BE
 DEVELOPED PER THE PROVISIONS OF THIS SECTION:
 - d. THE SUBDIVISION IS EITHER LOCATED WITHIN THE INFILL DEVELOPMENT DISTRICT IDENTIFIED IN THE GENERAL PLAN, OR THE SUBDIVISION IS LOCATED WITHIN THE AREA IDENTIFIED AS "APPLICABLE AREA FOR SINGLE-FAMILY INFILL DEVELOPMENT" SHOWN IN FIGURE 608.I.1 AND HAS OBTAINED USE PERMIT APPROVAL; AND
 - e. FOR EXISTING SUBDIVISIONS RECORDED PRIOR TO 2024 ONLY: THE PLAT HAS THE SUBTITLE "A SINGLE-FAMILY ATTACHED SUBDIVISION"; "A SINGLE-FAMILY INFILL SUBDIVISION"; "SINGLE-FAMILY ATTACHED DEVELOPMENT OPTION"; OR ANOTHER ANALOGOUS SUBTITLE AS DETERMINED BY THE ZONING ADMINISTRATOR.

FIGURE 608.I.1
SINGLE-FAMILY INFILL SUBDIVISION DEVELOPMENT AREAS

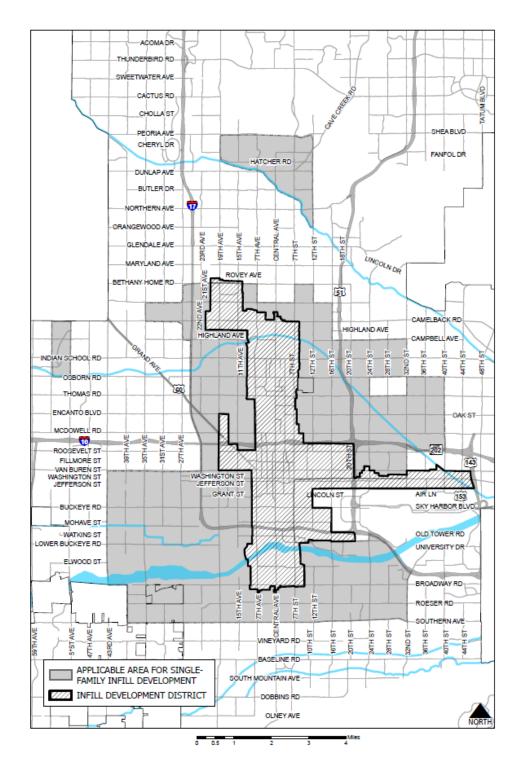

August 29, 2025 Page 53 of 173

2. **SPECIAL PLANNING AREAS.** WHERE CONFLICTS OCCUR BETWEEN THE REQUIREMENTS OF THIS SECTION AND REDEVELOPMENT AREAS, OVERLAY ZONING DISTRICTS, SPECIAL PLANNING DISTRICTS, AND SPECIFIC PLANS, THE REQUIREMENTS OF THE OVERLAY ZONING DISTRICTS, SPECIAL PLANNING DISTRICTS, REDEVELOPMENT AREAS OR SPECIFIC PLANS SHALL APPLY.

3. **SFI DEVELOPMENT STANDARDS.**

a. THE FOLLOWING TABLE PROVIDES MODIFIED DEVELOPMENT STANDARDS TO BE APPLIED TO AN SFI SUBDIVISION DEVELOPED UNDER THE PLANNED RESIDENTIAL DEVELOPMENT OPTION:

MOD	TABLE 608.I.3: MODIFIED PRD DEVELOPMENT STANDARDS FOR SINGLE-FAMILY INFILL SUBDIVISIONS				
(1)	LOT WIDTH (MINIMUM)	20 FEET			
(2)	LOT DEPTH (MINIMUM)	NONE			
(3)	DEVELOPMENT DENSITY (MAXIMUM)	SAME AS BASE ZONING DISTRICT			
(4)	SUBDIVIDED LOTS (MAXIMUM)	SAME AS BASE ZONING DISTRICT			
(5)	INDIVIDUAL LOT SETBACKS (MINIMUM)	NONE			
(6)	GARAGE DOOR/CARPORT ENTRY SETBACK (MINIMUM)	THREE FEET			
(7)	PROJECTIONS	PER SECTION 701.A.3.c			
(8)	DEVELOPMENT PERIMETER BUILDING SETBACKS (MINIMUM)	PERIMETER STREET, FRONT: 10 FEET PERIMETER STREET, SIDE: 15 FEET PERIMETER STREET, REAR: PER SECTION 608.1.4.d OTHER PERIMETER: 10 FEET			

August 29, 2025 Page 54 of 173

MOD	TABLE 608.I.3: MODIFIED PRD DEVELOPMENT STANDARDS FOR SINGLE-FAMILY INFILL SUBDIVISIONS				
(9)	PERIMETER STREET LANDSCAPE SETBACKS (MINIMUM)	10 FEET, REQUIRED TO BE COMMUNITY/ASSOCIATION MAINTAINED. MAY BE PROVIDED AS PART OF THE REQUIRED BUILDING SETBACK.			
(10)	BUILDING HEIGHT (MAXIMUM)	PER SECTION 608.1.3.b			
(11)	LOT COVERAGE (MAXIMUM)	INDIVIDUAL LOTS: NO MAXIMUM OTHER PARCELS/TRACTS: 50%			
(12)	COMMON OPEN SPACE (MINIMUM)	SAME AS BASE ZONING DISTRICT			
(13)	(13) STREET FRONTAGE PER SECTION 608.I.7				
(14)	OTHER APPLICABLE REGULATIONS:	SUBDIVISIONS: CHAPTER 32, CITY CODE DESIGN REVIEW: SECTION 507 TAB A BONUS: SECTION 608.H			

b. MAXIMUM BUILDING HEIGHT.

- (1) IN ALL DISTRICTS, THERE SHALL BE A 15-FOOT MAXIMUM HEIGHT WITHIN TEN FEET OF A SINGLE-FAMILY ZONING DISTRICT, WHICH HEIGHT MAY BE INCREASED ONE FOOT FOR EACH ADDITIONAL ONE FOOT OF BUILDING SETBACK TO THE MAXIMUM PERMITTED HEIGHT.
- (2) FOR PROPERTIES ZONED R-5, THE MAXIMUM PERMITTED HEIGHT IS 48 FEET.
- (3) FOR PROPERTIES ZONED DTC, THE MAXIMUM HEIGHT SHALL BE AS PERMITTED BY THE APPLICABLE CHARACTER AREA.
- (4) FOR PROPERTIES ZONED WU CODE, THE MAXIMUM HEIGHT SHALL BE AS PERMITTED BY THE APPLICABLE TRANSECT.

August 29, 2025 Page 55 of 173

(5) IN ALL OTHER DISTRICTS, THE MAXIMUM PERMITTED HEIGHT IS 40 FEET WITHIN 150 FEET OF THE DEVELOPMENT PERIMETER, WITH A ONE-FOOT HEIGHT INCREASE PERMITTED FOR EACH ADDITIONAL ONE-FOOT SETBACK TO A MAXIMUM PERMITTED HEIGHT OF 48 FEET.

C. ALL OTHER DEVELOPMENT REGULATIONS FOR THE UNDERLYING ZONING DISTRICT ARE APPLICABLE UNLESS SPECIFICALLY MODIFIED BY THE PROVISIONS OF THIS SECTION.

4. SINGLE-FAMILY INFILL DESIGN REVIEW REQUIREMENTS.

- a. INDIVIDUAL UNITS FRONTING ON STREET RIGHTS-OF-WAY SHALL PROVIDE A FRONT ENTRY THAT IS EITHER ELEVATED, DEPRESSED OR INCLUDES A FEATURE SUCH AS A LOW WALL TO ACCENTUATE THE PRIMARY ENTRANCE. (R*)
- <u>b.</u> REQUIRED PARKING SPACES SHALL NOT FRONT ON OR BE ACCESSED FROM A PERIMETER STREET. (R*)
- c. FRONT-FACING GARAGE DOORS AND CARPORTS SHALL BE NO WIDER THAN 50 PERCENT OF WIDTH OF THE BUILDING ENVELOPE AS MEASURED AT THE MINIMUM REQUIRED FRONT SETBACK. (R*)
- d. NO REAR PROPERTY LINE OF ANY LOT IN AN SFI SUBDIVISION SHALL ABUT EITHER A PERIMETER STREET OR AN ASSOCIATED PERIMETER STREET LANDSCAPE SETBACK AREA. (R*)
- e. ATTACHED DWELLING UNITS CONSTRUCTED IN A ROW SHALL NOT EXCEED A TOTAL LENGTH OF 200 FEET WITHOUT HAVING A MINIMUM 20-FOOT-WIDE OPEN AREA. (R*)

5. **LANDSCAPE REQUIREMENTS.**

August 29, 2025 Page 56 of 173

- a. TREES SHALL BE PROVIDED IN REQUIRED LANDSCAPE
 SETBACKS AT A MINIMUM RATE OF 20 FEET ON CENTER OR
 EQUIVALENT GROUPINGS, AS APPROVED BY THE PDD
 LANDSCAPE ARCHITECT, SUBJECT TO THE FOLLOWING: (T)
 - (1) FIFTY PERCENT OF THE REQUIRED TREES SHALL BE MINIMUM ONE-AND-ONE-HALF-INCH CALIPER AT THE TIME OF INSTALLATION.
 - (2) TWENTY-FIVE PERCENT OF THE REQUIRED TREES SHALL BE MINIMUM TWO-INCH CALIPER OR MULTI-TRUNKED TREES AT THE TIME OF INSTALLATION.
 - (3) TWENTY-FIVE PERCENT OF THE REQUIRED TREES SHALL BE MINIMUM THREE-INCH CALIPER OR MULTI-TRUNKED TREES AT THE TIME OF INSTALLATION.
- <u>b.</u> A MINIMUM OF FIVE, FIVE-GALLON SHRUBS PER TREE SHALL BE PROVIDED. (T)
- 6. **PARKING REQUIREMENTS.** SECTION 702 APPLIES TO SFI DEVELOPMENT, EXCEPT WHERE SPECIFICALLY MODIFIED BY THIS SECTION.
 - <u>a.</u> A MINIMUM OF ONE COVERED PARKING SPACE PER DWELLING UNIT MUST BE PROVIDED ON THE SAME LOT AS THE UNIT FOR WHICH IT IS PROVIDED.
 - <u>b.</u> COVERED PARKING SETBACKS ARE NOT REQUIRED TO BE LARGER THAN THE BUILDING SETBACKS REQUIRED FOR THE DWELLING UNIT.
 - c. A MINIMUM 0.25 ADDITIONAL UNRESERVED GUEST PARKING SPACE PER DWELLING UNIT MUST BE PROVIDED WITHIN ANY SFI DEVELOPMENT.
- 7. VEHICULAR ACCESS AND MANEUVERING.

August 29, 2025 Page 57 of 173

- <u>a.</u> ALL MANEUVERING FOR ON-SITE PARKING MUST BE LOCATED ON PRIVATE PROPERTY AND NOT WITHIN PUBLIC RIGHT-OF-WAY. (T)
- <u>b.</u> ACCESS TO AN SFI SUBDIVISION FROM A PUBLIC STREET OR PRIVATE ACCESSWAY IS PERMITTED. (T)
- C. ACCESS TO AN SFI SUBDIVISION FROM AN ALLEY IS
 PERMITTED WHEN LOCATED WITHIN THE INFILL
 DEVELOPMENT DISTRICT AND THE STREET TRANSPORTATION
 DEPARTMENT HAS APPROVED MINIMUM WIDTH AND MINIMUM
 PAVING STANDARDS FOR THE ALLEY. (T)
- d. ACCESS TO AN SFI SUBDIVISION FROM AN ALLEY IS PERMITTED WHEN LOCATED WITHIN THE AREA IDENTIFIED AS "APPLICABLE AREA FOR SINGLE-FAMILY INFILL DEVELOPMENT" SHOWN IN FIGURE 608.I.1, WITH THE FOLLOWING CONDITIONS:
 - (1) THE SFI SUBDIVISION IS NOT LOCATED ACROSS THE ALLEY FROM EITHER A SINGLE-FAMILY OR HP ZONING DISTRICT. (R)
 - (2) THE STREET TRANSPORTATION DEPARTMENT HAS APPROVED MINIMUM WIDTH AND MINIMUM PAVING STANDARDS FOR THE ALLEY. (T)
- <u>e.</u> INDIVIDUAL LOTS MAY FRONT ON A PUBLIC STREET, PRIVATE ACCESSWAY, OR PRIVATE DRIVE, AS APPROVED BY THE CITY TO ALLOW FOR SUFFICIENT MANEUVERING AND PUBLIC UTILITY ACCESS. (T)

8. **WALLS/FENCES.**

<u>a.</u> THE MAXIMUM WALL/FENCE HEIGHT PERMITTED WITHIN REQUIRED PERIMETER LANDSCAPE SETBACKS IS 40 INCHES. (R*)

August 29, 2025 Page 58 of 173

- <u>b.</u> THE MAXIMUM WALL/FENCE HEIGHT PERMITTED WITHIN REQUIRED OPEN SPACE AREAS IS 40 INCHES, WITH THE EXCEPTION OF REQUIRED POOL FENCES AND OTHER NECESSARY VIEW FENCES, AS APPROVED BY PDD. (R*)
- 9. **SIGNAGE.** SIGNAGE IS SUBJECT TO THE REGULATIONS OF SECTION 705, TABLE D-1, SINGLE-FAMILY RESIDENTIAL.
- J. Incentives for Affordable Housing. In order to overcome a demonstrated deficiency in the supply of housing for persons of low and moderate income, incentives are established to foster the provision of such housing.
 - 1. Applicability. All development located within a zoning district subject to the provisions of Section 608 providing affordable housing as defined in Section 202.
 - 2. Density Bonus.
 - a. One additional unit shall be allowed for every two affordable housing units; provided, that the overall project density does not exceed ten percent beyond that which would otherwise be allowed.
 - b. A density bonus awarded per this section shall apply to the maximum density for any district and may be in addition to a density bonus earned per the provisions of Section 608.1.2.
 - 3. Other Requirements. The total number of units within a project shall be as approved by the Department of Housing.
- J. OFF-SITE MANUFACTURED HOME DEVELOPMENTS. OFF-SITE
 MANUFACTURED HOME DEVELOPMENT IS SUBJECT TO USE PERMIT
 APPROVAL IN THE C-1, C-2, AND C-3 DISTRICTS, IN ADDITION TO ZONING
 DISTRICTS INDICATED IN SECTION 608.D; AND SUBJECT TO THE
 FOLLOWING ADDITIONAL DEVELOPMENT REGULATIONS:
 - 1. THE PROVISIONS OF SECTION 703.B DO NOT APPLY TO OFF-SITE MANUFACTURED HOME DEVELOPMENTS.
 - 2. THESE REGULATIONS APPLY TO DEVELOPMENT OF A SINGLE LOT OR PARCEL, NOT TO BE FURTHER SUBDIVIDED.

August 29, 2025 Page 59 of 173

- 3. PLACEMENT FOR EACH OFF-SITE MANUFACTURED HOME SHALL BE PROVIDED AS FOLLOWS:
 - a. THERE SHALL BE A MINIMUM OF 20 FEET BETWEEN OFF-SITE MANUFACTURED HOMES AND TEN FEET BETWEEN AWNINGS AND CANOPIES. ALL ANNEXES OR STRUCTURAL ADDITIONS SHALL BE CONSIDERED PART OF THE OFF-SITE MANUFACTURED HOME.
 - <u>b.</u> THERE SHALL BE AT LEAST 40 FEET BETWEEN OFF-SITE MANUFACTURED HOMES ON OPPOSITE SIDES OF A PRIVATE ACCESSWAY.
 - C. NO OFF-SITE MANUFACTURED HOME, ANNEX OR STRUCTURAL ADDITION SHALL BE CLOSER THAN EIGHT FEET TO ANY PRIVATE ACCESSWAY OR PRIVATE DRIVE.
- 4. EACH OFF-SITE MANUFACTURED HOME SPACE SHALL HAVE PRIVATE OUTDOOR LIVING SPACE OF AT LEAST 150 SQUARE FEET. THE DIMENSION OF THIS SPACE SHALL BE AT LEAST 15 FEET IN WIDTH.
- 5. AT EACH OCCUPIED OFF-SITE MANUFACTURED HOME SPACE,
 THERE SHALL BE AN ENCLOSED STORAGE LOCKER FOR YARD
 TOOLS AND OTHER BULKY ITEMS CONVENIENT TO THE SPACE WITH
 A STORAGE CAPACITY OF AT LEAST 150 CUBIC FEET.
- 6. ALL AREAS NOT COVERED BY STRUCTURES OR PAVED SURFACES SHALL BE LANDSCAPED AND MAINTAINED IN ACCORDANCE WITH THE APPROVED DEVELOPMENT REVIEW DOCUMENTS REQUIRED UNDER SECTION 507.
- 7. SCREENING THE PERIMETER OF AN OFF-SITE MANUFACTURED HOME DEVELOPMENT BY A WALL OR OTHER APPROVED MATERIAL MAY BE REQUIRED AS A CONDITION OF USE PERMIT APPROVAL.

August 29, 2025 Page 60 of 173

- 8. THERE SHALL BE A NETWORK OF PEDESTRIAN WALKWAYS
 CONNECTING OFF-SITE MANUFACTURED HOME SPACES WITH EACH
 OTHER AND WITH DEVELOPMENT FACILITIES AND AMENITIES.
- 9. IF STORAGE YARDS ARE PROVIDED, THERE SHALL BE A SCREENED STORAGE YARD OR YARDS FOR BOATS, RECREATIONAL VEHICLES, ETC. SUCH STORAGE YARDS SHALL HAVE A MINIMUM OF 60 SQUARE FEET OF STORAGE SPACE FOR EACH OFF-SITE MANUFACTURED HOME SPACE IN THE DEVELOPMENT AND SHALL BE LOCATED SO AS TO NOT DETRACT FROM SURROUNDING PROPERTIES. ALL BOATS AND RECREATIONAL VEHICLES SHALL BE PARKED IN THE STORAGE YARD.
- 10. EACH OFF-SITE MANUFACTURED HOME SHALL (1) BE AFFIXED PERMANENTLY TO THE GROUND OR (2) HAVE SKIRTING AROUND ITS PERIMETER TO SCREEN ITS WHEELS AND UNDERCARRIAGE.
- 11. ALL UTILITIES AND THE WIRES OF ANY CENTRAL TELEVISION OR RADIO ANTENNA SYSTEM SHALL BE UNDERGROUND.
- 12. NOT MORE THAN 15 PERCENT OF THE SPACES IN ANY ONE OFF-SITE MANUFACTURED HOME DEVELOPMENT SHALL BE DEVELOPED OR USED FOR RECREATIONAL VEHICLES.
- 13. DEVELOPMENT OF OFF-SITE MANUFACTURED HOME COMMUNITIES SHALL BE UNDER THE PLANNED RESIDENTIAL DEVELOPMENT OPTION APPLICABLE IN THE UNDERLYING ZONING DISTRICT.
- 14. PRIVATE DRIVES MAY BE USED FOR ACCESS TO EACH OFF-SITE MANUFACTURED HOME.
- 15. THERE SHALL BE A MINIMUM OF FIVE PERCENT OF THE TOTAL AREA OF THE OFF-SITE MANUFACTURED HOME DEVELOPMENT DEDICATED OR RESERVED AS USABLE COMMON OPEN SPACE LAND. COMMON OPEN SPACE LANDS SHALL BE CLEARLY DESIGNATED ON THE PLAN AS TO THE CHARACTER OF USE AND DEVELOPMENT BUT SHALL NOT INCLUDE:

August 29, 2025 Page 61 of 173

- a. AREAS RESERVED FOR THE EXCLUSIVE USE OR BENEFIT OF AN INDIVIDUAL TENANT OR OWNER; NOR
- <u>b.</u> DEDICATED STREETS, ALLEYS, AND OTHER PUBLIC RIGHTS-OF-WAY; NOR
- VEHICULAR DRIVES, PARKING, LOADING, AND STORAGE AREAS; NOR
- <u>d.</u> REQUIRED SETBACK AREAS AT EXTERIOR BOUNDARIES OF THE SITE; NOR
- e. GOLF COURSES.

ADEQUATE GUARANTEES MUST BE PROVIDED TO ENSURE PERMANENT RETENTION OF OPEN SPACE LAND AREA RESULTING FROM THE APPLICATION OF THESE REGULATIONS, EITHER BY PRIVATE RESERVATION FOR THE USE OF THE RESIDENTS WITHIN THE DEVELOPMENT OR BY DEDICATION TO THE PUBLIC, OR A COMBINATION THEREOF.


Amend Chapter 6, Section 609 (RE-35 Single-Family Residence District) to read as follows:


Section 609. RE-35 Single-Family Residence District


B. **District Regulations.** The following tables establishES standards to be used in the RE-35 district. The definitions of terms used in these standards are found in Section 608.I. REFER TO SECTION 608, RESIDENTIAL DISTRICTS, FOR PERMITTED USES AND ADDITIONAL DEVELOPMENT REGULATIONS.


ILLUSTRATIONS OF DEVELOPMENT OPTIONS


August 29, 2025 Page 62 of 173



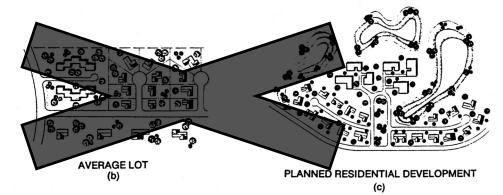







Standard Option

Standard Subdivision

Planned Residential Development

Table 609.A RE-35 Development Options				
Standards	(c) Planned Residential Development			
Minimum lot dimensions (width and depth)	150' width, 175' depth (Minimum area 35,000 sq. ft.)	100' width, 125' depth	None	
Dwelling unit density (units/gross acre)	1.10	1.10	1.15; 1.32 with bonus	
Perimeter standards	None	40' front or rear, 20' side	40' adjacent to a public street ⁽²⁾ ; this area is to be in common ownership unless lots front on the perimeter public street; 20' adjacent to property line	
Building setbacks	40' front, 40' rear, 20' side	25' front, 50' total front and rear	25' front	
Maximum height	2 stories and 30'	2 stories and 30'	2 stories and 30'	

August 29, 2025 Page 63 of 173

Table 609.A RE-35 Development Options					
Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development		
Lot coverage	25%, except if all structures are less than 20' and 1 story in height then a maximum of 40% lot coverage is allowed.	30%, plus an additional 10% for an ADU and/or attached shade structures. Total: 40%.	30%, plus an additional 10% for an ADU and/or attached shade structures. Total: 40%.		
Common areas	None	None	Minimum 5% of gross area		
Allowed development	Single-family detached	Single-family attached; plus (a)	Single family attached; plus		
Required review	Subdivision to create 4 or more lots	Subdivision with building setbacks	Site plan per Section 507		
Street standards	Public street required	Public street	Public street or private accessway (1)		

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.

	TABLE 609.1 RE-35 DEVELOPMENT STANDARDS				
CATEGORY (A) STANDARD OPTION		. ,	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)		
(1)	LOT WIDTH (MINIMUM)	150 FEET	NONE.		
(2)	LOT DEPTH (MINIMUM)	175 FEET	NONE.		
(3)	DEVELOPMENT DENSITY (MAXIMUM)	1.2 PDU/AC (GROSS)	1.2 PDU/AC (GROSS); 1.5 WITH BONUS		
(4)	SUBDIVIDED LOTS (MAXIMUM)	1.2 LOTS/AC (GROSS)	1.2 LOTS/AC (GROSS); 1.5 WITH BONUS		

August 29, 2025 Page 64 of 173

	TABLE 609.1 RE-35 DEVELOPMENT STANDARDS				
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)		
(5)	INDIVIDUAL LOT SETBACKS (MINIMUM)	FRONT: 40 FEET REAR: 40 FEET SIDES: 20 FEET	FRONT: 25 FEET REAR: NONE STREET SIDE: 10 FEET INTERIOR SIDES: NONE		
(6)	GARAGE DOOR/CARPORT ENTRY SETBACK (MINIMUM)	SAME AS INDIVIDUAL LOT SETBACKS	SAME AS INDIVIDUAL LOT SETBACKS		
(7)	PROJECTIONS	PER SECTION 701.A.3.A	PER SECTION 701.A.3.B		
(8)	DEVELOPMENT PERIMETER BUILDING SETBACK (MINIMUM)	NONE	PERIMETER STREET: 40 FEET. OTHER PROPERTY LINE: 20 FEET		
(9)	PERIMETER STREET LANDSCAPE SETBACK (MINIMUM)	NONE	20 FEET, EXCEPT NONE ON LOTS WHICH FRONT ON A PERIMETER STREET. MAY BE PROVIDED AS PART OF THE REQUIRED BUILDING SETBACK.		
(10)	BUILDING HEIGHT (MAXIMUM)	2 STORIES AND 30 FEET	2 STORIES AND 30 FEET		
(11)	LOT COVERAGE (MAXIMUM)	25%, EXCEPT IF ALL STRUCTURES ARE LESS THAN 20' AND 1 STORY IN HEIGHT THEN A MAXIMUM OF 40% LOT COVERAGE IS ALLOWED.	40% TOTAL FOR DEVELOPMENT		
(12)	COMMON OPEN SPACE (MINIMUM)	NONE	5% OF GROSS AREA		
(13)	STREET FRONTAGE REQUIREMENT	PUBLIC STREET	PUBLIC STREET OR PRIVATE ACCESSWAY		

August 29, 2025 Page 65 of 173


	TABLE 609.1 RE-35 DEVELOPMENT STANDARDS				
CATE	EGORY	(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)		
(14)	OTHER APPLICABLE REGULATIONS:	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; BONUS: SECTION 608.H		

Amend Chapter 6, Section 610 (R1-18 Single-Family Residence District) to read as follows:


Section 610. R1-18 Single-Family Residence District

B. **District Regulations.** The following tables establishES standards to be used IN THE R1-18 DISTRICT-for each district. The definitions of terms used in these standards are found in Section 608.I. REFER TO SECTION 608, RESIDENTIAL DISTRICTS, FOR PERMITTED USES AND ADDITIONAL DEVELOPMENT REGULATIONS.


ILLUSTRATIONS OF DEVELOPMENT OPTIONS

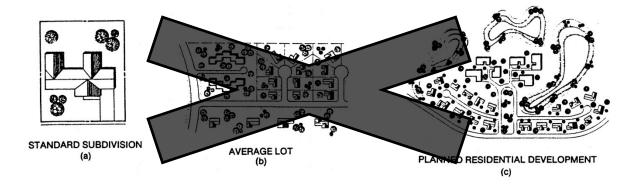


August 29, 2025 Page 66 of 173







Standard Subdivision



Planned Residential Development

Illustrations of Development Options

Table 610.A R1-18 Development Options				
Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	
Minimum lot dimensions (width and depth)	130' width, 120' depth (Minimum area 18,000 sq. ft.)	90' width, 80' depth	None	
Dwelling unit density (units/gross acre)	1.95	1.95	2.05; 2.34 with bonus	
Perimeter standards	None	30' front or rear, 10' side	20' adjacent to a public street(2); this area is to be in common ownership unless lots front on the perimeter public street; 15' adjacent to property line	
Building setbacks	25' front, 30' rear, 10' side	25' front, 50' total front plus rear	25' front	
Maximum height	2 stories and 30'	2 stories and 30'	2 stories and 30'	
Lot coverage	30%, plus an additional 10% for an ADU and/or attached shade structures	30%, plus an additional 10% for an ADU and/or attached shade structures	30%, plus an additional 10% for an ADU and/or attached shade structures Total: 40%	
Common areas	None	None	Minimum 5% of gross area	

August 29, 2025 Page 67 of 173

Table 610.A R1-18 Development Options				
Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	
Allowed development	Single-family detached	Single-family attached; plus (a)	Single-family attached; plus	
Required review	Subdivision to create 4 or more lots	Subdivision with building setbacks	Site plan per Section 507	
Street standards	Public street required	Public street	Public street or private accessway (1)	

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.

TABLE 610.1 R1-18 DEVELOPMENT STANDARDS			
CATE	EGORY	(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)
(1)	LOT WIDTH (MINIMUM)	130 FEET	NONE.
(2)	LOT DEPTH (MINIMUM)	120 FEET	NONE.
(3)	DEVELOPMENT DENSITY (MAXIMUM)	2.0 PDU/AC (GROSS)	2.0 PDU/AC (GROSS); 2.5 WITH BONUS
(4)	SUBDIVIDED LOTS (MAXIMUM)	2.0 LOTS/AC (GROSS)	2.0 LOTS/AC (GROSS); 2.5 WITH BONUS
(5)	INDIVIDUAL LOT SETBACKS (MINIMUM)	FRONT: 25 FEET REAR: 30 FEET SIDES: 10 FEET	FRONT: 25 FEET REAR: NONE STREET SIDE: 10 FEET INTERIOR SIDES: NONE
(6)	GARAGE DOOR/CARPORT ENTRY SETBACK (MINIMUM)	SAME AS INDIVIDUAL LOT SETBACKS	SAME AS INDIVIDUAL LOT SETBACKS

August 29, 2025 Page 68 of 173

TABLE 610.1 R1-18 DEVELOPMENT STANDARDS			
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)
(7)	PROJECTIONS	PER SECTION 701.A.3.A	PER SECTION 701.A.3.B
(8)	DEVELOPMENT PERIMETER BUILDING SETBACK (MINIMUM)	NONE.	PERIMETER STREET: 20 FEET. OTHER PROPERTY LINE: 15 FEET
(9)	PERIMETER STREET LANDSCAPE SETBACK (MINIMUM)	NONE.	15 FEET, EXCEPT NONE WHERE LOTS FRONT ON PERIMETER STREET. MAY BE PROVIDED AS PART OF THE REQUIRED BUILDING SETBACK.
(10)	BUILDING HEIGHT (MAXIMUM)	2 STORIES AND 30 FEET	2 STORIES AND 30 FEET
(11)	LOT COVERAGE (MAXIMUM)	30%, PLUS AN ADDITIONAL 10% FOR AN ADU AND/OR ATTACHED SHADE STRUCTURES TOTAL: 40%	40% TOTAL FOR DEVELOPMENT
(12)	COMMON OPEN SPACE (MINIMUM)	NONE	5% OF GROSS AREA
(13)	STREET FRONTAGE REQUIREMENT	PUBLIC STREET	PUBLIC STREET OR PRIVATE ACCESSWAY
(14)	OTHER APPLICABLE REGULATIONS:	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; BONUS: SECTION 608.H

Amend Chapter 6, Section 611 (R1-10 Single-Family Residence District) to read as follows:

Section 611. R1-10 Single-Family Residence District

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 69 of 173

B. **District Regulations.** The following tables establishES standards to be used in the R1-10 district. The definitions of terms used in these standards are found in Section 608.I. REFER TO SECTION 608, RESIDENTIAL DISTRICTS, FOR PERMITTED USES AND ADDITIONAL DEVELOPMENT REGULATIONS.

Table 611.A **R1-10 Development Options** Single-Family Detached Development(3) Planned Residential **Standards** Conventional **Development** Minimum lot width 75' minimum 45' minimum (unless approved by either the design advisor or the Design Review Committee for demonstrating enhanced architecture that minimizes the impact of the garage Minimum lot depth None, except None, except 110' adjacent to freeway or 110' adjacent to freeway or arterial arterial 3.0 3.5; 4.5 with bonus **Dwelling** unit density (units/gross acre) Minimum perimeter building setb Front: 15'; Street(2)(front, rear or side): 15' acks (in addition to Rear: 15' (1-story), 20' (2-story); landscape setback); Side: 10' (1-story), 15' (2-story) Property line (rear): 15' (1-story), 20' (2-story); Property line (side): 10' (1story), 15' (2-story)

August 29, 2025 Page 70 of 173

Table 611.A R1-10 Development Options Single-Family Detached Development(3)


Standards Conventional Planned Residential			
Stariuarus	Conventional	Development	
Common landscaped setback adjacent to-perimeter streets (2)	None	15' average, 10' minimum (Does not apply to lots fronting onto perimeter streets)	
Minimum interior building setbacks	Front: 10'; rear: 10'; combined front and rear: 35', street side: 10'; sides: 13' total (3' minimum, unless 0')	Front: 10'; rear: none (established by Building Code); street side: 10'; sides: none (established by Building Code)	
Minimum building separation	10'	None	
Minimum garage setback	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages	
Maximum garage width	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum	
Maximum height	2 stories and 30'	2 stories and 30' (except that 3 stories not exceeding 30' are permitted when approved by the design advisor for demonstrating enhanced architecture)	
Lot coverage	50% plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50% plus an additional 10% for an ADU and/or attached shade structures Total: 60%	
Common areas	None	Minimum 5% of gross area	

August 29, 2025 Page 71 of 173

Table 611.A R1-10 Development Options Single-Family Detached Development⁽³⁾

Single Family Detached Development			
Standards	Conventional	Planned Residential Development	
Allowed development	Single-family detached ⁽³⁾	Single-family detached(3)	
Required review	Development review per Section 507, and subdivision to create 4 or more lots	Development review per Section 507, and subdivision to create 4 or more lots	
Street standards	Public street or private accessway ⁽¹⁾	Public street or private accessway ⁽¹⁾	
Landscape standards		Perimeter common: trees spaced a maximum of 20 to 30 feet on center (based on species) or in equivalent groupings, and 5 shrubs per tree.	

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) For single-family detached development built or subdivided prior to June 2, 1999, refer to the development standards of Table 611.B.

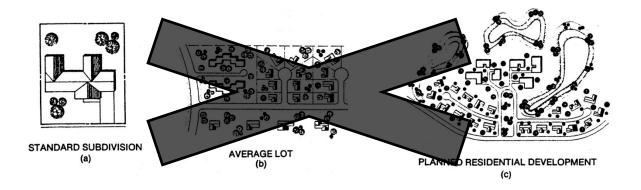

August 29, 2025 Page 72 of 173

Table 611.B

R1-10 Development Options

Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to June 2, 1999)

Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development
Minimum lot dimensions (width and depth)	80' width, 94' depth (Minimum area 10,000 sq. ft.)	60' width, 65' depth	None
Dwelling unit density (units/gross acre)	3.50	3.50	3.68; 4.20 with bonus
Perimeter standards	None	30' front, 25' rear, 10' side	20' adjacent to a public street ⁽²⁾ ; this area is to be in common ownership unless lots front on the perimeter public street; 15' adjacent to property line
Building setbacks	25' front, 25' rear, 10' and 3' side	10' front, 35' front plus rear	10' front
Maximum height	2-stories and 30'	2 stories and 30'	2 stories and 30' for first 150'; 1' in 5' increase to 48' high and 4 stories
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures. Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures.	50%, plus an additional 10% for an ADU and/or attached shade structures. Total: 60%

August 29, 2025 Page 73 of 173

Table 611.B

R1-10 Development Options


Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to June 2, 1999)

Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development
		Total: 60%	
Common areas	None	None	Minimum 5% of gross area
Allowed development	Single-family detached ⁽³⁾ -and duplex	Single-family attached; plus (a)	Multi-family plus (b)
Required review	Subdivision to create 4 or more lots	Subdivision with building setbacks	Site plan per Section 507
Street standards	Public street required	Public street	Public street or private accessway ⁽¹⁾


- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) The only single-family detached developments that the standards of the table apply to are ones built or subdivided prior to June 2, 1999.

ILLUSTRATIONS OF DEVELOPMENT OPTIONS

August 29, 2025 Page 74 of 173







Standard Subdivision

Planned Residential Development

	TABLE 611.1 R1-10 DEVELOPMENT STANDARDS			
CATE	EGORY	(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(1)	LOT WIDTH (MINIMUM)	80 FEET	NONE.	
(2)	LOT DEPTH (MINIMUM)	94 FEET	NONE.	
(3)	DEVELOPMENT DENSITY (MAXIMUM)	3.5 PDU/AC (GROSS)	3.5 PDU/AC (GROSS); 4.5 WITH BONUS	
(4)	SUBDIVIDED LOTS (MAXIMUM)	3.5 LOTS/AC (GROSS)	3.5 LOTS/AC (GROSS); 4.5 WITH BONUS	
(5)	INDIVIDUAL LOT SETBACKS (MINIMUM)	FRONT: 25 FEET REAR: 25 FEET STREET SIDE: 10 FEET INTERIOR SIDES: 10 FEET AND 3 FEET	FRONT: 10 FEET REAR: NONE STREET SIDE: 10 FEET INTERIOR SIDES: NONE	
(6)	GARAGE DOOR/CARPORT ENTRY SETBACK (MINIMUM)	SAME AS INDIVIDUAL LOT SETBACKS.	FRONT: 18 FEET	
(7)	PROJECTIONS	PER SECTION 701.A.3.A	PER SECTION 701.A.3.B	
(8)	DEVELOPMENT PERIMETER BUILDING SETBACK (MINIMUM)	NONE.	PERIMETER STREET: 20 FEET. OTHER PROPERTY LINE: 15 FEET	

August 29, 2025 Page 75 of 173

	TABLE 611.1 R1-10 DEVELOPMENT STANDARDS			
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(9)	PERIMETER STREET LANDSCAPE SETBACK (MINIMUM)	NONE.	15 FEET, EXCEPT NONE ON LOTS WHICH FRONT ON A PERIMETER STREET. MAY BE PROVIDED AS PART OF THE REQUIRED BUILDING SETBACK.	
(10)	BUILDING HEIGHT (MAXIMUM)	2 STORIES AND 30 FEET	3 STORIES AND 30 FEET	
(11)	LOT COVERAGE (MAXIMUM)	50%, PLUS AN ADDITIONAL 10% FOR AN ADU AND/OR ATTACHED SHADE STRUCTURES TOTAL: 60%	60% TOTAL FOR DEVELOPMENT	
(12)	COMMON OPEN SPACE (MINIMUM)	NONE.	5% OF GROSS AREA	
(13)	STREET FRONTAGE REQUIREMENT	PUBLIC STREET	PUBLIC STREET OR PRIVATE ACCESSWAY	
(14)	OTHER APPLICABLE REGULATIONS:	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; BONUS: SECTION 608.H	

Amend Chapter 6, Section 612 (R1-8 Single-Family Residence District) to read as follows:

Section 612. R1-8 Single-Family Residence District

B. **District Regulations.** The following tables establishES standards to be used in the R1-8 district. The definitions of terms used in these standards are found in Section 608.I. REFER TO SECTION 608, RESIDENTIAL DISTRICTS, FOR PERMITTED USES AND ADDITIONAL DEVELOPMENT REGULATIONS.

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 76 of 173

Table 612.A R1-8 Development Options Single-Family Detached Development(3)

<u> </u>	gie-Family Detached Developme	
Standards	Conventional	Planned Residential Development
Minimum lot width	65' minimum	45' minimum (unless approved by either the design advisor or the Design Review Committee for demonstrating enhanced architecture that minimizes the impact of the garage
Minimum lot depth	None, except 110' adjacent to freeway or arterial	None, except 110' adjacent to freeway or arterial
Dwelling unit density (units/gross acre)	4.0	4.5; 5.5 with bonus
Minimum perimeter building setb acks	Front: 15'; Rear: 15' (1-story), 20' (2-story); Side: 10' (1-story), 15' (2-story)	Street ⁽²⁾ (front, rear or side): 15' (in addition to landscape setback); Property line (rear): 15' (1-story), 20' (2-story); Property line (side): 10' (1-story), 15' (2-story)
Common landscaped setback adjacent to- perimeter streets ⁽²⁾	None	15' average, 10' minimum (Does not apply to lots fronting onto perimeter streets)
Minimum interior building setbacks	Front: 10'; rear: 10'; combined front and rear: 35', street side: 10'; sides: 13' total (3' minimum, unless 0')	Front: 10'; rear: none (established by Building Code); street side: 10'; sides: none (established by Building Code)
Minimum building separation	10'	None

August 29, 2025 Page 77 of 173

Table 612.A R1-8 Development Options Single-Family Detached Development(3)


Otan danda	0.0000000000000000000000000000000000000	Planned Residential
Standards	Conventional	Development
Minimum garage setback	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages
Maximum garage width	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum
Maximum height	2 stories and 30'	2 stories and 30' (except that 3 stories not exceeding 30' are permitted when approved by the design advisor for demonstrating enhanced architecture)
Lot coverage	50%, plus additional 10% for an ADU and/or attached shade structures	50%, plus additional 10% for an ADU and/or attached shade structures
	Total: 60%	Total: 60%
Common areas	None	Minimum 5% of gross area
Allowed development	Single-family detached ⁽³⁾	Single-family detached ⁽³⁾
Required review	Development review per Section 507, and subdivision to create 4 or more lots	Development review per Section 507, and subdivision to create 4 or more lots
Street standards	Public street or private accessway ⁽¹⁾	Public street or private accessway ⁽¹⁾
	accessway .	uooosoway .

August 29, 2025 Page 78 of 173

Table 612.A R1-8 Development Options Single-Family Detached Development⁽³⁾

Standards	Conventional	Planned Residential Development
Landscape standards		Perimeter common: trees spaced a maximum of 20' to 30' on center (based on species) or in equivalent groupings, and 5 shrubs per tree.

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) For single-family detached development built or subdivided prior to June 2, 1999, refer to the development standards of Table 612.B.

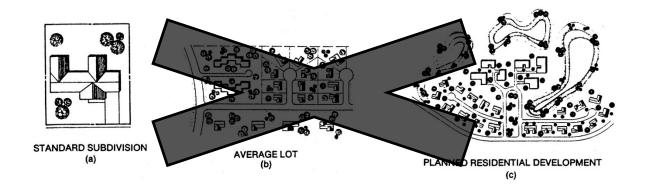

August 29, 2025 Page 79 of 173

Table 612.B R1-8 Development Options Family Attached and Multi-Family Devel

Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to June 2, 1999)

Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development
Minimum lot dimensions (width and depth)	70' width, 94' depth (Minimum area 8,000 sq. ft.)	50' width, 65' depth	None
Dwelling unit density (units/gross acre)	4.30	4.30	4.52; 5.16 with bonus
Perimeter standards	None	25' front or rear 10' side	20' adjacent to a public street ⁽²⁾ ; this area is to be in common ownership unless lots front on the perimeter public street; 15' adjacent to property line
Building setbacks	20' front, 25' rear, 10' and 3' side	10' front, 35' front plus	10' front
Maximum height	2 stories and 30'	2 stories and 30'	2 stories and 30' for first 150'; 1' in 5' increase to 48' high and 4 stories
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%
Common areas	None	None	Minimum 5% of gross area

August 29, 2025 Page 80 of 173

Table 612.B


R1-8 Development Options


Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to June 2, 1999)


Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development
Allowed development	Single- family detached ⁽³⁾ an d-duplex	Single-family attached; plus (a)	Multi-family plus (b)
Required review	Subdivision to create 4 or more lots	Subdivision with building setbacks	Site plan per Section 507
Street standards	Public street required	Public street	Public street or private accessway ⁽¹⁾

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) The only single-family detached developments that the standards of the table apply to are ones built or subdivided prior to June 2, 1999.


ILLUSTRATIONS OF DEVELOPMENT OPTIONS







Standard Subdivision



Planned Residential Development

August 29, 2025 Page 81 of 173

	TABLE 612.1 R1-8 DEVELOPMENT STANDARDS			
CATE	EGORY	(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(1)	LOT WIDTH (MINIMUM)	70 FEET	NONE.	
(2)	LOT DEPTH (MINIMUM)	94 FEET	NONE.	
(3)	DEVELOPMENT DENSITY (MAXIMUM)	4.5 PDU/AC (GROSS)	4.5 PDU/AC (GROSS); 5.5 WITH BONUS	
(4)	SUBDIVIDED LOTS (MAXIMUM)	4.5 LOTS/AC (GROSS)	4.5 LOTS/AC (GROSS); 5.5 WITH BONUS	
(5)	INDIVIDUAL LOT SETBACKS (MINIMUM)	FRONT: 20 FEET REAR: 25 FEET STREET SIDE: 10 FEET INTERIOR SIDES: 10 FEET AND 3 FEET	FRONT: 10 FEET REAR: NONE STREET SIDE: 10 FEET INTERIOR SIDES: NONE	
(6)	GARAGE DOOR/CARPORT ENTRY SETBACK (MINIMUM)	SAME AS INDIVIDUAL LOT SETBACKS.	FRONT: 18 FEET	
(7)	PROJECTIONS	PER SECTION 701.A.3.A	PER SECTION 701.A.3.B	
(8)	DEVELOPMENT PERIMETER BUILDING SETBACK (MINIMUM)	NONE.	PERIMETER STREET: 20 FEET. OTHER PROPERTY LINE: 15 FEET	
(9)	PERIMETER STREET LANDSCAPE SETBACK (MINIMUM)	NONE.	15 FEET, EXCEPT NONE WHERE LOTS FRONT ON PERIMETER STREET. MAY BE PROVIDED AS PART OF THE REQUIRED BUILDING SETBACK.	
(10)	BUILDING HEIGHT (MAXIMUM)	2 STORIES AND 30 FEET	3 STORIES AND 30 FEET	

August 29, 2025 Page 82 of 173

	TABLE 612.1 R1-8 DEVELOPMENT STANDARDS			
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(11)	LOT COVERAGE (MAXIMUM)	50%, PLUS AN ADDITIONAL 10% FOR AN ADU AND/OR ATTACHED SHADE STRUCTURES TOTAL: 60%	60% TOTAL FOR DEVELOPMENT	
(12)	COMMON OPEN SPACE (MINIMUM)	NONE.	5% OF GROSS AREA	
(13)	STREET FRONTAGE REQUIREMENT	PUBLIC STREET	PUBLIC STREET OR PRIVATE ACCESSWAY	
(14)	OTHER APPLICABLE REGULATIONS:	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; BONUS: SECTION 608.H	

Amend Chapter 6, Section 613 (R1-6 Single-Family Residence District) to read as follows:

Section 613. R1-6 Single-Family Residence District

B. **District Regulations.** The following tables establishES standards to be used in the R1-6 district. The definitions of terms used in these standards are found in Section 608.I. REFER TO SECTION 608, RESIDENTIAL DISTRICTS, FOR PERMITTED USES AND ADDITIONAL DEVELOPMENT REGULATIONS.

August 29, 2025 Page 83 of 173

Table 613.A R1-6 Development Options Single-Family Detached Development(3)

Standards	Conventional	Planned Residential Development
Minimum lot width	55' minimum	45' minimum (unless approved by either the design advisor or the Design Review Committee for demonstrating enhanced architecture that minimizes the impact of the garage
Minimum lot depth	None, except 110' adjacent to freeway or arterial	None, except 110' adjacent to freeway or arterial
Dwelling unit density (units/gross acre)	5.0	5.5; 6.5 with bonus
Minimum perimeter building setb acks	Front: 15'; Rear: 15' (1-story), 20' (2-story); Side: 10' (1-story), 15' (2-story)	Street ⁽²⁾ (front, rear or side): 15' (in addition to landscape setback); Property line (rear): 15' (1-story), 20' (2-story); Property line (side): 10' (1-story), 15' (2-story)
Common landscaped setback adjacent to-perimeter streets(2)	None	15' average, 10' minimum(Does not apply to lots fronting onto perimeter streets)
Minimum interior building setbacks	Front: 10'; rear: 10'; combined front and rear: 35', street side: 10'; sides: 13' total (3' minimum, unless 0')	Front: 10'; rear: none (established by Building Code); street side: 10'; sides: none (established by Building Code)
Minimum building separation	10'	None

August 29, 2025 Page 84 of 173

Table 613.A R1-6 Development Options Single-Family Detached Development(3)


Single-Family Detached Development ™			
Standards	Conventional	Planned Residential Development	
Minimum garage setback	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages	
Maximum garage width	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum	
Maximum height	2 stories and 30'	2 stories and 30' (except that 3 stories not exceeding 30' are permitted when approved by the design advisor for demonstrating enhanced architecture)	
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures	50%, plus an additional 10% for an ADU and/or attached shade structures	
	Total: 60%	Total: 60%	
Common areas	None	Minimum 5% of gross area	
Allowed development	Single-family detached(3)	Single-family detached(3)	
Required review	Development review per Section 507, and subdivision to create 4 or more lots	Development review per Section 507, and subdivision to create 4 or more lots	
Street standards	Public street or private accessway ⁽¹⁾	Public street or private accessway ⁽¹⁾	
		<u>l</u>	

August 29, 2025 Page 85 of 173

Table 613.A R1-6 Development Options Single-Family Detached Development(3)

Standards	Conventional	Planned Residential Development
Landscape standards		Perimeter common: trees spaced a maximum of 20' to 30' on center (based on species) or in equivalent groupings, and 5 shrubs per tree.

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) For single-family detached development built or subdivided prior to May 1, 1998, refer to the development standards of Table 613.B.



August 29, 2025 Page 86 of 173

Table 613.B R1-6 Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)

Standards	Subdivision	Average Lot	Planned Residential Development
Minimum lot dimensions (width and depth)	60' width, 94' depth (Minimum area 6,000 sq. ft.)	40' width, 60' depth	None
Dwelling unit density (units/gross acre)	5.30	5.30	5.54; 6.34 with bonus
Perimeter standards	None	25' front or rear 10' side	20' adjacent to a public street(2); this area is to be in common ownership unless lots front on the perimeter public street; 15' adjacent to property line
Building setbacks	20' front, 25' rear, 10' and 3' side	10' front, 35' front plus rear	10' front
Maximum height	2 stories and 30'	2 stories and 30'	2 stories and 30' for first 150'; 1' in 5' increase to 48' high and 4 stories
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%
Common areas	None	None	Minimum 5% of gross area


August 29, 2025 Page 87 of 173

Table 613.B R1-6 Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)


Standards	Subdivision	Average Lot	Planned Residential Development
Allowed development	Single-family detached ⁽³⁾ and duplex	Single-family attached plus (a)	Multi-family plus (b)
Required review	Subdivision to create 4 or more lots	Subdivision with building setbacks	Development review per Section 507
Street standards	Public street required	Public street	Public street or private accessway ⁽¹⁾

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) The only single-family detached developments that the standards of the table apply to are ones built or subdivided prior to May 1, 1998.


ILLUSTRATIONS OF DEVELOPMENT OPTIONS







Standard Subdivision



Planned Residential Development

August 29, 2025 Page 88 of 173

	TABLE 613.1 R1-6 DEVELOPMENT STANDARDS				
CATE	EGORY	(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)		
(1)	LOT WIDTH (MINIMUM)	60 FEET	NONE.		
(2)	LOT DEPTH (MINIMUM)	94 FEET	NONE.		
(3)	DEVELOPMENT DENSITY (MAXIMUM)	5.5 PDU/AC (GROSS)	5.5 PDU/AC (GROSS); 6.5 WITH BONUS		
(4)	SUBDIVIDED LOTS (MAXIMUM)	5.5 LOTS/AC (GROSS)	5.5 LOTS/AC (GROSS); 6.5 WITH BONUS		
(5)	INDIVIDUAL LOT SETBACKS (MINIMUM)	FRONT: 20 FEET REAR: 25 FEET STREET SIDE: 10 FEET INTERIOR SIDES: 10 FEET AND 3 FEET	FRONT: 10 FEET REAR: NONE STREET SIDE: 10 FEET INTERIOR SIDES: NONE		
(6)	GARAGE DOOR/CARPORT ENTRY SETBACK (MINIMUM)	SAME AS INDIVIDUAL LOT SETBACKS	FRONT: 18 FEET		
(7)	PROJECTIONS	PER SECTION 701.A.3.A	PER SECTION 701.A.3.B		
(8)	DEVELOPMENT PERIMETER BUILDING SETBACK (MINIMUM)	NONE.	PERIMETER STREET: 20 FEET. OTHER PROPERTY LINE: 15 FEET		
(9)	PERIMETER STREET LANDSCAPE SETBACK (MINIMUM)	NONE.	15 FEET, EXCEPT NONE ON LOTS WHICH FRONT ON A PERIMETER STREET. MAY BE PROVIDED AS PART OF THE REQUIRED BUILDING SETBACK.		
(10)	BUILDING HEIGHT (MAXIMUM)	2 STORIES AND 30 FEET	3 STORIES AND 30 FEET		

August 29, 2025 Page 89 of 173

	TABLE 613.1 R1-6 DEVELOPMENT STANDARDS			
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(11)	LOT COVERAGE (MAXIMUM)	50%, PLUS AN ADDITIONAL 10% FOR AN ADU AND/OR ATTACHED SHADE STRUCTURES TOTAL: 60%	60% TOTAL FOR DEVELOPMENT	
(12)	COMMON OPEN SPACE (MINIMUM)	NONE.	5% OF GROSS AREA	
(13)	STREET FRONTAGE REQUIREMENT	PUBLIC STREET	PUBLIC STREET OR PRIVATE ACCESSWAY	
(14)	OTHER APPLICABLE REGULATIONS:	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; BONUS: SECTION 608.H	

Amend Chapter 6, Section 614 (R-2 Multi-Family Residence District) to read as follows:

Section 614. R-2 Multifamily MULTI-FAMILY Residence District

August 29, 2025 Page 90 of 173

A. Purpose. The purpose of the multi-family residence districts is to provide for alternate living styles including rental, condominiums and single ownership of land with multiple units thereon or single or attached townhomes.

The density ranges offered are intended to allow for a greater interaction of residents with at least the opportunity for less individual maintenance, unit cost, and size as compared with a conventional single-family residence.

The TWO-design DEVELOPMENT options, of average lot subdivision, STANDARD and planned residential DEVELOPMENT, and single-family attached development are intended to provide flexibility as to unit placement, variable yard requirements, more reasonable and practical use of open spaces, staggered height limits up to three and four stories and more standardized parking and street improvement requirements. Bonus provisions are intended to facilitate and enhance the utilization of smaller infill parcels as well as unusual and irregular parcels throughout the City.

Along with the freedom that the multi-family district offers are certain responsibilities which must be met for project residents, but more importantly for the overall adjacent neighborhood. These are expressed in terms of standards and performance criteria. The standards internal to a project are intended to increase livability with amenities including landscaping, recreational facilities and project design. On the other hand the exterior standards provide a better fit, [and] better the project and the neighborhood environs. Criteria relating to setbacks, screening and landscaping are intended to reduce noise, maintain privacy and minimize psychological feelings to a change in development character and avoid any adverse effect on property values.

B. **District Regulations.** The following tables establishES standards to be used in the R-2 district. The definitions of terms used in these standards are found in Section 608.I. The single family infill development option must meet Section 608.F.6 requirements. REFER TO SECTION 608, RESIDENTIAL DISTRICTS, FOR PERMITTED USES AND ADDITIONAL DEVELOPMENT REGULATIONS.

August 29, 2025 Page 91 of 173

Table 614.A R-2 Development Options Single-Family Detached Development(3)

Standards	Conventional	Planned Residential Development
Minimum lot width	55' minimum	45' minimum (unless approved by either the design advisor or the Design Review Committee for demonstrating enhanced architecture that minimizes the impact of the garage
Minimum lot depth	None, except 110' adjacent to freeway or arterial	None, except 110' adjacent to freeway or arterial
Dwelling unit density (units/gross acre)	5.0	6.5; 12 with bonus
Minimum perimeter building setb acks	Front: 15'; Rear: 15' (1-story), 20' (2-story); Side: 10' (1-story), 15' (2-story)	Street ⁽²⁾ (front, rear or side): 15' (in addition to landscape setback); Property line (rear): 15' (1-story), 20' (2-story); Property line (side): 10' (1-story), 15' (2-story)
Common landscaped setback adjacent to perimeter streets(2)	None	15' average, 10' minimum (Does not apply to lots fronting onto perimeter streets)
Minimum interior building setbacks	Front: 10'; rear: 10'; combined front and rear: 35', street side: 10'; sides: 13' total (3' minimum, unless 0')	Front: 10'; rear: none (established by Building Code); street side: 10'; sides: none (established by Building Code)
Minimum building separation	10'	None

August 29, 2025 Page 92 of 173

Table 614.A R-2 Development Options Single-Family Detached Development(3)


Single-Family Detached Development ^{co}			
Standards	Conventional	Planned Residential Development	
Minimum garage setback	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages	
Maximum garage width	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum	
Maximum height	2 stories and 30'	2 stories and 30' (except that 3 stories not exceeding 30' are permitted when approved by the design advisor for demonstrating enhanced architecture)	
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures	50%, plus an additional 10% for an ADU and/or attached shade structures	
	Total: 60%	Total: 60%	
Common areas	None	Minimum 5% of gross area	
Allowed development	Single-family detached(3)	Single-family detached ⁽³⁾	
Required review	Development review per Section 507, and subdivision to create 4 or more lots	Development review per Section 507, and subdivision to create 4 or more lots	
Street standards	Public street or private accessway ⁽¹⁾	Public street or private accessway ⁽¹⁾	

August 29, 2025 Page 93 of 173

Table 614.A R-2 Development Options Single-Family Detached Development (3)

Standards	Conventional	Planned Residential Development
Landscape standards		Perimeter common: trees spaced a maximum of 20' to 30' on center (based on species) or in equivalent groupings, and 5 shrubs per tree.

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) For single-family detached development built or subdivided prior to May 1, 1998, refer to the development standards of Table 614.B.

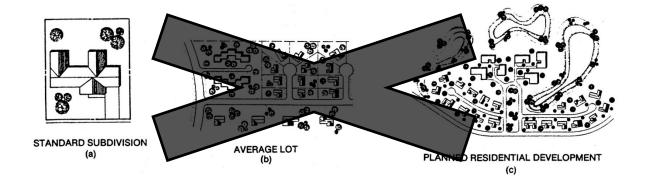

August 29, 2025 Page 94 of 173

Table 614.B R-2 Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)

Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	(d) Single-Family Infill ⁽⁴⁾
Minimum lot dimensions (width and depth)	60' width, 94' depth (Minimum area 6,000 sq. ft.)	40' width, 60' depth	None	Development site: none. Individual dwelling lot: 20'.
Dwelling unit density (units/gross acre)	10.0	10.0	10.50; 12.00 with bonus	10.50; 12.00 with bonus
Perimeter standards	None	25' front or rear 10' side	20' adjacent to a public street(2); this area is to be in common ownership unless lots front on the perimeter public street; 15' adjacent to property line	10' for units fronting street rights of way; 15' for units siding street rights of way. This area is to be in common ownership or management. 10' adjacent to property line
Building setbacks	20' front, 25' rear, 10' and 3' side	10' front, 35' front plus rear	10' front	Individual unit lot:
Maximum height	2 stories and 30'	2 stories and 30'	2 stories and 30' for first 150'; 1' in 5' increase to 48' high and 4 stories	3 stories or 40' for first 150'; 1' in 1' increase to 48' height, 4-story maximum(5)

August 29, 2025 Page 95 of 173

Table 614.B R-2 Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)

Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	(d) Single-Family Infill ⁽⁴⁾
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	100% for each individual lot. 50% for other parcels or tracts with accessory structures
Common areas	None	None	Minimum 5% of gross area	Minimum 5% of gross area
Allowed development	Single-family detached ⁽³⁾ -and duplex	Single-family attached plus (a)	Multi-family plus	Single-family attached and single-family detached (per the provisions of Section 608.F.6 only)
Required review	Subdivision to create 4 or more lots	Subdivision with building setbacks	Development review per Section <u>507</u>	Development review per Section 507


August 29, 2025 Page 96 of 173

Table 614.B R-2 Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)


Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	(d) Single-Family Infill ⁽⁴⁾
Street standards	Public street required	Public street	Public street or private accessway(1)	Development site: public street, public alley, or private accessway. Individual unit lot: private accessway, or private drive(1)


- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) The only single-family detached developments that the standards of the table apply to are ones built or subdivided prior to May 1, 1998.
- (4) The single-family infill development option must comply with the additional development regulations provided in Section 608.F.6.
- (5) There shall be a 15-foot maximum height within ten feet of a single-family zoned district, which height may be increased one foot for each additional one foot of building setback to the maximum permitted height.

August 29, 2025 Page 97 of 173

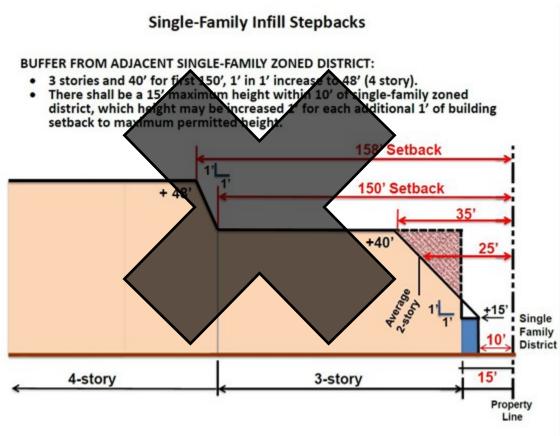

ILLUSTRATIONS OF DEVELOPMENT OPTIONS







Standard Option

Standard Subdivision

Planned Residential Development

TABLE 614.1 R-2 DEVELOPMENT STANDARDS			
CATE	CATEGORY (A) STANDARD OPTION		(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)
(1)	LOT WIDTH (MINIMUM)	60 FEET	NONE

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 98 of 173

TABLE 614.1 R-2 DEVELOPMENT STANDARDS				
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(2)	LOT DEPTH (MINIMUM)	94 FEET	NONE	
(3)	DEVELOPMENT DENSITY (MAXIMUM)	10.0 PDU/AC (GROSS)	10.5 PDU/AC (GROSS); 12.0 WITH BONUS	
(4)	SUBDIVIDED LOTS (MAXIMUM)	10.0 LOTS/AC (GROSS)	10.5 LOTS/AC (GROSS); 12.0 WITH BONUS	
(5)	INDIVIDUAL LOT SETBACKS (MINIMUM)	FRONT: 20 FEET REAR: 25 FEET STREET SIDE: 10 FEET INTERIOR SIDES: 10 FEET AND 3 FEET	FRONT: 10 FEET REAR: NONE STREET SIDE: 10 FEET INTERIOR SIDES: NONE	
(6)	GARAGE DOOR/CARPORT ENTRY SETBACK (MINIMUM)	SAME AS INDIVIDUAL LOT SETBACKS.	18 FEET FRONT OR STREET SIDE	
(7)	PROJECTIONS	PER SECTION 701.A.3.A	PER SECTION 701.A.3.B	
(8)	DEVELOPMENT PERIMETER BUILDING SETBACK (MINIMUM)	NONE	PERIMETER STREET: 20 FEET. OTHER PROPERTY LINE: 15 FEET	
(9)	PERIMETER STREET LANDSCAPE SETBACK (MINIMUM)	NONE	15 FEET, EXCEPT NONE ON LOTS WHICH FRONT ON A PERIMETER STREET. MAY BE PROVIDED AS PART OF THE REQUIRED BUILDING SETBACK.	

August 29, 2025 Page 99 of 173

TABLE 614.1 R-2 DEVELOPMENT STANDARDS				
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(10)	BUILDING HEIGHT (MAXIMUM)	2 STORIES AND 30 FEET**	3 STORIES AND 30 FEET FOR FIRST 150 FEET FROM DEVELOPMENT PERIMETER; ONE FOOT HEIGHT INCREASE FOR EACH FIVE FEET IN SETBACK INCREASE TO MAXIMUM 4 STORIES AND 48 FEET HIGH**	
(11)	LOT COVERAGE (MAXIMUM)	50%, PLUS AN ADDITIONAL 10% FOR AN ADU AND/OR ATTACHED SHADE STRUCTURES TOTAL: 60%	60% TOTAL FOR DEVELOPMENT	
(12)	COMMON OPEN SPACE (MINIMUM)	NONE	5% OF GROSS AREA	
(13)	STREET FRONTAGE REQUIREMENT	PUBLIC STREET	PUBLIC STREET OR PRIVATE ACCESSWAY	
(14) OTHER APPLICABLE REGULATIONS:		SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; MULTI-FAMILY: SECTION 703.B	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; MULTI-FAMILY: SECTION 703.B BONUS: SECTION 608.H; SFI SUBDIVISIONS: SECTION 608.I	

^{**} THERE SHALL BE A 15-FOOT MAXIMUM HEIGHT WITHIN TEN FEET OF A SINGLE-FAMILY ZONED DISTRICT, WHICH HEIGHT MAY BE INCREASED ONE FOOT FOR EACH ADDITIONAL ONE FOOT OF BUILDING SETBACK TO THE MAXIMUM PERMITTED HEIGHT.

Amend Chapter 6, Section 615 (R-3 Multi-Family Residence District) to read as follows:

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 100 of 173

Section 615. R-3 Multifamily MULTI-FAMILY Residence District

A. Purpose. The purpose of the multi-family residence districts is to provide for alternate living styles including rental, condominiums and single ownership of land with multiple units thereon or single or attached townhomes.

The density ranges offered are intended to allow for a greater interaction of residents with at least the opportunity for less individual maintenance, unit cost, and size as compared with a conventional single-family residence.

The TWO-design DEVELOPMENT options, of average lot subdivision, STANDARD and planned residential DEVELOPMENT, and single-family attached development are intended to provide flexibility as to unit placement, variable yard requirements, more reasonable and practical use of open spaces, staggered height limits up to three and four stories and more standardized parking and street improvement requirements. Bonus provisions are intended to facilitate and enhance the utilization of smaller infill parcels as well as unusual and irregular parcels throughout the City.

Along with the freedom that the multi-family district offers are certain responsibilities which must be met for project residents, but more importantly for the overall adjacent neighborhood. These are expressed in terms of standards and performance criteria. The standards internal to a project are intended to increase livability with amenities including landscaping, recreational facilities and project design. On the other hand the exterior standards provide a better fit, [and] better the project and the neighborhood environs. Criteria relating to setbacks, screening and landscaping are intended to reduce noise, maintain privacy and minimize psychological feelings to a change in development character and avoid any adverse effect on property values.

B. **District Regulations.** The following tables establishES standards to be used in the R-3 district. The definitions of terms used in these standards are found in Section 608.I. The single-family infill development option must meet Section 608.F.6 requirements. REFER TO SECTION 608, RESIDENTIAL DISTRICTS, FOR PERMITTED USES AND ADDITIONAL DEVELOPMENT REGULATIONS.

August 29, 2025 Page 101 of 173

Table 615.A R-3 Development Options Single-Family Detached Development(3)

Standards	Conventional	Planned Residential Development 45' minimum (unless approved by either the design advisor or the Design Review Committee for demonstrating enhanced architecture that minimizes the impact of the garage	
Minimum lot width	55' minimum		
Minimum lot depth	None, except 110' adjacent to freeway or arterial	None, except 110' adjacent to freeway or arterial	
Dwelling unit density (units/gross acre)	5.0	6.5; 12 with bonus	
Minimum perimeter building setb acks	Front: 15'; Rear: 15' (1-story), 20' (2-story); Side: 10' (1-story), 15' (2-story)	Street ⁽²⁾ (front, rear or side): 15' (in addition to landscape setback); Property line (rear): 15' (1-story), 20' (2-story); Property line (side): 10' (1-story), 15' (2-story)	
Common landscaped setback adjacent to-perimeter streets ⁽²⁾	None	15' average, 10' minimum (Does not apply to lots fronting onto perimeter streets)	
Minimum interior building setbacks	Front: 10'; rear: 10'; combined front and rear: 35', street side: 10'; sides: 13' total (3' minimum, unless 0')	Front: 10'; rear: none (established by Building Code); street side: 10'; sides: none (established by Building Code)	
Minimum building separation	10'	None	

August 29, 2025 Page 102 of 173

Table 615.A R-3 Development Options Single-Family Detached Development(3)

Ongle Fulling Between Bevelopment				
Standards	Conventional	Planned Residential Development		
Minimum garage setback	18' from back of sidewalk for front-loaded garages, 10' from property line for side loaded garages	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages		
Maximum garage width	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum		
Maximum height	2 stories and 30'	2 stories and 30' (except that 3 stories not exceeding 30' are permitted when approved by the design advisor for demonstrating enhanced architecture)		
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures		
Common areas	None	Minimum 5% of gross area		
Allowed development	Single-family detached ⁽³⁾	Single-family detached ⁽³⁾		
Required review	Development review per Section 507, and subdivision to create 4 or more lots	Development review per Section 507, and subdivision to create 4 or more lots		
Street standards	Public street or private accessway ⁽¹⁾	Public street or private accessway ⁽¹⁾		

August 29, 2025 Page 103 of 173

Standards

Landscape standards


Table 615.A R-3 Development Options Single-Family Detached Development(3) Conventional Planned Residential Development

Perimeter common: trees spaced a maximum of 20' to 30' on center (based on species) or in equivalent groupings, and 5

shrubs per tree.

Public streets may be required as a part of subdivision or development review for extensions of
street patterns, for circulation within neighborhoods, or to continue partial dedications.

- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) For single-family detached development built or subdivided prior to May 1, 1998, refer to the development standards of Table 615.B.

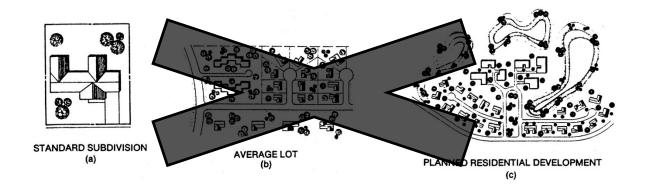

August 29, 2025 Page 104 of 173

Table 615.B R-3 Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)

Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	(d) Single-Family Infill ⁽⁴⁾
Minimum lot dimensions (width and depth)	60' width, 94' depth (Minimum area 6,000 sq. ft.)	40' width, 60' depth	None	Development site: none. Individual dwelling lot: 20'.
Dwelling unit density (units/gross acre)	14.5	14.5	15.23; 17.40 with bonus	15.23; 17.40 with bonus
Perimeter standards	None	20' front, 15' rear, 10' side	20' adjacent to a public street; this area is to be in common ownership unless lots front on the perimeter public street ⁽²⁾ ; 15' adjacent to property line	10' for units fronting street rights-of-way; 15' for units siding street rights-of- way. This area is to be in common ownership or management. 10' adjacent to property line
Building setbacks	25' front, 15' rear, 10' and 3' side	10' front, 30' front plus rear	10' front	Individual unit lot:
Maximum height	2 stories and 30'(5)	2 stories and 30'(5)	2 stories and 30' for first 150'; 1' in 5' increase to 48' height, 4-story maximum ⁽⁵⁾	3 stories or 40' for first 150'; 1' in 1' increase to 48' height, 4-story maximum ⁽⁵⁾
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	100% for each individual lot. 50% for other parcels or tracts with accessory structures
Common areas	None	None	Minimum 5% of gross area	Minimum 5% of gross area


August 29, 2025 Page 105 of 173

Table 615.B R-3 Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)


Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	(d) Single-Family Infill ⁽⁴⁾
Allowed development	Single-family detached ⁽³⁾ , single-family attached and multi-family	Single-family detached ⁽³⁾ , single-family attached and multi-family	Single-family detached ⁽³⁾ , single-family attached and multi-family	Single-family attached and single-family detached (per the provisions of Section 608.F.6 only)
Required review	Subdivision to create 4 or more lots	Subdivision with building setbacks	Development review per Section 507	Development review per Section 507
Street standards	Public street required	Public street	Public street or private accessway(1)	Development site: public street, public alley, or private accessway. Individual unit lot: private accessway, or private drive(1)

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) The only single family detached developments that the standards of the table apply to are ones built or subdivided prior to May 1, 1998.
- (4) The single-family infill development option must comply with the additional development regulations provided in Section 608.F.6.
- (5) There shall be a 15-foot maximum height within ten feet of a single-family zoned district, which height may be increased one foot for each additional one foot of building setback to the maximum permitted height.


August 29, 2025 Page 106 of 173

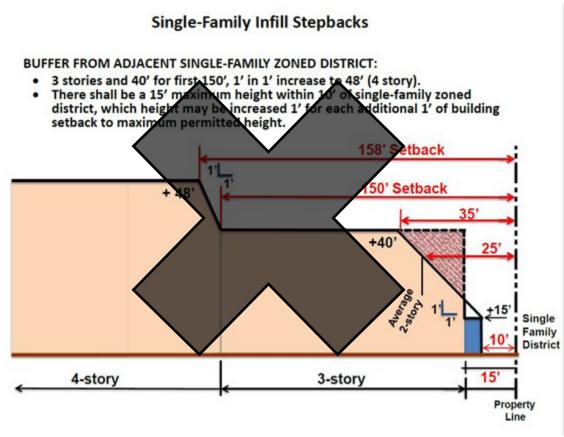

ILLUSTRATIONS OF DEVELOPMENT OPTIONS







Standard Option

Standard Subdivision

Planned Residential Development

TABLE 615.1 R-3 DEVELOPMENT STANDARDS			
CATEGORY		(A) STANDARD OPTION (B) PLANNED RESIDENT DEVELOPMENT (PR	
(1) LOT WIDTH (MINIMUM)		60 FEET	NONE

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 107 of 173

TABLE 615.1 R-3 DEVELOPMENT STANDARDS				
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(2)	LOT DEPTH (MINIMUM)	94 FEET	NONE	
(3)	DEVELOPMENT DENSITY (MAXIMUM)	14.5 PDU/AC (GROSS)	15.5 PDU/AC (GROSS); 17.5 WITH BONUS	
(4)	SUBDIVIDED LOTS (MAXIMUM)	14.5 LOTS/AC (GROSS)	15.5 LOTS/AC (GROSS); 17.5 WITH BONUS	
(5)	INDIVIDUAL LOT SETBACKS (MINIMUM)	FRONT: 25 FEET REAR: 15 FEET STREET SIDE: 10 FEET INTERIOR SIDES: 10 FEET AND 3 FEET	FRONT: 10 FEET REAR: NONE STREET SIDE: 10 FEET INTERIOR SIDES: NONE	
(6)	GARAGE DOOR/CARPORT ENTRY SETBACK (MINIMUM)	SAME AS INDIVIDUAL LOT SETBACKS.	FRONT: 18 FEET	
(7)	PROJECTIONS	PER SECTION 701.A.3.A	PER SECTION 701.A.3.B	
(8)	DEVELOPMENT PERIMETER BUILDING SETBACK (MINIMUM)	NONE	PERIMETER STREET: 20 FEET. OTHER PROPERTY LINE: 15 FEET	
(9)	PERIMETER STREET LANDSCAPE SETBACK (MINIMUM)	NONE	15 FEET, EXCEPT NONE ON LOTS WHICH FRONT ON A PERIMETER STREET. MAY BE PROVIDED AS PART OF THE REQUIRED BUILDING SETBACK.	

August 29, 2025 Page 108 of 173

TABLE 615.1 R-3 DEVELOPMENT STANDARDS				
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(10)	BUILDING HEIGHT (MAXIMUM)	2 STORIES AND 30 FEET**	3 STORIES AND 30 FEET FOR FIRST 150 FEET FROM DEVELOPMENT PERIMETER; ONE FOOT HEIGHT INCREASE FOR EACH FIVE FEET IN SETBACK INCREASE TO MAXIMUM 4 STORIES AND 48 FEET HIGH**	
(11)	LOT COVERAGE (MAXIMUM)	50%, PLUS AN ADDITIONAL 10% FOR AN ADU AND/OR ATTACHED SHADE STRUCTURES TOTAL: 60%	60% TOTAL FOR DEVELOPMENT	
(12)	COMMON OPEN SPACE (MINIMUM)	NONE	5% OF GROSS AREA	
(13)	STREET FRONTAGE REQUIREMENT	PUBLIC STREET	PUBLIC STREET OR PRIVATE ACCESSWAY	
(14)	OTHER APPLICABLE REGULATIONS:	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; MULTI-FAMILY: SECTION 703.B	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; MULTI-FAMILY: SECTION 703.B BONUS: SECTION 608.H; SFI SUBDIVISIONS: SECTION 608.I	

^{**} THERE SHALL BE A 15-FOOT MAXIMUM HEIGHT WITHIN TEN FEET OF A SINGLE-FAMILY ZONED DISTRICT, WHICH HEIGHT MAY BE INCREASED ONE FOOT FOR EACH ADDITIONAL ONE FOOT OF BUILDING SETBACK TO THE MAXIMUM PERMITTED HEIGHT.

Amend Chapter 6, Section 616 (R-3A Multi-Family Residence District) to read as follows:

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 109 of 173

Section 616. R-3A Multifamily MULTI-FAMILY Residence District

A. Purpose. The purpose of the multi-family residence districts is to provide for alternate living styles including rental, condominiums and single ownership of land with multiple units thereon or single or attached townhomes.

The density ranges offered are intended to allow for a greater interaction of residents with at least the opportunity for less individual maintenance, unit cost, and size as compared with a conventional single-family residence.

The TWO-design DEVELOPMENT options, of average lot subdivision, STANDARD and planned residential DEVELOPMENT, and single-family attached development are intended to provide flexibility as to unit placement, variable yard requirements, more reasonable and practical use of open spaces, staggered height limits up to three and four stories and more standardized parking and street improvement requirements. Bonus provisions are intended to facilitate and enhance the utilization of smaller infill parcels as well as unusual and irregular parcels throughout the City.

Along with the freedom that the multi-family district offers are certain responsibilities which must be met for project residents, but more importantly for the overall adjacent neighborhood. These are expressed in terms of standards and performance criteria. The standards internal to a project are intended to increase livability with amenities including landscaping, recreational facilities and project design. On the other hand the exterior standards provide a better fit, [and] better the project and the neighborhood environs. Criteria relating to setbacks, screening and landscaping are intended to reduce noise, maintain privacy and minimize psychological feelings to a change in development character and avoid any adverse effect on property values.

B. **District Regulations.** The following tables establishES standards to be used in the R-3A district. The definitions of terms used in these standards are found in Section 608.I. The single-family infill development option must meet Section 608.F.6 requirements. REFER TO SECTION 608, RESIDENTIAL DISTRICTS, FOR PERMITTED USES AND ADDITIONAL DEVELOPMENT REGULATIONS.

August 29, 2025 Page 110 of 173

Table 616.A R-3A Development Options Single-Family Detached Development(3)

Single-Family Detached Development ⁽³⁾			
Standards	Conventional	Planned Residential Development	
Minimum lot width	55' minimum	45' minimum (unless approved by either the design advisor or the Design Review Committee for demonstrating enhanced architecture that minimizes the impact of the garage	
Minimum lot depth	None, except 110' adjacent to freeway or arterial	None, except 110' adjacent to freeway or arterial	
Dwelling unit density (units/gross acre)	5.0	6.5; 12 with bonus	
Minimum perimeter building setb acks	Front: 15'; Rear: 15' (1-story), 20' (2-story); Side: 10' (1-story), 15' (2-story)	Street ⁽²⁾ -(front, rear or side): 15' (in addition to landscape setback); Property line (rear): 15' (1-story), 20' (2-story); Property line (side): 10' (1-story), 15' (2-story)	
Common landscaped setback adjacent to- perimeter streets ⁽²⁾	None	15' average, 10' minimum (Does not apply to lots fronting onto perimeter streets)	
Minimum interior building setbacks	Front: 10'; rear: 10'; combined front and rear: 35', street side: 10'; sides: 13' total (3' minimum, unless 0')	Front: 10'; rear: none (established by Building Code); street side: 10'; sides: none (established by Building Code)	
Minimum building separation	10'	None	

August 29, 2025 Page 111 of 173

Table 616.A R-3A Development Options Single-Family Detached Development(3)


Standards	Conventional	Planned Residential
Standards	Conventional	Development
Minimum garage setback	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages
Maximum garage width	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum
Maximum height	2 stories and 30'	2 stories and 30' (except that 3 stories not exceeding 30' are permitted when approved by the design advisor for demonstrating enhanced architecture)
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures
Common areas	None	Minimum 5% of gross area
Allowed development	Single-family detached ⁽³⁾	Single-family detached(3)
Required review	Development review per Section 507, and subdivision to create 4 or more lots	Development review per Section 507, and subdivision to create 4 or more lots
Street standards	Public street or private accessway(1)	Public street or private accessway ⁽¹⁾

August 29, 2025 Page 112 of 173

Table 616.A R-3A Development Options Single-Family Detached Development (3)

Standards	Conventional	Planned Residential Development
Landscape standards		Perimeter common: trees spaced a maximum of 20' to 30' on center (based on species) or in equivalent groupings, and 5 shrubs per tree.

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) For single-family detached development built or subdivided prior to May 1, 1998, refer to the development standards of Table 616.B.

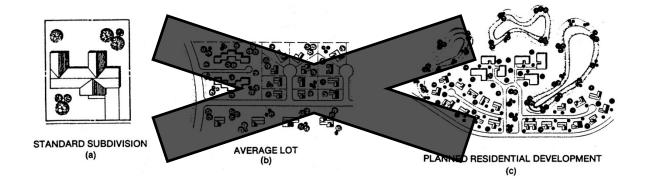

August 29, 2025 Page 113 of 173

Table 616.B R-3A Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)

Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	(d) Single-Family Infill ⁽⁴⁾
Minimum lot dimensions (width and depth)	60' width, 94' depth (Minimum area 6,000 sq. ft.)	40' width, 60' depth	None	Development site: none. Individual dwelling lot: 20'.
Dwelling unit density (units/gross acre)	22	22	23.1; 26.4 with bonus	23.1; 26.4 with bonus
Perimeter standards	None	20' front, 15' rear, 10' side	20' adjacent to a public street; this area is to be in common ownership unless lots front on the perimeter public street ⁽²⁾ ; 15' adjacent to property line	10' for units fronting street rights-of-way; 15' for units siding street rights-of- way. This area is to be in common ownership or management. 10' adjacent to property line
Building setbacks	25' front, 15' rear, 10' and 3' side	10' front, 30' front plus rear	10' front	Individual unit lot:
Maximum height	3 stories or 40 ^{!(5)}	3 stories or 40'(5)	3 stories or 40' for first 150'; 1' in 5' increase to 48' height, 4-story maximum ⁽⁵⁾	3 stories or 40' for first 150'; 1' in 1' increase to 48' height, 4-story maximum ⁽⁵⁾
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	100% for each individual lot. 50% for other parcels or tracts with accessory structures
Common areas	None	None	Minimum 5% of gross area	Minimum 5% of gross area


August 29, 2025 Page 114 of 173

Table 616.B R-3A Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)


Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	(d) Single-Family Infill ⁽⁴⁾
Allowed development	Single-family detached ⁽³⁾ , single-family attached and multi-family	Single-family detached ⁽³⁾ , single-family attached and multi-family	Single-family detached ⁽³⁾ , single-family attached and multi-family	Single-family attached and single-family detached (per the provisions of Section 608.F.6 only)
Required review	Subdivision to create 4 or more lots	Subdivision with building setbacks	Development review per Section 507	Development review per Section 507
Street standards	Public street required	Public street	Public street or private accessway(1)	Development site: public street, public alley, or private accessway. Individual unit lot: private accessway, or private drive(1)


- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) The only single family detached developments that the standards of the table apply to are ones built or subdivided prior to May 1, 1998.
- (4) The single-family infill development option must comply with the additional development regulations provided in Section 608.F.6.
- (5) There shall be a 15-foot maximum height within ten feet of a single-family zoned district, which height may be increased one foot for each additional one foot of building setback to the maximum permitted height.


August 29, 2025 Page 115 of 173

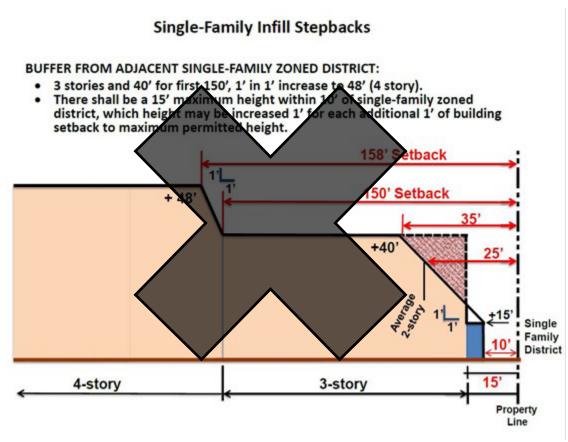

ILLUSTRATIONS OF DEVELOPMENT OPTIONS







Standard Option

Standard Subdivision

Planned Residential Development

	TABLE 616.1 R-3A DEVELOPMENT STANDARDS			
CATEGORY (A) STANDARD OPTION (B) PLANNED RESIDE DEVELOPMENT (
(1)	LOT WIDTH (MINIMUM)	60 FEET	NONE	

August 29, 2025 Page 116 of 173

	TABLE 616.1 R-3A DEVELOPMENT STANDARDS			
CATI	EGORY	(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(2)	LOT DEPTH (MINIMUM)	94 FEET	NONE	
(3)	DEVELOPMENT DENSITY (MAXIMUM)	22.0 PDU/AC (GROSS)	23.0 PDU/AC (GROSS); 26.5 WITH BONUS	
(4)	SUBDIVIDED LOTS (MAXIMUM)	22.0 LOTS/AC (GROSS)	23.0 LOTS/AC (GROSS); 26.5 WITH BONUS	
(5)	INDIVIDUAL LOT SETBACKS (MINIMUM)	FRONT: 25 FEET REAR: 15 FEET STREET SIDE: 10 FEET INTERIOR SIDES: 10 FEET AND 3 FEET	FRONT: 10 FEET REAR: NONE STREET SIDE: 10 FEET INTERIOR SIDES: NONE	
(6)	GARAGE DOOR/CARPORT ENTRY SETBACK (MINIMUM)	SAME AS INDIVIDUAL LOT SETBACKS	FRONT: 18 FEET	
(7)	PROJECTIONS	PER SECTION 701.A.3.A	PER SECTION 701.A.3.B	
(8)	DEVELOPMENT PERIMETER BUILDING SETBACK (MINIMUM)	NONE	PERIMETER STREET: 20 FEET. OTHER PROPERTY LINE: 15 FEET	
(9)	PERIMETER STREET LANDSCAPE SETBACK (MINIMUM)	NONE	15 FEET, EXCEPT NONE ON LOTS WHICH FRONT ON A PERIMETER STREET. MAY BE PROVIDED AS PART OF THE REQUIRED BUILDING SETBACK.	

August 29, 2025 Page 117 of 173

	TABLE 616.1 R-3A DEVELOPMENT STANDARDS			
CATE	EGORY	(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(10)	BUILDING HEIGHT (MAXIMUM)	2 STORIES AND 30 FEET**	3 STORIES AND 40 FEET FOR FIRST 150 FEET FROM DEVELOPMENT PERIMETER; ONE FOOT HEIGHT INCREASE FOR EACH FIVE FEET IN SETBACK INCREASE TO MAXIMUM 4 STORIES AND 48 FEET HIGH**	
(11)	LOT COVERAGE (MAXIMUM)	50%, PLUS AN ADDITIONAL 10% FOR AN ADU AND/OR ATTACHED SHADE STRUCTURES TOTAL: 60%	60% TOTAL FOR DEVELOPMENT	
(12)	COMMON OPEN SPACE (MINIMUM)	NONE	5% OF GROSS AREA	
(13)	STREET FRONTAGE REQUIREMENT	PUBLIC STREET	PUBLIC STREET OR PRIVATE ACCESSWAY	
(14)	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION		SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; MULTI-FAMILY: SECTION 703.B BONUS: SECTION 608.H; SFI SUBDIVISIONS: SECTION 608.I	

^{**} THERE SHALL BE A 15-FOOT MAXIMUM HEIGHT WITHIN TEN FEET OF A SINGLE-FAMILY ZONED DISTRICT, WHICH HEIGHT MAY BE INCREASED ONE FOOT FOR EACH ADDITIONAL ONE FOOT OF BUILDING SETBACK TO THE MAXIMUM PERMITTED HEIGHT.

Amend Chapter 6, Section 617 (R-4 Multi-Family Residence District) to read as follows:

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 118 of 173

Section 617. R-4 Multifamily MULTI-FAMILY Residence District

A. Purpose. The purpose of the multi-family residence districts is to provide for alternate living styles including rental, condominiums and single ownership of land with multiple units thereon or single or attached townhomes.

The density ranges offered are intended to allow for a greater interaction of residents with at least the opportunity for less individual maintenance, unit cost, and size as compared with a conventional single-family residence.

The TWO-design DEVELOPMENT options, of average lot subdivision, STANDARD and planned residential DEVELOPMENT, and single-family attached development are intended to provide flexibility as to unit placement, variable yard requirements, more reasonable and practical use of open spaces, staggered height limits up to three and four stories and more standardized parking and street improvement requirements. Bonus provisions are intended to facilitate and enhance the utilization of smaller infill parcels as well as unusual and irregular parcels throughout the City.

Along with the freedom that the multi-family district offers are certain responsibilities which must be met for project residents, but more importantly for the overall adjacent neighborhood. These are expressed in terms of standards and performance criteria. The standards internal to a project are intended to increase livability with amenities including landscaping, recreational facilities and project design. On the other hand the exterior standards provide a better fit, [and] better the project and the neighborhood environs. Criteria relating to setbacks, screening and landscaping are intended to reduce noise, maintain privacy and minimize psychological feelings to a change in development character and avoid any adverse effect on property values.

B. **District Regulations.** The following tables establishES standards to be used in the R-4 district. The definitions of terms used in these standards are found in Section 608.I. The single family infill development option must meet Section 608.F.6 requirements. REFER TO SECTION 608, RESIDENTIAL DISTRICTS, FOR PERMITTED USES AND ADDITIONAL DEVELOPMENT REGULATIONS.

August 29, 2025 Page 119 of 173

Table 617.A R-4 Development Options Single-Family Detached Development(3)

SIR	gle-Family Detached Developme	n t o
Standards	Conventional	Planned Residential Development
Minimum lot width	55' minimum	45' minimum (unless approved by either the design advisor or the Design Review Committee for demonstrating enhanced architecture that minimizes the impact of the garage
Minimum lot depth	None, except 110' adjacent to freeway or arterial	None, except 110' adjacent to freeway or arterial
Dwelling unit density (units/gross acre)	5.0	6.5; 12 with bonus
Minimum perimeter building setb acks	Front: 15'; Rear: 15' (1-story), 20' (2-story); Side: 10' (1-story), 15' (2-story)	Street ⁽²⁾ (front, rear or side): 15' (in addition to landscape setback); Property line (rear): 15' (1-story), 20' (2-story); Property line (side): 10' (1-story), 15' (2-story)
Common landscaped setback adjacent to-perimeter streets ⁽²⁾	None	15' average, 10' minimum (Does not apply to lots fronting onto perimeter streets)
Minimum interior building setbacks	Front: 10'; rear: 10'; combined front and rear: 35', street side: 10'; sides: 13' total (3' minimum, unless 0')	Front: 10'; rear: none (established by Building Code); street side: 10'; sides: none (established by Building Code)
Minimum building separation	10'	None

August 29, 2025 Page 120 of 173

Table 617.A R-4 Development Options Single-Family Detached Development (3)


Standards	Conventional	Planned Residential Development
Minimum garage setback	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages
Maximum garage width	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum
Maximum height	2 stories and 30'	2 stories and 30' (except that 3 stories not exceeding 30' are permitted when approved by the design advisor for demonstrating enhanced architecture)
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures	50%, plus an additional 10% for an ADU and/or attached shade structures
	10tal. 0070	10tal. 0070
Common areas	None	Minimum 5% of gross area
Allowed development	Single-family detached(3)	Single-family detached(3)
Required review	Development review per Section 507, and subdivision to create 4 or more lots	Development review per Section 507, and subdivision to create 4 or more lots
Street standards	Public street or private accessway ⁽¹⁾	Public street or private accessway ⁽¹⁾

August 29, 2025 Page 121 of 173

Table 617.A R-4 Development Options Single-Family Detached Development(3)

Standards	Conventional	Planned Residential Development
Landscape standards		Perimeter common: trees spaced a maximum of 20' to 30' on center (based on species) or in equivalent groupings, and 5 shrubs per tree.

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) For single-family detached development built or subdivided prior to May 1, 1998, refer to the development standards of Table 617.B.

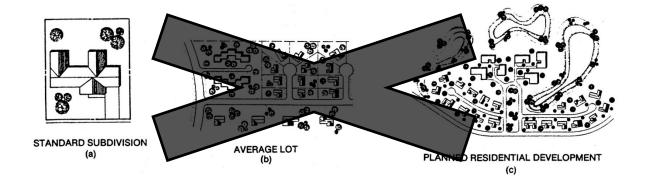

August 29, 2025 Page 122 of 173

Table 617.B R-4 Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)

Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	(d) Single-Family Infill ⁽⁴⁾
Minimum lot dimensions (width and depth)	60' width, 94' depth (Minimum area 6,000 sq. ft.)	40' width, 60' depth	None	Development site: none. Individual dwelling lot: 20'.
Dwelling unit density (units/gross acre)	29.0	29.0	30.45; 34.80 with bonus	30.45; 34.80 with bonus
Perimeter standards	None	20' front, 15' rear, 10' side	20' adjacent to a public street; this area is to be in common ownership unless lots front on the perimeter public street ⁽²⁾ ; 15' adjacent to property line	10' for units fronting street rights-of-way; 15' for units siding street rights-of- way. This area is to be in common ownership or management. 10' adjacent to property line
Building setbacks	20' front, 15' rear, 10' and 3' side	10' front, 30' front plus rear	10' front	Individual unit lot:
Maximum height	3 stories or 40 ^{!(5)}	3 stories or 40'(5)	3 stories or 40' for first 150'; 1' in 5' increase to 48' height, 4-story maximum ⁽⁵⁾	3 stories or 40' for first 150'; 1' in 1' increase to 48' height, 4-story maximum ⁽⁵⁾
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	100% for each individual lot. 50% for other parcels or tracts with accessory structures
Common areas	None	None	Minimum 5% of gross area	Minimum 5% of gross area


August 29, 2025 Page 123 of 173

Table 617.B R-4 Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)


Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	(d) Single-Family Infill ⁽⁴⁾
Allowed development	Single-family detached ⁽³⁾ , single-family attached and multi-family	Single-family detached ⁽³⁾ , single-family attached and multi-family	Single-family detached ⁽³⁾ , single-family attached and multi-family	Single-family attached and single-family detached (per the provisions of Section 608.F.6 only)
Required review	Subdivision to create 4 or more lots	Subdivision with building setbacks	Development review per Section 507	Development review per Section 507
Street standards	Public street required	Public street	Public street or private accessway(1)	Development site: public street, public alley, or private accessway. Individual unit lot: private accessway, or private drive(1)


- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) The only single family detached developments that the standards of the table apply to are ones built or subdivided prior to May 1, 1998.
- (4) The single-family infill development option must comply with the additional development regulations provided in Section 608.F.6.
- (5) There shall be a 15-foot maximum height within ten feet of a single-family zoned district, which height may be increased one foot for each additional one foot of building setback to the maximum permitted height.


August 29, 2025 Page 124 of 173

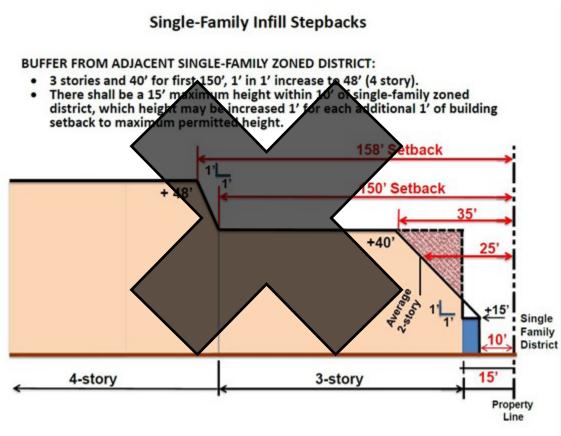

ILLUSTRATIONS OF DEVELOPMENT OPTIONS







Standard Option

Standard Subdivision

Planned Residential Development

	TABLE 617.1 R-4 DEVELOPMENT STANDARDS				
STANDARD OPTION			(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)		
(1)	LOT WIDTH (MINIMUM)	60 FEET	NONE		

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 125 of 173

	TABLE 617.1 R-4 DEVELOPMENT STANDARDS			
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(2)	LOT DEPTH (MINIMUM)	94 FEET	NONE	
(3)	DEVELOPMENT DENSITY (MAXIMUM)	29.0 PDU/AC (GROSS)	30.0 PDU/AC (GROSS); 35.0 WITH BONUS	
(4)	SUBDIVIDED LOTS (MAXIMUM)	29.0 LOTS/AC (GROSS)	30.0 LOTS/AC (GROSS); 35.0 WITH BONUS	
(5)	INDIVIDUAL LOT SETBACKS (MINIMUM)	FRONT: 20 FEET REAR: 15 FEET STREET SIDE: 10 FEET INTERIOR SIDES: 10 FEET AND 3 FEET	FRONT: 10 FEET REAR: NONE STREET SIDE: 10 FEET INTERIOR SIDES: NONE	
(6)	GARAGE DOOR/CARPORT ENTRY SETBACK (MINIMUM)	SAME AS INDIVIDUAL LOT SETBACKS.	FRONT: 18 FEET	
(7)	PROJECTIONS	PER SECTION 701.A.3.A	PER SECTION 701.A.3.B	
(8)	DEVELOPMENT PERIMETER BUILDING SETBACK (MINIMUM)	NONE	PERIMETER STREET: 20 FEET. OTHER PROPERTY LINE: 15 FEET	
(9)	PERIMETER STREET LANDSCAPE SETBACK (MINIMUM)	NONE	15 FEET, EXCEPT NONE ON LOTS WHICH FRONT ON A PERIMETER STREET. MAY BE PROVIDED AS PART OF THE REQUIRED BUILDING SETBACK.	

August 29, 2025 Page 126 of 173

TABLE 617.1 R-4 DEVELOPMENT STANDARDS				
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(10)	BUILDING HEIGHT (MAXIMUM)	3 STORIES AND 40 FEET**	3 STORIES AND 40 FEET FOR FIRST 150 FEET FROM DEVELOPMENT PERIMETER; ONE FOOT HEIGHT INCREASE FOR EACH FIVE FEET IN SETBACK INCREASE TO MAXIMUM 4 STORIES AND 48 FEET HIGH**	
(11)	LOT COVERAGE (MAXIMUM)	50%, PLUS AN ADDITIONAL 10% FOR AN ADU AND/OR ATTACHED SHADE STRUCTURES TOTAL: 60%	60% TOTAL FOR DEVELOPMENT	
(12)	COMMON OPEN SPACE (MINIMUM)	NONE	5% OF GROSS AREA	
(13)	STREET FRONTAGE REQUIREMENT	PUBLIC STREET	PUBLIC STREET OR PRIVATE ACCESSWAY	
(14)	OTHER APPLICABLE REGULATIONS:	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; MULTI-FAMILY: SECTION 703.B	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; MULTI-FAMILY: SECTION 703.B BONUS: SECTION 608.H; SFI SUBDIVISIONS: SECTION 608.I	

^{**} THERE SHALL BE A 15-FOOT MAXIMUM HEIGHT WITHIN TEN FEET OF A SINGLE-FAMILY ZONED DISTRICT, WHICH HEIGHT MAY BE INCREASED ONE FOOT FOR EACH ADDITIONAL ONE FOOT OF BUILDING SETBACK TO THE MAXIMUM PERMITTED HEIGHT.

Amend Chapter 6, Section 618 (R-5 Multi-Family Residence District) to read as follows:

Exhibit A: Z-TA-1-25-Y August 29, 2025

Page 127 of 173

Section 618. R-5 Multi-Family Residence District—Restricted Commercial

A. Purpose. The purpose of the multi-family residence districts is to provide for alternate living styles including rental, condominiums and single ownership of land with multiple units thereon or single or attached townhomes.

The density ranges offered are intended to allow for a greater interaction of residents with at least the opportunity for less individual maintenance, unit cost, and size as compared with a conventional single-family residence.

The TWO-design DEVELOPMENT options, of average lot subdivision, STANDARD and planned residential DEVELOPMENT, and single-family attached development are intended to provide flexibility as to unit placement, variable yard requirements, more reasonable and practical use of open spaces, staggered height limits up to three and four stories and more standardized parking and street improvement requirements. Bonus provisions are intended to facilitate and enhance the utilization of smaller infill parcels as well as unusual and irregular parcels throughout the City.

Along with the freedom that the multi-family district offers are certain responsibilities which must be met for project residents, but more importantly for the overall adjacent neighborhood. These are expressed in terms of standards and performance criteria. The standards internal to a project are intended to increase livability with amenities including landscaping, recreational facilities and project design. On the other hand the exterior standards provide a better fit, [and] better the project and the neighborhood environs. Criteria relating to setbacks, screening and landscaping are intended to reduce noise, maintain privacy and minimize psychological feelings to a change in development character and avoid any adverse effect on property values.

B. **District Regulations—Residential Uses.** The following tables establishES standards to be used in the R-5 district. The definitions of terms used in these standards are found in Section 608.I. The single-family infill development option must meet Section 608.F.6 requirements. REFER TO SECTION 608, RESIDENTIAL DISTRICTS, FOR PERMITTED USES AND ADDITIONAL DEVELOPMENT REGULATIONS.

August 29, 2025 Page 128 of 173

Table 618.A R-5 Development Options Single-Family Detached Development(3)

Single-Family Detached Development ⁽³⁾				
Standards	Conventional	Planned Residential Development		
Minimum lot width	55' minimum	45' minimum (unless approved by either the design advisor or the Design Review Committee for demonstrating enhanced architecture that minimizes the impact of the garage		
Minimum lot depth	None, except 110' adjacent to freeway or arterial	None, except 110' adjacent to freeway or arterial		
Dwelling unit density (units/gross acre)	5.0	6.5; 12 with bonus		
Minimum perimeter building setb acks	Front: 15'; Rear: 15' (1-story), 20' (2-story); Side: 10' (1-story), 15' (2-story)	Street ⁽²⁾ -(front, rear or side): 15' (in addition to landscape setback); Property line (rear): 15' (1-story), 20' (2-story); Property line (side): 10' (1-story), 15' (2-story)		
Common landscaped setback adjacent to- perimeter streets ⁽²⁾	None	15' average, 10' minimum (Does not apply to lots fronting onto perimeter streets)		
Minimum interior building setbacks	Front: 10'; rear: 10'; combined front and rear: 35', street side: 10'; sides: 13' total (3' minimum, unless 0')	Front: 10'; rear: none (established by Building Code); street side: 10'; sides: none (established by Building Code)		
Minimum building separation	10'	None		

August 29, 2025 Page 129 of 173

Table 618.A R-5 Development Options Single-Family Detached Development(3)


Standards	Conventional	Planned Residential Development
Minimum garage setback	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages	18' from back of sidewalk for front-loaded garages, 10' from property line for side-loaded garages
Maximum garage width	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum	For lots <60': 2 car widths, for lots ≥60' to 70': 3 car widths, for lots >70': no maximum
Maximum height	2 stories and 30'	2 stories and 30' (except that 3 stories not exceeding 30' are permitted when approved by the design advisor for demonstrating enhanced architecture)
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%
Common areas	None	Minimum 5% of gross area
Allowed development	Single-family detached(3)	Single-family detached ⁽³⁾
Required review	Development review per Section 507, and subdivision to create 4 or more lots	Development review per Section 507, and subdivision to create 4 or more lots
Street standards	Public street or private accessway ⁽¹⁾	Public street or private accessway ⁽¹⁾

August 29, 2025 Page 130 of 173

Table 618.A R-5 Development Options Single-Family Detached Development(3)

Standards	Conventional	Planned Residential Development
Landscape standards		Perimeter common: trees spaced a maximum of 20' to 30' on center (based on species) or in equivalent groupings, and 5 shrubs per tree.

- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) For single-family detached development built or subdivided prior to May 1, 1998, refer to the development standards of Table 618.B.

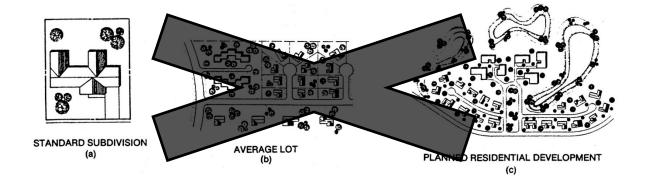

August 29, 2025 Page 131 of 173

Table 618.B R-5 Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)

Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	(d) Single-Family Infill ⁽⁴⁾
Minimum lot dimensions (width and depth)	60' width, 94' depth (Minimum area 6,000 sq. ft.)	40' width, 60' depth	None	Development site: none. Individual dwelling lot: 20'.
Dwelling unit density (units/gross acre)	43.5	43.5	45.68;52.20 with bonus	45.68;52.20 with bonus
Perimeter standards	None	20' front, 15' rear, 10' side	20' adjacent to a public street; this area is to be in common ownership unless lots front on the perimeter public street ⁽²⁾ ; 15' adjacent to property line	10' for units fronting street rights of way; 15' for units siding street rights of way. This area is to be in common ownership or management. 10' adjacent to property line
Building setbacks	20' front, 15' rear, 10' and 3' side	10' front, 30' front plus rear	10' front	Individual unit lot:
Maximum height	4 stories or 48'(5)	4 stories or 48'(5)	4 stories or 48'(5)	4 stories or 48'(5)
Lot coverage	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	50%, plus an additional 10% for an ADU and/or attached shade structures Total: 60%	100% for each individual lot. 50% for other parcels or tracts with accessory structures
Common areas	None	None	Minimum 5% of gross area	Minimum 5% of gross area

August 29, 2025 Page 132 of 173

Table 618.B R-5 Development Options Single-Family Attached and Multi-Family Development, and Single-Family Detached Development (Subdivided Prior to May 1, 1998)

Standards	(a) Subdivision	(b) Average Lot	(c) Planned Residential Development	(d) Single-Family Infill ⁽⁴⁾
Allowed development	Single-family detached, single- family attached and multi-family	Single-family detached, single- family attached and multi-family	Single-family detached, single- family attached and multi-family	Single-family attached and single-family detached (per the provisions of Section 608.F.6 only)
Required review	Subdivision to create 4 or more lots	Subdivision with building setbacks	Development review per Section 507	Development review per Section 507
Street standards	Public street required	Public street	Public street or private accessway(1)	Development site: public street, public alley, or private accessway. Individual unit lot: private accessway, or private drive(1)


- (1) Public streets may be required as a part of subdivision or development review for extensions of street patterns, for circulation within neighborhoods, or to continue partial dedications.
- (2) For purposes of this section, canal rights-of-way shall be treated the same as public street rights-of-way.
- (3) The only single family detached developments that the standards of the table apply to are ones built or subdivided prior to May 1, 1998.
- (4) The single-family infill development option must comply with the additional development regulations provided in Section 608.F.6.
- (5) There shall be a 15-foot maximum height within ten feet of a single-family zoned district, which height may be increased one foot for each additional one foot of building setback to the maximum permitted height.

August 29, 2025 Page 133 of 173


Single-Family Infill Stepbacks

BUFFER FROM ADJACENT SINGLE-FAMILY ZONED DISTRICT:


R-5: 4 stories and 48'.

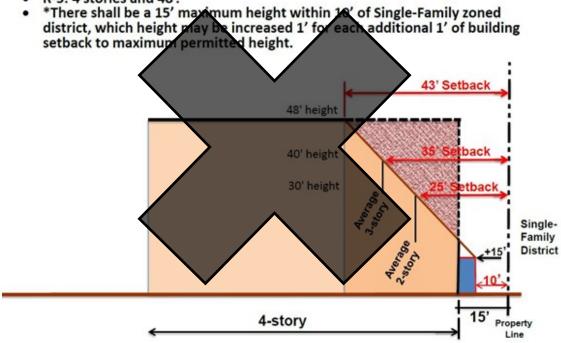

ILLUSTRATIONS OF DEVELOPMENT OPTIONS







Standard Option

Standard Subdivision

Planned Residential Development

	TABLE 618.1 R-5 RESIDENTIAL DEVELOPMENT STANDARDS				
CATEGORY (A) STANDARD OPTION (B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)			PLANNED RESIDENTIAL		
(1)	LOT WIDTH (MINIMUM)	60 FEET	NONE		

August 29, 2025 Page 134 of 173

	TABLE 618.1 R-5 RESIDENTIAL DEVELOPMENT STANDARDS			
CATE	EGORY	(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)	
(2)	LOT DEPTH (MINIMUM)	94 FEET	NONE	
(3)	DEVELOPMENT DENSITY (MAXIMUM)	43.5 PDU/AC (GROSS)	45.5 PDU/AC (GROSS); 52.5 WITH BONUS	
(4)	SUBDIVIDED LOTS (MAXIMUM)	43.5 LOTS/AC (GROSS)	45.5 LOTS/AC (GROSS); 52.5 WITH BONUS	
(5)	INDIVIDUAL LOT SETBACKS (MINIMUM)	FRONT: 20 FEET REAR: 15 FEET STREET SIDE: 10 FEET INTERIOR SIDES: 10 FEET AND 3 FEET	FRONT: 10 FEET REAR: NONE STREET SIDE: 10 FEET INTERIOR SIDES: NONE	
(6)	GARAGE DOOR/CARPORT ENTRY SETBACK (MINIMUM)	SAME AS INDIVIDUAL LOT SETBACKS	FRONT: 18 FEET	
(7)	PROJECTIONS	PER SECTION 701.A.3.A	PER SECTION 701.A.3.B	
(8)	DEVELOPMENT PERIMETER BUILDING SETBACK (MINIMUM)	NONE	PERIMETER STREET: 20 FEET. OTHER PROPERTY LINE: 15 FEET	
(9)	PERIMETER STREET LANDSCAPE SETBACK (MINIMUM)	NONE	15 FEET, EXCEPT NONE ON LOTS WHICH FRONT ON A PERIMETER STREET. MAY BE PROVIDED AS PART OF THE REQUIRED BUILDING SETBACK.	
(10)	BUILDING HEIGHT (MAXIMUM)	4 STORIES AND 48 FEET**	4 STORIES AND 48 FEET**	

August 29, 2025 Page 135 of 173

	TABLE 618.1 R-5 RESIDENTIAL DEVELOPMENT STANDARDS				
CATEGORY		(A) STANDARD OPTION	(B) PLANNED RESIDENTIAL DEVELOPMENT (PRD)		
(11)	LOT COVERAGE (MAXIMUM)	50%, PLUS AN ADDITIONAL 10% FOR AN ADU AND/OR ATTACHED SHADE STRUCTURES TOTAL: 60%	60% TOTAL FOR DEVELOPMENT		
(12)	COMMON OPEN SPACE (MINIMUM)	NONE	5% OF GROSS AREA		
(13)	STREET FRONTAGE REQUIREMENT	PUBLIC STREET	PUBLIC STREET OR PRIVATE ACCESSWAY		
(14)	OTHER APPLICABLE REGULATIONS:	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; MULTI-FAMILY: SECTION 703.B	SUBDIVISIONS: CHAPTER 32, CITY CODE; DESIGN REVIEW: SECTION 507 TAB A; MULTI-FAMILY: SECTION 703.B BONUS: SECTION 608.H; SFI SUBDIVISIONS: SECTION 608.I		

^{**} THERE SHALL BE A 15-FOOT MAXIMUM HEIGHT WITHIN TEN FEET OF A SINGLE-FAMILY ZONED DISTRICT, WHICH HEIGHT MAY BE INCREASED ONE FOOT FOR EACH ADDITIONAL ONE FOOT OF BUILDING SETBACK TO THE MAXIMUM PERMITTED HEIGHT.

Amend Chapter 6, Section 619 (Residential R-4A District—Multifamily Residence—General) to read as follows:

Section 619. Residential R-4A District—Multifamily MULTI-FAMILY Residence—General

August 29, 2025 Page 136 of 173

- A. **Permitted Uses.** Primary uses and accessory uses are permitted as indicated in the Residential Districts Land Use Matrix, Section 608.D, plus the following:
 - 1. Hospice, subject to a use permit.
 - 2. Nursing home, subject to a use permit and the following conditions:
 - a. A maximum lot coverage of 25 percent.
 - b. A minimum of 50 square feet of usable outdoor open space per bed shall be provided.
 - 3. Single-family infill developments, per the provisions of Section 608.F.6 and Table 617.B, R-4 Development Options, column D.
- B. **Yard, Height and Area Requirements.** Except as required by Section 701, the following yard, height and area provisions shall be required for this district:

- 8. Single-family infill development must comply with all regulations applicable to SFI development in the R-4 district except for density, which shall be permitted per Section 619.B.1.
- 9. Off-site manufactured home developments, upon obtaining use permit approval, shall comply with the R-4 standards for planned residential developments (Table 617.B, column C) except for density, which shall be permitted per Section 619.B.1.

Amend Chapter 6, Section 622 (Commercial C-1 District—Neighborhood Retail) to read as follows:

Section 622. Commercial C-1 District—Neighborhood Retail.

August 29, 2025 Page 137 of 173

- A. **Purpose.** The C-1, Commercial Neighborhood Retail District, is a district of light neighborhood type retail and customer service uses designed to be compatible with each other and nearby residential districts.
- B. Reserved.
- C. B. **District Restrictions.** Unless otherwise specifically provided in this Section, the following restrictions shall apply to this district:
 - 1. All commercial uses are restricted to closed buildingS except parking lots and liquid fuel pump services.

10. The sale of used merchandise in connection with the following permitted uses when such used merchandise uses a floorspace having a total area of no more than five (5) percent of the gross floor area of the establishment:

g. Audio and video rentals and retail sales.

C. **PERMITTED USES—RESIDENTIAL.**

- 1. SINGLE-FAMILY RESIDENTIAL USES, BUT ONLY WITHIN SINGLE-FAMILY INFILL (SFI) SUBDIVISIONS DEVELOPED PER THE PROVISIONS OF 608.I, INCLUDING USE PERMIT APPROVAL WHERE APPLICABLE.
- 2. ALL OTHER RESIDENTIAL USES OTHER THAN SINGLE-FAMILY, AS PERMITTED IN THE R-5 DISTRICT.
- 3. ADULT DAY CARE HOME AND CENTER
- 4. BOARDING HOUSE, SUBJECT TO A USE PERMIT
- 5. COMMUNITY RESIDENCE CENTER, SUBJECT TO A USE PERMIT
- 6. GROUP HOME, SUBJECT TO A USE PERMIT

August 29, 2025 Page 138 of 173

- 7. NURSING HOME, SUBJECT TO A USE PERMIT
- D. **Permitted Uses—NON-RESIDENTIAL.** All NON-RESIDENTIAL uses permitted in R1-6 if zoned commercial prior to January 5, 1994, non-single-family residential, and single-family attached uses permitted in R-3, R-4, THE R-5 DISTRICT and R-4A; and in addition the following:

RESERVED. Adult Day Care Home and Center

19. RESERVED. Boarding House, subject to a use permit

38. RESERVED. Community Residence Center, subject to a use permit

76. RESERVED. Group Home, subject to a use permit

120. RESERVED. Nursing Home, subject to a use permit

E. Yard, Height and Area Requirements. To protect surrounding neighborhoods and preserve the public welfare, standards are herein established for yard, height and area requirements to provide an appropriate transition between commercial uses and adjoining neighborhoods. In recognition of the goals contained in the General Plan for uses and intensities within core areas, greater heights and intensities are herein encouraged.

August 29, 2025 Page 139 of 173

1. Any multiple-MULTI-family residential use shall conform to the yard, height, area and density requirements set forth in Section 615 FOR THE R-3 DISTRICT except as otherwise provided herein:

- d. Any residential use within the downtown redevelopment area, as defined in City Council Resolution No. 15143 shall conform to the yard, height, area, and density requirements set forth in Section 618. OFF-SITE MANUFACTURED HOME DEVELOPMENTS SHALL COMPLY WITH ALL DEVELOPMENT REGULATIONS OF SECTION 608.J, INCLUDING USE PERMIT APPROVAL.
- 2. Any single-family residential use shall conform to the following requirements:
 - a. Such development shall be permitted only if the property is designated as residential on the General Plan Map. If this standard is satisfied, the remainder of this section shall apply.
 - b. The applicant shall submit in writing to the Zoning Administrator a declaration of the development option (standard subdivision, average lot subdivision, conventional, or planned residential development) and density proposed for the residential use.
 - c. The Zoning Administrator shall determine the residential zoning district to which the proposed single-family development is equivalent, the use shall satisfy the development standards contained in Sections 609 through 613 for the development option and density of the equivalent zoning district.
 - d. Upon completion of development of a single-family residential use in accordance with this section, the Planning Commission shall initiate an application for rezoning the site to the residential zoning district appropriate for the site.
- 2. SINGLE-FAMILY INFILL (SFI) SUBDIVISIONS SHALL BE DEVELOPED ONLY AS PERMITTED BY THE PROVISIONS OF SECTION 608.I. R-3 PLANNED RESIDENTIAL DEVELOPMENT OPTION STANDARDS SHALL APPLY WHEN NOT IDENTIFIED OR MODIFIED BY SECTION 608.I.

August 29, 2025 Page 140 of 173

Amend Chapter 6, Section 623 (Commercial C-2 District —Intermediate Commercial) to read as follows:

Section 623. Commercial C-2 District —Intermediate Commercial.

- A. **Purpose.** The C-2, Commercial Intermediate District, is a district of commercial uses of medium intensity designed to be compatible with each other and to provide for a wide range of types of commercial activity within the district.
- B. Reserved.

C. B. District Restrictions.

- Except as otherwise provided, all permitted uses and storaging of materials or supplies shall be conducted entirely within a closed building.
- 2. The display of merchandise outdoors as an accessory use to the permitted uses set forth in Section 623.D is prohibited unless a use permit is obtained and subject to the following standards for the outdoor display area:
 - a. A maximum 300 square feet of display area can be located anywhere along the building except as noted in Section 623. CB. 2.b;

- 9. With the exception of those instances listed above in 623.CB.7. and CB.8., no other types of vehicle built to carry passengers or cargo can be sold or displayed for sale on-site except by a registered vehicle retail sales dealership and upon obtaining a special permit pursuant to Section 647.
- C. **PERMITTED USES—RESIDENTIAL.**

August 29, 2025 Page 141 of 173

- 1. SINGLE-FAMILY RESIDENTIAL USES, BUT ONLY WITHIN SINGLE-FAMILY INFILL (SFI) SUBDIVISIONS DEVELOPED PER THE PROVISIONS OF 608.I, INCLUDING USE PERMIT APPROVAL WHERE APPLICABLE.
- 2. ALL OTHER RESIDENTIAL USES OTHER THAN SINGLE-FAMILY, AS PERMITTED IN THE C-1 DISTRICT.
- 3. BOARDING HOUSE
- 4. COMMUNITY RESIDENCE CENTER
- 5. GROUP HOME
- 6. NURSING HOME
- D. **Permitted Uses—NON-RESIDENTIAL.** All NON-RESIDENTIAL uses permitted in R1-6 if zoned commercial prior to January 5, 1994, non-single-family residential, and single-family attached uses permitted in R-3, R-4, THE R-5, R-4A, and C-1 districts; and in addition the following:

50. RESERVED. Community Residence Center.

126. RESERVED. Nursing Home.

E. Yard, Height and Area Requirements. To protect surrounding neighborhoods and preserve the public welfare, standards are herein established for yard, height and area requirements to provide an appropriate transition between commercial uses and adjoining neighborhoods. In recognition of the goals contained in the General Plan for uses and intensities within core areas, greater heights and intensities are herein encouraged.

August 29, 2025 Page 142 of 173

1. Any multiple-MULTI-family residential use shall conform to the yard, height, area and density requirements set forth in Section 615 FOR THE R-3 DISTRICT except as otherwise provided herein:

- d. Any residential use within the downtown redevelopment area, as defined in City Council Resolution No. 15143 shall conform to the yard, height, area, and density requirements set forth in Section 618. OFF-SITE MANUFACTURED HOME DEVELOPMENTS SHALL COMPLY WITH ALL DEVELOPMENT REGULATIONS OF SECTION 608.J, INCLUDING USE PERMIT APPROVAL.
- 2. Any single-family residential use shall conform to the following requirements:
 - a. Such development shall be permitted only if the property is designated as residential on the General Plan Map. If this standard is satisfied, the remainder of this section shall apply.
 - b. The applicant shall submit in writing to the Zoning Administrator a declaration of the development option (standard subdivision, average lot subdivision, conventional, or planned residential development) and density proposed for the residential use.
 - c. The Zoning Administrator shall determine the residential zoning district to which the proposed single-family development is equivalent, the use shall satisfy the development standards contained in Sections 609 through 613 for the development option and density of the equivalent zoning district.
 - d. Upon completion of development of a single-family residential use in accordance with this section, the Planning Commission shall initiate an application for rezoning the site to the residential zoning district appropriate for the site.
- 2. SINGLE-FAMILY INFILL (SFI) SUBDIVISIONS SHALL BE DEVELOPED ONLY AS PERMITTED BY THE PROVISIONS OF SECTION 608.I. R-3 PLANNED RESIDENTIAL DEVELOPMENT OPTION STANDARDS SHALL APPLY WHEN NOT IDENTIFIED OR MODIFIED BY SECTION 608.I.

August 29, 2025 Page 143 of 173

Amend Chapter 6, Section 624 (Commercial C-3 District —General Commercial) to read as follows:

Section 624. Commercial C-3 District —General Commercial.

- A. Purpose. The C-3 Commercial General District, is a district designed to provide for the intensive commercial uses necessary to the proper development of the community.
- B. Reserved

C. B. District Restrictions.

- 1. Any lighting shall be placed so as to reflect the light away from adjacent residential districts. No noise, odor or vibration shall be emitted so that it exceeds the general level of noise, odor or vibration emitted by uses outside the site. Such comparison shall be made at the boundary of the site.
- 2. The display of merchandise outdoors as an accessory use to the permitted uses set forth in Section 624.D is prohibited unless a use permit is obtained and subject to the following standards for the outdoor display area:
 - a. A maximum 300 square feet of display area can be located anywhere along the building except as noted in Section 624.CB.2.b;

- 4. With the exception of those instances listed above in 624. CB.3., no other types of vehicle built to carry passengers or cargo can be sold or displayed for sale on-site except by a registered vehicle retail sales dealership.
- <u>C.</u> **PERMITTED USES—RESIDENTIAL.**

August 29, 2025 Page 144 of 173

- 1. SINGLE-FAMILY RESIDENTIAL USES, BUT ONLY WITHIN SINGLE-FAMILY INFILL (SFI) SUBDIVISIONS DEVELOPED PER THE PROVISIONS OF 608.I, INCLUDING USE PERMIT APPROVAL WHERE APPLICABLE.
- 2. ALL OTHER RESIDENTIAL USES OTHER THAN SINGLE-FAMILY, AS PERMITTED IN THE C-2 DISTRICT.
- D. **Permitted Uses—NON-RESIDENTIAL.** All NON-RESIDENTIAL uses permitted in R1-6 if zoned commercial prior to January 5, 1994, non-single-family residential, and single-family attached uses permitted in R-3, R-4, R-5, R-4A, C-1 and THE C-2 districts; and in addition the following, including the storage of all raw materials and finished products in connection herewith:

- E. Yard, Height and Area Requirements. To protect surrounding neighborhoods and preserve the public welfare, standards are herein established for yard, height and area requirements to provide an appropriate transition between commercial uses and adjoining neighborhoods. In recognition of the goals contained in the General Plan for uses and intensities within core areas, greater heights and intensities are herein encouraged.
 - Any multiple MULTI-family residential use shall conform to the yard, height, area and density requirements set forth in Section 615 FOR THE R-3 DISTRICT except as otherwise provided herein:

- d. Neither the Zoning Administrator nor the Board of Adjustment shall have jurisdiction to vary the provisions of Section 624.E.1.OFF-SITE MANUFACTURED HOME DEVELOPMENTS SHALL COMPLY WITH ALL DEVELOPMENT REGULATIONS OF SECTION 608.J, INCLUDING USE PERMIT APPROVAL.
- e. Any residential use within the downtown redevelopment area, as defined in City Council Resolution No. 15143 shall conform to the yard, height, area, and density requirements set forth in Section 618.

August 29, 2025 Page 145 of 173

- 2. Any single-family residential use shall conform to the following requirements:
 - a. Such development shall be permitted only if the property is designated as residential on the General Plan Map. If this standard is satisfied, the remainder of this section shall apply.
 - b. The applicant shall submit in writing to the Zoning Administrator a declaration of the development option (standard subdivision, average lot subdivision, conventional, or planned residential development) and density proposed for the residential use.
 - c. The Zoning Administrator shall determine the residential zoning district to which the proposed single-family development is equivalent, the use shall satisfy the development standards contained in Sections 609 through 613 for the development option and density of the equivalent zoning district.
 - d. Upon completion of development of a single-family residential use in accordance with this section, the Planning Commission shall initiate an application for rezoning the site to the residential zoning district appropriate for the site.
- 2. SINGLE-FAMILY INFILL (SFI) SUBDIVISIONS SHALL BE DEVELOPED ONLY AS PERMITTED BY THE PROVISIONS OF SECTION 608.I. R-3 PLANNED RESIDENTIAL DEVELOPMENT OPTION STANDARDS SHALL APPLY WHEN NOT IDENTIFIED OR MODIFIED BY SECTION 608.I.

Amend Chapter 6, Section 632 (High-Rise H-R1 District—High-Rise and High Density District) to strike everything, and replace with the following text:

SECTION 632. MIDDLE HOUSING (MH) OVERLAY DISTRICT

A. **PURPOSE.** THE PURPOSE OF THIS OVERLAY DISTRICT IS TO ESTABLISH ZONING REGULATIONS WHICH ACHIEVE COMPLIANCE WITH SECTION 9-462.13, ARIZONA REVISED STATUTES, AS FOLLOWS:

August 29, 2025 Page 146 of 173

1. ENTITLE PROPERTIES WITHIN THE MIDDLE HOUSING OVERLAY DISTRICT TO HAVE UP TO FOUR PRIMARY DWELLING UNITS PER LOT.

2. PROVIDE MODIFIED DEVELOPMENT REGULATIONS FOR MIDDLE HOUSING.

B. **APPLICABILITY.**

- 1. THE MH OVERLAY MAY BE COMBINED WITH ANY ZONING DISTRICT WHEN ALSO IN COMPLIANCE WITH THE ELIGIBILITY REQUIREMENTS OF SECTION 632.C.
- 2. IF THE PROVISIONS OF THE MH OVERLAY CONFLICT WITH OTHER ZONING REGULATIONS APPLICABLE TO THE PROPERTY, THE MH OVERLAY PROVISIONS SHALL PREVAIL, UNLESS OTHERWISE STATED IN THIS SECTION.
- C. **ELIGIBILITY REQUIREMENTS.** THE MH OVERLAY DISTRICT SHALL BE APPLIED TO THE FOLLOWING:
 - 1. A PROPERTY WHICH HAS BEEN REZONED WITH THE MH OVERLAY DISTRICT IN ACCORDANCE WITH SECTION 506; OR
 - 2. LOTS IN A SUBDIVISION HAVING A PLAT RECORDED ON OR AFTER JANUARY 1, 2026, WHICH MEET ALL OF THE FOLLOWING ADDITIONAL CRITERIA:
 - a. THE SUBDIVISION IS CONTIGUOUS AND A MINIMUM 10 GROSS ACRES IN SIZE.
 - b. THE SUBDIVISION HAS NEVER BEEN PART OF A PRIOR SUBDIVISION WHICH HAS APPLIED THE MIDDLE HOUSING PROVISIONS OF SECTION 9-462.13, ARIZONA REVISED STATUTES.
 - c. THE SUBDIVISION HAS BASE ZONING OF RE-43, RE-24, R1-14, RE-35, R1-18, R1-10, R1-8, R1-6, R-2, R-3, R-3A, R-4, R-5, R-4A, C-1, C-2, OR C-3.

August 29, 2025 Page 147 of 173

- d. FOR C-1, C-2, AND C-3 PROPERTIES ONLY: THE SUBDIVISION IS PLATTED AS A SINGLE-FAMILY INFILL (SFI) SUBDIVISION AS SET FORTH IN SECTION 608.I.
- e. THE NUMBER OF LOTS PROPOSED FOR APPLICATION OF THE MH OVERLAY DISTRICT DOES NOT EXCEED 20% OF THE TOTAL NUMBER OF LOTS IN THE SUBDIVISION. FOR SUBDIVISIONS OF FEWER THAN FIVE LOTS, ONE LOT SHALL BE PERMITTED TO HAVE THE MH OVERLAY.
- f. THE SUBDIVISION IS NOT LOCATED IN THE TERRITORY IN THE VICINITY OF: PHOENIX SKY HARBOR INTERNATIONAL AIRPORT; PHOENIX DEER VALLEY AIRPORT; AND SCOTTSDALE AIRPORT; EACH OF WHICH IS A FEDERAL AVIATION ADMINISTRATION COMMERCIALLY LICENSED AIRPORT OR A GENERAL AVIATION OR PUBLIC AIRPORT AS DEFINED IN SECTION 28-8486, ARIZONA REVISED STATUTES.
- g. THE SUBDIVISION IS NOT LOCATED IN THE TERRITORY IN THE VICINITY OF A MILITARY AIRPORT OR ANCILLARY MILITARY FACILITY AS DEFINED IN SECTION 28-8461, ARIZONA REVISED STATUTES.
- h. THE SUBDIVISION IS NOT LOCATED ON TRIBAL LAND.
- I. THE SUBDIVISION OWNER HAS REQUESTED THE CITY TO ASSIGN THE MH OVERLAY DISTRICT WITHIN THE SUBDIVISION THROUGH THE OPT-IN PROCEDURES PROVIDED IN THIS SECTION.
- D. **OPT-IN PROCEDURE.** PRIOR TO UTILIZING THE PROVISIONS OF THE MH OVERLAY DISTRICT, SUBDIVISIONS ELIGIBLE PER SECTION 632.C.2 MUST REQUEST THAT THE CITY APPLY THE MH OVERLAY DISTRICT TO THE LOTS ON WHICH MIDDLE HOUSING SHALL BE PERMITTED, AS FOLLOWS:
 - THE SUBDIVISION OWNER SHALL SIGN BEFORE A NOTARY PUBLIC AN OPT-IN FORM PROVIDED BY THE PLANNING AND DEVELOPMENT DEPARTMENT.

August 29, 2025 Page 148 of 173

2. CONCURRENT WITH THE OPT-IN FORM, THE SUBDIVISION OWNER SHALL SUBMIT A LEGAL DESCRIPTION OF THE LOTS ON WHICH THE MH OVERLAY DISTRICT SHALL BE APPLIED.

- 3. CITY STAFF SHALL REVIEW THE OPT-IN FORM AND LEGAL DESCRIPTION. WHEN THE REQUEST IS CONFIRMED TO BE ELIGIBLE, STAFF SHALL PROCESS A REQUEST TO CHANGE THE OFFICIAL ZONING MAP OF THE CITY OF PHOENIX TO APPLY THE MH OVERLAY DISTRICT TO THE ELIGIBLE SUBDIVISION LOTS.
- 4. ONCE THE ZONING MAP CHANGE IS COMPLETED, THE LOTS SHALL BE OFFICIALLY ASSIGNED THE MH OVERLAY DISTRICT UNTIL SUCH TIME THAT THEY MAY BE REZONED IN ACCORDANCE WITH SECTION 506.
- E. **MIDDLE HOUSING (MH) DEVELOPMENT REGULATIONS.** THE FOLLOWING MODIFIED DEVELOPMENT REGULATIONS APPLY ONLY WHEN THE MH DISTRICT IS COMBINED WITH THE RE-43, RE-24, R1-14, RE-35, R1-18, R1-10, R1-8, R1-6, R-2, R-3, R-3A, R-4, R-5, R-4A, C-1, C-2, OR C-3 ZONING DISTRICTS. FOR ALL OTHER PROPERTIES, THE DEVELOPMENT REGULATIONS OF THE BASE DISTRICT APPLY.
 - 1. **PERMITTED USES.**
 - a. ALL USES PERMITTED WITHIN THE UNDERLYING BASE ZONING DISTRICTS, PLUS
 - b. MULTI-FAMILY DWELLING UNITS.
 - 2. **DENSITY.** THE MAXIMUM NUMBER OF PRIMARY DWELLING UNITS (PDU) PROVIDED ON A LOT ASSIGNED THE MH OVERLAY DISTRICT SHALL NOT EXCEED THE NUMBER ALLOWED BY THE BASE ZONING, OR FOUR PDUS, WHICHEVER IS GREATER.
 - a. THE MAXIMUM NUMBER OF SUBDIVIDED LOTS PER ACRE IS THE SAME AS ALLOWED BY THE BASE ZONING AND IS NOT MODIFIED BY THIS SECTION.

August 29, 2025 Page 149 of 173

- <u>b.</u> FOR THE PLANNED RESIDENTIAL DEVELOPMENT OPTION,
 DENSITY BONUS PROVISIONS ARE APPLICABLE FOR SINGLEFAMILY DEVELOPMENT AS SET FORTH IN SECTION 608.H.1.
- 3. **SETBACKS AND HEIGHT**. THE REQUIRED SETBACKS AND MAXIMUM HEIGHT(S) SHALL BE THE SAME AS FOR A SINGLE-FAMILY DWELLING UNIT ON THE SAME PROPERTY, INCLUDING THOSE FOR PERMITTED PROJECTIONS.
- 4. **LOT COVERAGE.** LOT COVERAGE SHALL BE THE SAME AS FOR THE BASE DISTRICT, WITH THE FOLLOWING EXCEPTION:
 - a. LOTS WITH BASE ZONING OF RE-43, RE-35, RE-24, OR R1-14.

 THE MAXIMUM PERMITTED LOT COVERAGE SHALL BE
 INCREASED TO 50% WHEN ALL STRUCTURES ON THE LOT ARE
 ONE-STORY AND A MAXIMUM 20 FEET IN HEIGHT.
- 5. **PARKING AND MANEUVERING.**
 - a. ON LOTS HAVING NO MORE THAN ONE PRIMARY DWELLING UNIT, A MINIMUM OF TWO PARKING SPACES SHALL BE PROVIDED ONSITE.
 - b. ON LOTS HAVING TWO OR MORE PRIMARY DWELLING UNITS, A MINIMUM OF ONE PARKING SPACE SHALL BE PROVIDED ONSITE PER PDU.
 - <u>c.</u> MANEUVERING WITHIN A PUBLIC ALLEY SHALL BE ALLOWED WHEN IN COMPLIANCE WITH THE FOLLOWING: (T)
 - (1) THE ALLEY IS A MINIMUM 16 FEET WIDE FOR THE LENGTH OF THE BLOCK;
 - (2) THE ALLEY IS PAVED TO THE TWO NEAREST EXISTING CROSS STREETS, TO THE STANDARDS REQUIRED BY THE CITY FOR A LOCAL STREET; AND

August 29, 2025 Page 150 of 173

(3) A MINIMUM OF 24 FEET MANEUVERING AREA IS PROVIDED THAT IS A COMBINATION OF THE ALLEY PAVING AND ONSITE PAVING, OR AS OTHERWISE APPROVED THROUGH A TECHNICAL APPEAL.

6. **DESIGN REVIEW.**

- <u>a.</u> HISTORIC PRESERVATION (HP). DESIGN REVIEW FOR HP-ZONED OR HP-DESIGNATED PROPERTIES SHALL BE AS REQUIRED PER THE PROVISIONS OF CHAPTER 8, WITH NO MODIFICATIONS BY THIS OVERLAY DISTRICT.
- <u>b.</u> ALL LOTS NOT ZONED HP OR DESIGNATED HP, REGARDLESS OF LOT WIDTH, SHALL BE SUBJECT TO THE PROVISIONS OF SECTION 507 TAB A, II.C.9, RESIDENTIAL LOT DESIGN REVIEW.

Amend Chapter 7, Section 701.A.3 (Projections) to read as follows:

A. Lots.

3. Projections.

- a. **STANDARD OPTION.** The following provisions apply to development in Sections 604 through 607 and Section 619 and in the subdivision option of Sections 609 through 618 IN THE RE-43, RE-24, R1-14, AND R-4A DISTRICTS, AND IN THE RE-35, R1-18, R1-10, R1-8, R1-6, R-2, R-3, R-3A, R-4, AND R-5 DISTRICTS WHEN DEVELOPED IN ACCORDANCE WITH THE STANDARD DEVELOPMENT OPTION:
 - (1) Open projections.

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 151 of 173

- (a) In any district, an awning, open porch, open carport, or open balcony may project into any required front yard not more than five feet. FRONT YARD. AN ATTACHED CARPORT, AWNING, PORCH/FRONT ENTRY, PERGOLA, TRELLIS/ARBOR, OR BALCONY MAY PROJECT UP TO FIVE FEET INTO THE REQUIRED FRONT YARD.
- (b) An attached open porch, open carport, or open balcony may project into any side yard other than the side yard on the street side of a corner lot, if it does not come nearest to the side lot line than three feet.

 SIDE YARDS. AN ATTACHED AWNING, PORCH, PERGOLA, TRELLIS/ARBOR, OR BALCONY MAY PROJECT INTO ANY INTERIOR (NOT STREET) SIDE YARD, PROVIDED THAT IT IS NO CLOSER THAN THREE FEET FROM THE SIDE PROPERTY LINE.
 - (i) For any lot wherein a ten-foot or greater side yard is required, no such projection shall be within an area ten feet wide and ten feet high, measured from finished grade, lying within that side yard.
 - (ii) No more than one such clear area, as stipulated in i. above, need be maintained on a lot.
- (c) An attached open porch, open carport, or open balcony may project into a rear yard, provided it does not come nearer to a common rear lot line than three feet. Where a rear alley exists this projection may extend to the rear lot line or to within eight or ten feet of what would be the centerline of a full sixteen- or twenty-foot-wide alley where only a one-half or partial alley exists.

 REAR YARD. AN ATTACHED AWNING, PORCH, PERGOLA, TRELLIS/ARBOR, OR BALCONY MAY PROJECT INTO THE REAR YARD, PROVIDED THAT IT IS NO CLOSER THAN THREE FEET FROM THE REAR PROPERTY LINE.

August 29, 2025 Page 152 of 173

- (i) WHERE A FULLY-DEDICATED ALLEY EXISTS, THIS PROJECTION MAY EXTEND TO THE PROPERTY LINE; OR WHERE ONLY A PARTIALLY-DEDICATED ALLEY EXISTS, TO WITHIN EIGHT OR TEN FEET OF WHAT WOULD BE THE CENTERLINE OF A FULL 16-OR 20-FOOT-WIDE ALLEY.
- (d) Open fire balconies, and OPEN fire escape stairs PROVIDED FOR EMERGENCY USE ONLY may project not more than five feet ever-INTO any required yard provided they come no closer than two feet from a property line.
- (e) Awnings, cornices, CANTILEVERED roof overhangs, and eaves may project more than three feet over-INTO any required yard providing they come no closer than two feet from a property line.
- (f) Sills, leaders, belt courses, and similar ornamental features may project not more than six inches over INTO any required yard.
- (g) An entrance awning may project into any required yard in an R-5 or less restricted district.
- (2) Closed Projections.
 - (a) A bay window, oriel, entrance, or vestibule, ten feet or less in width, may project not more than three feet into any REQUIRED front or rear yard.
 - (b) A chimney may project not more than three feet into any required yard, if it-THE CHIMNEY is not more than six feet long measured in a direction parallel to the nearest property line AND so long as it is not closer than two feet from a property line.

August 29, 2025 Page 153 of 173

- (c) The main building in a residence district may project five feet into the required front yard for no more than one-half of the maximum width of the structure.
- (d) The main building (which may include an attached ADU) may project into the required rear or side yard, subject to the following:
 - (i) The projection is no closer to a side property line than five feet;
 - (ii) The projection is no closer to a rear property line than three feet; and
 - (iii) The projection does not exceed 15 feet in height, unless greater height is permitted by obtaining a use permit per Section 307.
- b. PLANNED RESIDENTIAL DEVELOPMENTS AND PLANNED AREA DEVELOPMENTS. The following provisionS applies APPLY to development in the average lot and RE-35, R1-18, R1-10, R1-8, R1-6, R-2, R-3, R-3A, R-4, AND R-5 DISTRICTS WHEN DEVELOPED IN ACCORDANCE WITH THE Planned Residential Development options of Sections 609 through 618, AND SUBDIVISIONS DEVELOPED AS PLANNED AREA DEVELOPMENTS PER SECTION 635:
 - (1) There shall be no projections into the required front or rear yard or required perimeter setbacks except:
 - (a) A roof overhang may project not more than three feet into either of these yard AREAS; and

August 29, 2025 Page 154 of 173

- (b) An attached awning, open-porch, PERGOLA, TRELLIS/ARBOR, OR BALCONY or other similar shade structure may project not more than ten feet into the required rear yard PERIMETER BUILDING SETBACK provided that the structure shall neither cover more than two hundred 200 square feet nor come closer than three feet to a side or rear property line.
- (c) A CLOSED PROJECTION (WHICH MAY INCLUDE AN ATTACHED ADU) MAY PROJECT INTO THE REQUIRED PERIMETER BUILDING SETBACKS, SUBJECT TO THE FOLLOWING:
 - (I) THE PROJECTION IS NO CLOSER TO A SIDE PROPERTY LINE THAN FIVE FEET;
 - (II) THE PROJECTION IS NO CLOSER TO A REAR PROPERTY LINE THAN THREE FEET; AND
 - (III) THE PROJECTION DOES NOT EXCEED 15
 FEET IN HEIGHT, UNLESS GREATER HEIGHT
 IS PERMITTED BY OBTAINING A USE PERMIT
 PER SECTION 307.
- (2) A roof overhang may project no more than three feet into a required street side yard setback.
- c. **SINGLE-FAMILY INFILL (SFI) SUBDIVISIONS.** The following provisions apply to single-family attached residential development: SFI SUBDIVISIONS DEVELOPED IN ACCORDANCE WITH SECTION 608.I:
 - (1) Open Projections.

August 29, 2025 Page 155 of 173

- (a) An awning, open porch, or open balcony may project into any required setback not more than five feet.

 AN ATTACHED AWNING, PORCH, PERGOLA, TRELLIS/ARBOR, OR BALCONY MAY PROJECT UP TO FIVE FEET INTO ANY REQUIRED YARD THAT IS NOT A REQUIRED LANDSCAPE SETBACK.
- (b) Where an FULLY-DEDICATED alley exists, an ATTACHED awning, open-porch, PERGOLA, TRELLIS/ARBOR, or open-balcony may extend to the property line.
- (2) Closed Projections. A bay window, oriel, entrance, or vestibule, ten feet in width or less, may project not more than three feet into any required building setback YARD THAT IS NOT A REQUIRED LANDSCAPE SETBACK.

Amend Chapter 7, Section 702 (Off-Street Parking and Loading) to read as follows:

B. Site and Parking Space Design Standards.

2. **Space and aisle dimensions.** Dimensions for maneuvering aisles and for different types of parking spaces shall be as follows:

b. Surface parking:

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 156 of 173

(5) The combined depth of the parking space and the aisle width shall equal sixty-two (62) feet for a double loaded aisle and forty-three (43) feet for a single loaded aisle.

FOR RESIDENTIAL PROPERTIES HAVING NO MORE THAN FOUR PRIMARY DWELLING UNITS, THE MINIMUM DRIVE AISLE WIDTH MAY BE REDUCED TO 10 FEET FOR TWO-WAY TRAFFIC WHERE IT DOES NOT ALSO FUNCTION AS REQUIRED MANEUVERING FOR AN ADJACENT PARKING SPACE, AS APPROVED BY THE PDD TRAFFIC ENGINEER.

C. **Parking Requirements.** Off-street automobile parking space or area shall be provided according to the following table, except for large scale retail commercial uses (see Section 702.D). The parking ratios in the table identify the minimum level of parking required to serve that use and receive site plan approval.

Type of Land Use	Parking Requirements
***	***
Dwelling Unit, Multi-family	1.5 spaces per dwelling unit A minimum of 50% Of the required parking spaces, A MINIMUM OF 0.25 SPACES PER DWELLING UNIT must be provided as unreserved spaces WHEN THE LOT HAS FIVE OR MORE DWELLING UNITS.
	Per Section 608.F.6, if developing under the single-family infill development option per Sections 614 through 618.
Dwelling Unit, Single-Family Attached	2 spaces per PRIMARY DWELLING unit if not developing under the SFI option. The required spaces for each dwelling unit must be provided on the same lot. An additional 0.25 unreserved spaceS per dwelling unit must be provided elsewhere within the development for visitor parking.
Dwelling Unit, Single-Family Detached	2 spaces per 4-PRIMARY dwelling unit

August 29, 2025 Page 157 of 173

Type of Land Use	Parking Requirements
***	***

F. Special Parking Standards.

1. Residential DISTRICTS lots.

- a. Required parking spaces for single-family residential uses may SHALL not be located in the required front yard.
- b. Spaces in excess of those required for single-family residential uses may be located in the required front yard. However, all parking and maneuvering areas within the required front yard shall not exceed 50 percent of the area of the required front yard, except that a driveway shall not be required to be less than 18 feet in width unless otherwise stipulated by Historic Preservation.
 NO MORE THAN 50 PERCENT OF THE REQUIRED FRONT YARD SHALL BE USED FOR DRIVEWAYS, MANEUVERING AREAS, AND NON-REQUIRED PARKING SPACES. HP-ZONED LOTS MAY BE STIPULATED TO MAXIMUM PAVING THAT IS LESS THAN 50 PERCENT AS A PART OF THE HP APPROVAL PROCESS SET FORTH IN CHAPTER 8.
- c. Buses shall not be parked in the front yard of any residential district.

 A bus is any commercially licensed motor vehicle designed for carrying more than fifteen (15) 15 passengers and used for the transportation of persons as well as any motor vehicle, other than a taxicab, designed for the transportation of persons for compensation.
- d. Mobile homes shall not be parked in any residential district except as provided in Section 647.A.2.1 608.J.

August 29, 2025 Page 158 of 173

Amend Chapter 7, Section 703 (Landscaping, Fences, and Walls) to read as follows:

B. Landscaping and Open Areas-SPACE in Multiple-Family Development.

- 1. Purpose. Multiple-family dwellings UNITS can play a desired role by providing desired forms of housing in appropriately zoned locations. However, because the density of dwellings is greater than alternate forms of housing, there is a relatively greater need to ensure an appropriate residential setting, including both landscape amenities and adequate outdoor open areas. Although it is recognized that many multiple-family projects will wish to provide these in greater amounts, this section establishes minimum standards for these features. These standards also recognize both limitations in water availability as well as legitimate needs to use landscaping for shade, cooling, and visual relief. To these purposes, these standards distinguish between landscaped areas oriented to public street and the exterior of projects from that more internally oriented and for the use of residents. They provide for landscaping at the perimeter and in front yards to include waterless features and drought resistant plant materials. Higher water use landscaping is to be restricted to interior areas devoted to resident use.
- Landscaping and open space areas shall be provided as follows at the time
 of initial development and shall be maintained in a living condition on any lot
 subject to residential district standards with five or more dwelling units.
 PROPERTIES WITH FOUR OR FEWER DWELLING UNITS SHOULD
 REFER TO SECTION 507 TAB A, II.C.9, RESIDENTIAL LOT DESIGN
 REVIEW.

Amend Chapter 7, Section 710 (Hillside Development) to read as follows:

B. Applicability.

August 29, 2025 Page 159 of 173

- 2. Development of land in any zoning district within a hillside development area shall also be regulated by the provisions of THIS section, 32-32 of the Phoenix City Code, whether subdivided or not, and shall be subject to the following special conditions:
 - a. HILLSIDE DEVELOPMENT STANDARDS SHALL BE APPLIED IN PLACE OF THE DEVELOPMENT STANDARDS OF THE BASE ZONING DISTRICT OF A PROPERTY AS SET FORTH IN THIS SECTION, AND SHALL NOT BE MODIFIED BY A ZONING OVERLAY.
 - b. HILLSIDE DEVELOPMENT IS ALSO REGULATED BY THE PROVISIONS OF SECTION 32-32 OF THE PHOENIX CITY CODE, WHETHER SUBDIVIDED OR NOT.

C. Standards.

2. **Hillside development area standards.** Special yard, height, area, and coverage requirements for developments in the hillside areas in any zoning district shall be as follows:

Table 1

August 29, 2025 Page 160 of 173

HILLSIDE DEVELOPMENT AREA STANDARDS								
DEVELOPMENT OPTION	a. Single-family Residential (Conventional, Standard and Average Lot Options)	b. Single-family Residential (Planned Residential Development Option, and Planned Area Development)	c. Multi-Family Residential	d. Any Non- Residential Zoning District				
MINIMUM LOT AREA	18,000 square feet* *Lot areas of more than eighteen thousand (18,000) square feet may be required in order to provide a suitable building site meeting the grading standards of Section 32-32 of the Phoenix City Code. In no case shall residential lots contain an area less than the minimum area required by the zoning district in	As required by zoning district	as required by zoning district	As required by zoning district				

August 29, 2025 Page 161 of 173

HILLSIDE DEVELOPMENT AREA STANDARDS							
DEVELOPMENT OPTION	a. Single-family Residential (Conventional, Standard and Average Lot Options)	b. Single-family Residential (Planned Residential Development Option, and Planned Area Development)	c. Multi-Family Residential	d. Any Non- Residential Zoning District			
	which such lots are located.						
MINIMUM LOT DIF	MENSIONS						
• WIDTH • DEPTH	120* 120'* *Unless in conformance with Section 32-32(M) of the City Code	As required by zoning district	As required by zoning district	As required by zoning district			
REQUIRED SETB	ACKS						
• FRONT YARD	As required by zoning district	As required by zoning district	Minimum 30'*	As required by zoning district or minimum 30'*			
• REAR YARD	As required by zoning district	As required by zoning district	Minimum 30'*	Minimum 30'*			
• SIDE YARDS	As required by zoning district or	As required by zoning district or	Minimum 15'**Building	Minimum 15'*, whichever is			

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 162 of 173

HILLSIDE DEVELOPMENT AREA STANDARDS							
DEVELOPMENT OPTION	a. Single-family Residential (Conventional, Standard and Average Lot Options)	b. Single-family Residential (Planned Residential Development Option, and Planned Area Development)	c. Multi-Family Residential	d. Any Non- Residential Zoning District			
	ten (10) feet, whichever is greater	ten (10) feet, whichever is greater	heights greater than fifteen (15) feet: required yard plus one (1) additional foot for each foot of building height exceeding 15' measured from exterior boundaries	greater*Building heights greater than fifteen (15) feet: required yard plus one (1) additional foot for each foot of building height exceeding 15' measured from exterior boundaries			
MAXIMUM COVERAGE UNDER ROOF	The main building and all accessory buildings shall not occupy more than twenty-five percent (25%) of the hillside portion of the lot or parcel	The main building and all accessory buildings shall not occupy more than twenty five percent (25%) of the hillside portion of the lot or parcel	The main building and all accessory buildings shall not occupy more than twenty five percent (25%) of the hillside portion of the lot or parcel	The main building and all accessory buildings shall not occupy more than twenty five percent (25%) of the hillside portion of the lot or parcel or as required by zoning district, whichever is less			

August 29, 2025 Page 163 of 173

HILLSIDE DEVELOPMENT AREA STANDARDS								
DEVELOPMENT OPTION	a. Single-family Residential (Conventional, Standard and Average Lot Options)	b. Single-family Residential (Planned Residential Development Option, and Planned Area Development)	c. Multi-Family Residential	d. Any Non- Residential Zoning District				
MAXIMUM BUILDING HEIGHT	No building shall exceed a height of two (2) stories, not to exceed thirty (30) feet above the natural grade of the lot or parcel at any section through the structure	No building shall exceed a height of two (2) stories, not to exceed thirty (30) feet above the natural grade of the lot or parcel at any section through the structure	No building shall exceed a height of two (2) stories, not to exceed thirty (30) feet above the natural grade of the lot or parcel at any section through the structure	No building shall exceed a height of two (2) stories, not to exceed thirty (30) feet above the natural grade of the lot or parcel at any section through the structure				

August 29, 2025 Page 164 of 173

TABLE 710.C.2 HILLSIDE AREA DEVELOPMENT STANDARDS (A) (B) (C) SINGLE-FAMILY **MULTI-FAMILY CATEGORY** NON-RESIDENTIAL RESIDENTIAL RESIDENTIAL **DEVELOPMENT DEVELOPMENT DEVELOPMENT STANDARD: 18,000** SQUARE FEET, OR AS REQUIRED BY THE ZONING **NET LOT AREA** SAME AS BASE SAME AS BASE DISTRICT, (1) (MINIMUM) ZONING DISTRICT ZONING DISTRICT WHICHEVER IS GREATER PRD: SAME AS BASE **ZONING DISTRICT** STANDARD: 120 FEET LOT WIDTH (1) SAME AS BASE SAME AS BASE (2) (MINIMUM) ZONING DISTRICT ZONING DISTRICT PRD: SAME AS BASE ZONING DISTRICT STANDARD: 120 **FEET** LOT DEPTH (1) SAME AS BASE SAME AS BASE (3) (MINIMUM) ZONING DISTRICT ZONING DISTRICT PRD: SAME AS BASE ZONING DISTRICT DEVELOPMENT AS CALCULATED PER THE PROVISIONS OF SECTION 710.C.1 (4) DENSITY (MAXIMUM) SUBDIVIDED (5) LOTS AS CALCULATED PER THE PROVISIONS OF SECTION 710.C.1 (MAXIMUM) 30 FEET, OR AS FRONT YARD REQUIRED BY BASE SAME AS BASE SAME AS BASE (6) ZONING DISTRICT, SETBACK ZONING DISTRICT **ZONING DISTRICT** (MINIMUM) WHICHEVER IS GREATER.

August 29, 2025 Page 165 of 173

	TABLE 710.C.2 HILLSIDE AREA DEVELOPMENT STANDARDS						
CATI	EGORY	(A) SINGLE-FAMILY	(B) MULTI-FAMILY	(C) NON-RESIDENTIAL			
		RESIDENTIAL DEVELOPMENT	RESIDENTIAL DEVELOPMENT	DEVELOPMENT			
(7)	REAR YARD SETBACK (MINIMUM)	SAME AS BASE ZONING DISTRICT	SAME AS BASE ZONING DISTRICT	30 FEET, OR AS REQUIRED BY BASE ZONING DISTRICT, WHICHEVER IS GREATER.			
(8)	SIDE YARD SETBACK (MINIMUM)	STANDARD: 10 FEET OR AS REQUIRED BY BASE ZONING DISTRICT, WHICHEVER IS GREATER. PRD: SAME AS BASE ZONING DISTRICT	STANDARD: 10 FEET OR AS REQUIRED BY BASE ZONING DISTRICT, WHICHEVER IS GREATER. PRD: SAME AS BASE ZONING DISTRICT	15 FEET, OR AS REQUIRED BY BASE ZONING DISTRICT, WHICHEVER IS GREATER.			
(9)	PROJECTIONS	PER SECTION 701.A.3	PER SECTION 701.A.3	NOT PERMITTED			
(10)	PERIMETER SETBACKS (MINIMUM)	SAME AS BASE ZONING	G DISTRICT				
(11)	BUILDING HEIGHT (MAXIMUM)	EIGHT THE MAXIMUM PERMITTED HEIGHT OF 2 STORIES AND 30 FEET. AS					
(12)	FOR PORTIONS OF THE PROPERTY WHERE THE SLOPE IS EQUAL TO OR GREATER THAN 10 PERCENT: 25 PERCENT, OR AS						

August 29, 2025 Page 166 of 173

	TABLE 710.C.2 HILLSIDE AREA DEVELOPMENT STANDARDS								
CATI	EGORY	(A) SINGLE-FAMILY RESIDENTIAL DEVELOPMENT	(C) NON-RESIDENTIAL DEVELOPMENT						
(13)	COMMON OPEN SPACE (MINIMUM)	SAME AS BASE ZONING DISTRICT							
(14)	STREET FRONTAGE REQUIREMENT	SAME AS BASE ZONING DISTRICT							
(15)	OTHER APPLICABLE REGULATIONS:	HILLSIDE: SECTION 32-32, CITY CODE. DESIGN REVIEW: SECTION 507 TAB A. HILLSIDE: SECTION 32-32, CITY CODE. DESIGN REVIEW: SECTION 507 TAB A. MULTI-FAMILY: SECTION 703.B HILLSIDE: SECTION 32-32, CITY CODE. DESIGN REVIEW: SECTION 507 TAB A.							

- (1) MINIMUM DIMENSIONS MAY BE ADMINISTRATIVELY MODIFIED WHEN APPROVED IN ACCORDANCE WITH THE PROVISIONS OF CITY CODE SECTION 32-32.C.3.M, REGARDING PANHANDLE, DOUBLE FRONTAGE, AND OTHER UNORTHODOX LOTS.
- (2) STREET FRONTAGE REQUIREMENTS MAY BE ADMINISTRATIVELY MODIFIED WHEN APPROVED IN ACCORDANCE WITH THE PROVISIONS OF CITY CODE SECTION 32-32.C.3.N, REGARDING HILLSIDE STREET AND PAVING STANDARDS.

Amend Section 1203. Land Use Matrix (Downtown Code) to read as follows:

Section 1203. Land Use Matrix

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 167 of 173

C. Land Use Matrix.

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 168 of 173

	Warehouse		* * *	du	* * *	
	∖sn Buren		* * *	۵	* * *	
	Townsend Park		* * *	۵	* * *	
	Roosevelt South		* * *	۵	**	
	Roosevelt North		* * *	۵	* * *	
	Roosevelt East		* * *	d	***	
AS	McDowell Corridor		* * *	۵	***	
ER ARE	Evans Churchill West		* * *	۵	***	
CHARACTER AREAS	Evans Churchill East		* * *	۵	* * *	
Ö	East Evergreen		* *	۵	* * *	* * *
	Downtown Gateway		* * *	du	* * *	
	Commercial Corridors		* *	۵	* * *	
	Central Park		* *	۵	* * *	
	Business Core		* * *	du	* * *	
	bəMoiB		* * *	du	* * *	
	ACTIVE USE		* *		* * *	
LAND USE CATEGORIES		RESIDENTIAL USES	* * *	Dwelling Unit, Single-Family, Detached (Including Duplex and Triplex Uses)	***	

August 29, 2025 Page 169 of 173

D. Land Use Conditions. The following shall apply to uses that are permitted with conditions (pc) OR USE PERMIT (up) as indicated with a number that corresponds with the Land Use Matrix in Section 1203.C:

27. Single-Family Infill (SFI) subdivision, per Sections 608.F.6 and 614, Table 614.B. SECTION 608.I, except as modified below:

e. Frontage requirements: as per the applicable character area; or if lots front on a something other than a frontage zone, per the regulations of Sections 608.F.6 and 614, Table B, Column D SECTION 608.I.

g. Allowed uses: single-family attached dwelling units and home occupations per Section 608, except that units fronting a perimeter street (not an alley) may have additional uses as permitted per the applicable character area. Single-family detached units are permitted for no more than 20 percent of the units in an SFI development to allow for variety and efficiency of design.

Amend Section 1205. Frontage Elements (Downtown Code) to read as follows:

A. Active Front Yard (AFY). An active front yard is a frontage element intended for use on blocks with a high percentage of existing and/or historic single-family or duplex style residential structures. AFY is not permitted for use on sites with primary uses which are nonresidential, or on residential lots with more than two-FOUR PRIMARY dwelling units (not including ADUs). (R*)

August 29, 2025 Page 170 of 173

- 1. For sites with HP zoning or designation, both the building elevations and improvements in the frontage zone shall be constructed as approved by Historic Preservation.
- For sites not zoned or designated HP, buildings and improvements shall be installed in conformance with Section 507 Tab A II.C.8.5 (Individual Unit Design Standards) II.C.9 (RESIDENTIAL LOT DESIGN REVIEW). If any of the requirements of Section 507 Tab A II.C.8.5 II.C.9 conflict with provisions of the Downtown Code, Section 507 Tab A II.C.8.5 II.C.9 requirements shall prevail.

Amend Chapter 13, Section 1303 (Transect Lot Standards) to read as follows:

Section 1303. Transect Lot Standards

A. General Lot Standards.

- 1. Subdivisions shall comply with development standards per this chapter, including frontage standards, for all existing and newly created lots abutting public streets, private accessways, and private driveways, with the following caveats:
 - a. A development may instead utilize the Single-Family Infill development option-SUBDIVISION standards per Section 608.F.6 and Table 614.B, column D (except for the density, which is not restricted) 608.I if it meets all three of the following conditions:
 - (1) The development-SUBDIVISION consists solely of single-family dwelling units and allowable accessory uses;

Exhibit A: Z-TA-1-25-Y August 29, 2025 Page 171 of 173

(2) The development is located within the applicable area for the single-family infill development option or the infill development district as depicted on the map provided in Section 608.F.6; and

THE SUBDIVISION IS LOCATED WITHIN THE INFILL DEVELOPMENT DISTRICT IDENTIFIED IN THE GENERAL PLAN OR IS LOCATED WITHIN THE AREA IDENTIFIED AS "APPLICABLE AREA FOR SINGLE-FAMILY INFILL DEVELOPMENT" SHOWN IN FIGURE 608.I.1 AND HAS OBTAINED USE PERMIT APPROVAL; AND

- (3) The development-SUBDIVISION is located in any transect other than T3.
- b. All subdivisions must comply with the requirements of the Subdivision Ordinance (Chapter 32 of the City Code), as may be modified by the Subdivision Committee to further the goals of the Walkable Urban Code.
- 2. All developments adjacent to single-family zoning districts shall follow the same setback and stepback standards as the single-family infill development option (Table 614.B, column D); with additional requirements as follows: BE SUBJECT TO THE FOLLOWING STEPBACK AND SETBACK REQUIREMENTS:
 - a. THERE SHALL BE A 15-FOOT MAXIMUM HEIGHT WITHIN TEN FEET OF A SINGLE-FAMILY ZONING DISTRICT, WHICH HEIGHT MAY BE INCREASED ONE FOOT FOR EACH ADDITIONAL ONE FOOT OF BUILDING SETBACK TO THE MAXIMUM PERMITTED HEIGHT. THIS stepback provision shall not exceedREQUIRE GREATER THAN A maximum 75-foot setback from rear and side property lines for building height before THE maximum height IS allowed.

August 29, 2025 Page 172 of 173

Section 1306. Land Use Matrix

B. Use Regulations.

Table 1306.1 Land Use Matrix

CATEGORY: RESIDENTIAL USES	Т3	Т4	T5:2	T5:3	T5:5	T5:6	T5:7	T6:7 T6:15	T6:22 T6: HWR
***	***	***	***	***	***	***	***	***	***
Dwelling Unit, Single-Family Detached (Including Duplex and Triplex Uses)	Р	Р	NP	NP	NP	NP	NP	NP	NP
Dwelling Unit, Single-Family Attached	Р	Р	Р	Р	Р	Р	Р	Р	Р
SINGLE-FAMILY INFILL SUBDIVISION	<u>NP</u>	<u>PC</u>	<u>PC</u>						
***	***	***	***	***	***	***	***	***	***

C. Residential Uses, Land Use Conditions.

4. SINGLE-FAMILY INFILL SUBDIVISION, AS SET FORTH IN SECTION 1303.A.1.a.

August 29, 2025 Page 173 of 173

Amend Chapter 13, Section 1307 (Parking and loading standards) to read as follows:

Section 1307. Parking and loading standards.

B. Required Vehicular Parking.

Table 1307.1 Minimum Required Vehicular Parking

USE	MEASURE	Т3	T4	T5 1—5 Stories	T5 6—10 Stories	Т6	MEASURE
***	***	***	***	***	***	***	***
Residential, Single-Family Attached	Per unit	Per Section 608.F.6 608.I, if developing under the provisions of Section 1303.A.1.a; otherwise per Section 702.					
***	***	***	***	***	***	***	***

Exhibit B: Sketch Map

