# **ATTACHMENT A**

# THIS IS A DRAFT COPY ONLY AND IS NOT AN OFFICIAL COPY OF THE FINAL, ADOPTED ORDINANCE

# ORDINANCE G-

AN ORDINANCE AMENDING THE ZONING DISTRICT MAP ADOPTED PURSUANT TO SECTION 601 OF THE CITY OF PHOENIX ZONING ORDINANCE BY CHANGING THE ZONING DISTRICT CLASSIFICATION FOR THE PARCEL DESCRIBED HEREIN (CASE Z-55-25-8) FROM R-3 RSIOD AIOD (MULTIFAMILY RESIDENCE DISTRICT, RIO SALADO INTERIM OVERLAY DISTRICT, AIRPORT NOISE IMPACT OVERLAY DISTRICT) TO A-2 RSIOD AIOD (INDUSTRIAL DISTRICT, RIO SALADO INTERIM OVERLAY DISTRICT, AIRPORT NOISE IMPACT OVERLAY DISTRICT).

BE IT ORDAINED BY THE COUNCIL OF THE CITY OF PHOENIX, as

follows:

SECTION 1. The zoning of a 0.57 acre site located at the northwest corner of 14th Street and University Drive in a portion of Section 16, Township 1 North, Range 3 East, as described more specifically in Exhibit "A," is hereby changed from "R-3 RSIOD AIOD" (Multifamily Residence District, Rio Salado Interim Overlay District, Airport Noise Impact Overlay District) to "A-2 RSIOD AIOD" (Industrial District, Rio Salado Interim Overlay District, Airport Noise Impact Overlay District).

SECTION 2. The Planning and Development Director is instructed to modify the Zoning Map of the City of Phoenix to reflect this use district classification change as shown in Exhibit "B."

SECTION 3. Due to the site's specific physical conditions and the use district applied for by the applicant, this rezoning is subject to the following stipulations, violation of which shall be treated in the same manner as a violation of the City of Phoenix Zoning Ordinance:

- 1. A minimum 20-foot-wide landscape setback shall be provided along 14th Street and University Drive. This landscape setback shall be planted with minimum 2-inch caliper trees, planted 20 feet on center, or in equivalent groupings, and five 5-gallon shrubs per tree, as approved by the Planning and Development Department. When possible, the developer shall use existing trees and landscaping to meet the landscaping requirements. Where utility conflicts exist, the developer shall work with the Planning and Development Department on alternative design solutions.
- 2. Outdoor site lighting shall be fully shielded, as approved or modified by the Planning and Development Department.
- 3. Fencing and walls oriented towards a public street or trail shall have a finished appearance and contain decorative elements including but not limited to adobe, glass, metal (including rusted metal), stone (stone veneer), wood, or other material consistent with a natural environment, as approved by the Planning and Development Department. Where gates are provided for vehicular access, these gates shall be decorative and may include minor perforations to accommodate wind loads. The perforation shall not exceed 50% of the gate surface area.
- 4. A minimum of 10% of the required shrubs, shall be a native milkweed or other native nectar species, and shall be planted in groups of three or more, as approved by the Planning and Development Department.
- 5. If a building is proposed, a minimum 20-foot building setback shall be provided along the east perimeter of the site.
- 6. If a building is proposed, where pedestrian walkways cross a vehicular path, the pathway shall be constructed of decorative pavers, stamped or colored concrete, or other pavement treatments that visually contrasts parking and

- drive aisle surfaces, as approved by the Planning and Development Department.
- 7. A minimum of one green stormwater infrastructure (GSI) element for stormwater management shall be implemented, as approved or modified by the Planning and Development and/or Street Transportation departments. This includes but is not limited to stormwater harvesting basins, bioswales, permeable pavement, etc., per the Greater Phoenix Metro Green Infrastructure and Low Impact Development Details for Alternative Stormwater Management.
- 8. A minimum of 25% of the surface of the designated employee or customer parking areas shall be shaded, as approved by the Planning and Development Department. Shade may be achieved by structures or by minimum 2-inch caliper, drought tolerant, shade trees, or a combination thereof.
- 9. Natural turf shall only be utilized for required retention areas (bottom of basin, and only allowed on slopes if required for slope stabilization), as approved by the Planning and Development Department.
- 10. A minimum 30 feet of right-of-way shall be dedicated and constructed for the west side of 14th Street and the south side of University Drive, to complete the transition from 14th Street to University Drive.
- 11. A minimum 4-foot wide sidewalk shall be constructed on the west side of 14th Street and the south side of University Drive, adjacent to the development.
- 12. Replace any broken or out-of-grade curb, gutter, sidewalk, and curb ramps on all streets and upgrade all off-site improvements to be in compliance with current ADA guidelines.
- 13. All streets within and adjacent to the development shall be constructed with paving, curb, gutter, sidewalk, curb ramps, streetlights, median islands, landscaping and other incidentals, as per plans approved by the Planning and Development Department. All improvements shall comply with all ADA accessibility standards.
- 14. If determined necessary by the Phoenix Archaeology Office, the applicant shall conduct Phase I data testing and submit an archaeological survey report of the development area for review and approval by the City Archaeologist prior to clearing and grubbing, landscape salvage, and/or grading approval.
- 15. If Phase I data testing is required, and if, upon review of the results from the Phase I data testing, the City Archaeologist, in consultation with a qualified archaeologist, determines such data recovery excavations are necessary, the applicant shall conduct Phase II archaeological data recovery excavations.

- 16. In the event archaeological materials are encountered during construction, the developer shall immediately cease all ground-disturbing activities within a 33-foot radius of the discovery, notify the City Archaeologist, and allow time for the Archaeology Office to properly assess the materials.
- 17. Prior to final site plan approval, the landowner shall execute a Proposition 207 waiver of claims form. The waiver shall be recorded with the Maricopa County Recorder's Office and delivered to the City to be included in the rezoning application file for record.

SECTION 4. If any section, subsection, sentence, clause, phrase or portion of this ordinance is for any reason held to be invalid or unconstitutional by the decision of any court of competent jurisdiction, such decision shall not affect the validity of the remaining portions hereof.

PASSED by the Council of the City of Phoenix this 15th day of October, 2025.

	MAYOR
ATTEST:	
Denise Archibald, City Clerk	
APPROVED AS TO FORM: Julie M. Kriegh, City Attorney	
By:	
REVIEWED BY:	

Jeffrey Barton, City Manager

Exhibits:

A – Legal Description
B – Ordinance Location Map



### **EXHIBIT A**

# **LEGAL DESCRIPTION FOR Z-55-25-8**

A portion of the Southeast Quarter of Section 16, Township 1 North, Range 3 East of the Gila and Salt River Base and Meridian, Maricopa County, Arizona, more particularly described as follows:

The south 75.00 feet of Lot 11, of STEPHEN SUBDIVISION, as recorded in Book 11 of Maps, Page 1, in the office of the County Recorder of Maricopa County, Arizona.

Commencing at the southeast corner of said Lot 11;

Thence North 00°11'49" West, along the east line of said Lot 11, a distance of 75.00 feet;

Thence North 89°31'12" West, parallel with the south line of said Lot 11, a distance of 314.30 feet to a point on the west line of said Lot 11;

Thence South 00°11'50" East, along the west line of said Lot 11, a distance of 75.00 feet to the southwest corner of said Lot 11;


Thence South 89°31'12" East, along the south line of said Lot 11, a distance of 314.30 feet to the Point of Beginning.

Containing 23,572 square feet or 0.541 acres, more or less.

# ORDINANCE LOCATION MAP

ZONING SUBJECT TO STIPULATIONS: \*
SUBJECT AREA: ■ ■ ■ •

Zoning Case Number: Z-55-25-8
Zoning Overlay: Rio Salado Interim Overlay District and Airport Noise Impact Zone Overlay District
Planning Village: Central City

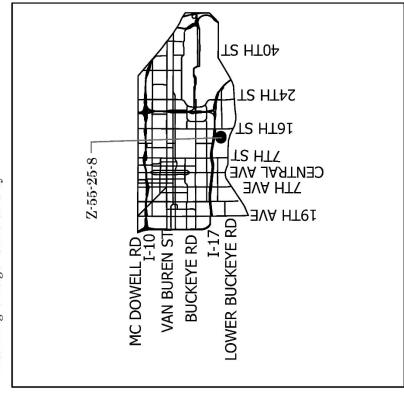

UNIVERSITY DR

A-2 RSIOD AIOD\*

TS HT41

NOT TO SCALE

260 Feet

130

65

0



Drawn Date: 9/16/2025

ddtShared/Department ShareVinformation Systems/PL GiSNS Team/Core Functions/Zoning/SuppMaps OrdMaps/2025 Ord/10-15-251/0-15-25 aprx